

DIM. A	2-60 PINS	± 0.20
	62-68 PINS	± 0.30

NOTE:

- MATERIAL:
HOUSING: HIGH TEMP PLASTIC, UL94-V0, BLACK
TERMINAL: COPPER ALLOY, SQ=0.40±0.03MM
- FINISH:
TERMINAL: GOLD AT CONTACT,
G/F OVER 1um(40u")MIN Ni OVER ALL
- SPEC.:
PRODUCT SPEC: GS-12-629
PACKING SPEC: GS-14-1420
- THE HSG. WILL WITHSTAND EXPOSURE TO 260C PEAK TEMP. FOR 10 SEC. IN A CONVECTION INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- PRODUCT NUMBERING:
20021621 - 0 0 0 XX X X LF

LEAD FREE

PLATING:

- 1:GOLD FLASH ALL OVER
- 4:0.25um(10U")GOLD AT CONTACT
- 8:0.76um(30U")GOLD AT CONTACT
- 9:1u" GOLD OVER 30u" PdNi AT CONTACT


PACKING

- T: TUBE
- D: TUBE + CAP
- C: T&R + CAP (30 POS)

PIN COUNT
SEE TABLE 1

TABLE 1

DASH No.	Dim.	Amount of Pins	Dim.A	Dim.B	Dim.C
-000 06 XX LF	6	6	2.54	18.31	8.46
-000 10 XX LF	10	10	5.08	20.85	11.00
-000 12 XX LF	12	12	6.35	22.12	12.27
-000 14 XX LF	14	14	7.62	23.39	13.54
-000 16 XX LF	16	16	8.89	24.66	14.81
-000 20 XX LF	20	20	11.43	27.20	17.35
-000 26 XX LF	26	26	15.24	31.01	21.16
-000 30 XX LF	30	30	17.78	33.55	23.70
-000 34 XX LF	34	34	20.32	36.09	26.24
-000 40 XX LF	40	40	24.13	39.90	30.05
-000 44 XX LF	44	44	26.67	42.44	32.59
-000 50 XX LF	50	50	30.48	46.25	36.40
-000 60 XX LF	60	60	36.83	52.60	42.75
-000 64 XX LF	64	64	39.37	55.14	45.29
-000 66 XX LF	66	66	40.64	56.41	46.56
-000 68 XX LF	68	68	41.91	57.68	47.83

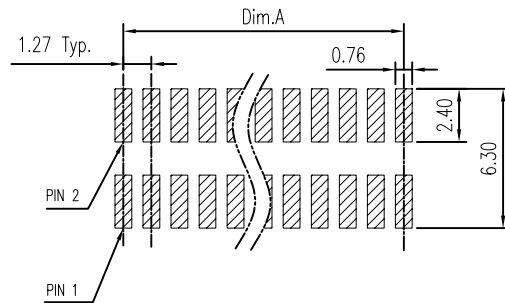

mat'l. code		surface ISO1302 ✓		tolerance ISO1101 ISO406		projection MM		product family MINITEK	
ltr		ecn no dr date		tolerances unless otherwise specified		title		1.27X1.27MM BTB EJECT HEADER SMT	
A		T09-1117 S.LIN 09/15/09		angles		MM		dwg no	
B		T10-0027 S.LIN 01/20/10		0.X±0.38		scale 2:1		sheet 1 of 1 size	
C		T-005600 S.LIN 01/16/12		0.XX±0.25		FCI		20021621 A4	
D		ELX-N-010367 ZK 01/16/12 dr		0.XXX±0.10		STERLING LIN 09/15/09		type Product Customer Drawing	
E		ELX-N-010623 ZK 02/12/12 eng		STERLING LIN 09/15/09		appd JOSEPH 09/15/09			
F		ELX-N-1727 TIM 03/20/14 chr		GRAY HSEH 09/15/09					
sheet index		revision sheet		F 1					