


NOTES:

1.0 SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC TO 18.0 GHz.
- 1.2 MAXIMUM INPUT POWER: 3 WATTS AVG. AT +25°C
DERATED LINEARLY TO 1 WATT AT +125°C.
- 1.3 OPERATING TEMP. RANGE: -65°C TO +125°C.
- 1.4 IMPEDANCE: 50 OHMS.
- 1.5 MAXIMUM VSWR: 1.05 + .008f(GHz)

△ 2.0 MARK THIS SURFACE USING WHITE INK.

3.0 DIMENSION IN BRACKETS ARE IN MILLIMETERS.

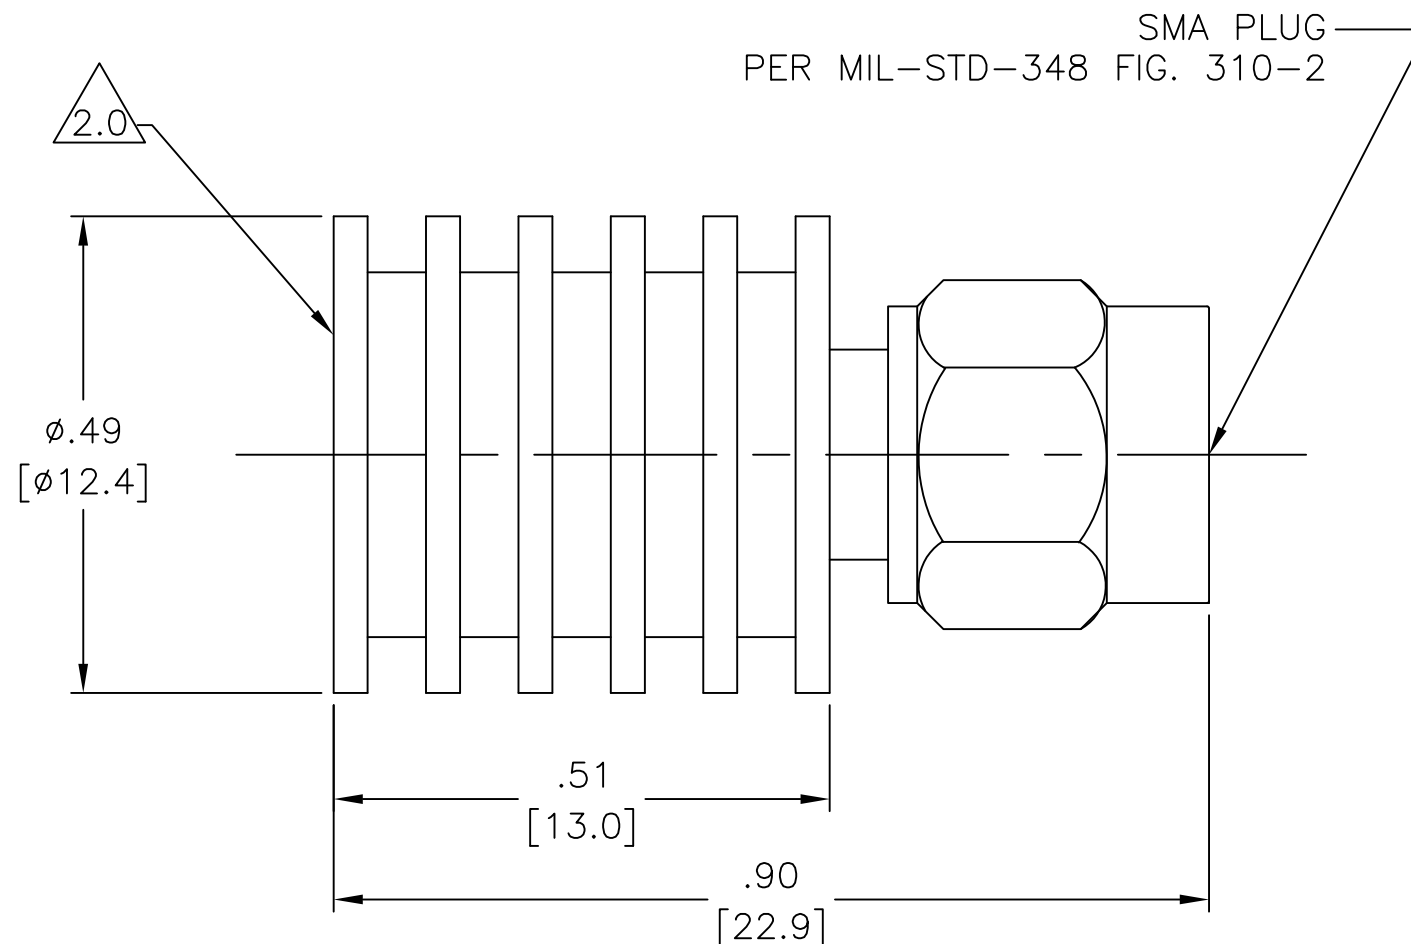

REV.	DESCRIPTION	DATE
I	RELEASED	12/19/83
A	ECR 2556	12/19/83
B	ECR 6545	6/30/89
C	ECR 6943	11/13/89
D	ECR 7291	4/2/90
D1	CHNGE XX TO MX	12/11/90
D2	UPDATE MODEL NO.	5/17/91
E	REDRAW ON CAD	5/27/94
E1	ADDED TITLEBLOCK	10/27/05
H	ECO 23128	12/29/10
J	ECO 23453	4/4/11

DWG. NO. WAS: 02749-01-00
& TRM-2057-MX-000-07

<p>NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.</p> <p>UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'</p>	<p>CAGE CODE 34078</p>	<p>MIDWEST MICROWAVE</p>	
	<p>EMERSON Network Power Connectivity Solutions</p>	<p>TITLE TERMINATION OUTLINE DRAWING</p>	
<p>DRAWN/DATE M.HOLLMAN 5/27/94</p>	<p>ENG./DATE G.KOZAK 6/7/94</p>	<p>DRAWING NUMBER TRM-2057-MO-SMA-07-01</p>	<p>REV. J</p>
<p>CHECKED/DATE A.BEATTY 6/1/94</p>	<p>APPROVED/DATE</p>	<p>SCALE: 5:1</p>	<p>SHEET 1 of 1</p>