

工	Ω	П	m	0



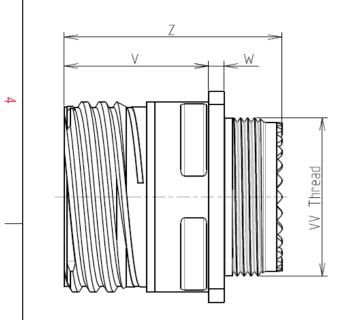

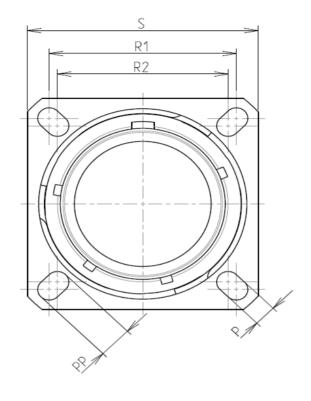

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: −65°C to +175°C				
-Salt Spray	: 500 hours				

: 11.73 g ± 10%

8D 0

G

11

Ζ

98

Ρ

F

D

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-98

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

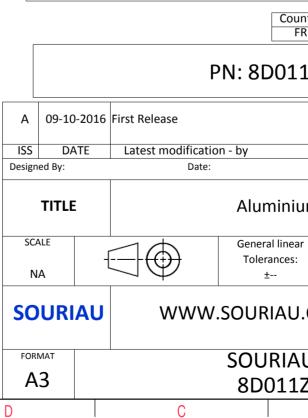

	œ		A			
		I				
		0			4	
	60					
	1					
7						
	-					
		1				
	2					
					3	
S EXA	AMPLE					
· any i	non-conformit	ty or damage	2			
s which does not comply with er of the Parties or by a third party						
	on, technical n		~ 7			
untry	Jurisd	liction & Con	trol List]		
FR		Not Listed]]	2	
1Z9	1Z98PD					
		CUSTOR		MOD N°		
		CUSTOME	R DRAWING			
um	Receptacl	e 8D ser	ies			
ar		NPRDS	/ PROJECT			
:			359		1	
	This document is the property of SOURIAU					
J.CC	it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
	8PD-C			1/2		
	В		А		J	

		۵	٣	m	D	0	
		Contact Layout					Panel Cutout
4	-×($ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & $			1	SQUARE FLANGE RECEPTACLE (TYP REAR MOUNTING	
	Cont post ID A B C C D E F Sheli Arrangement Numb	Mon (mm) X-axis (mm) Y-axis (mm) +.000 (0.00) +.130 (3.30) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.77) 130 (3.30) +.000 (0.00) +.000 (0.00) +.000 (0.00)	1		¥ ∑ –		ØI.
	Shell Arrangement no. Numbrand conta 11 -98 6	cts contacts rating location					Dim
ω							ØA ØAA R1 ØT
						the Specifications iss	the Products whi
N							Country FR
						PN	l: 8D011Z
					A 09-10-20 ISS DATE	16 First Release	by
					Designed By:	Date:	
					SCALE		Aluminium General linear
<u> </u>					NA		Tolerances: ±
					SOURIA	J WWW.S	OURIAU.CO
					FORMAT A3		SOURIAU 8D011Z9
	Н	G	F	E	D	С	

