



Hong Kong Automotive X'tals Limited

Ceramic SMD Crystals

3215SX Series

Model M8 3.2 x 1.5 Ceramic SMD



Frequency Range : 32.768KHz


Features :

- High reliability & low cost unit
- Compact design
- RoHS compliant
- Lead free
- 260°C reflow compatible
- AEC-Q200 Stress Qualified Component

QUARTZ CRYSTALS

Standard Specifications	Item	Value
Frequency Range	ESR	32.768KHz 70kOhm Max.
Frequency Tolerance		±20ppm (or specify)
Temperature Coefficient		-0.040±0.006ppm/°C ²
Operating Temperature Range		-40° C to +85° C (or specify)
Operable Temperature Range		-40° C to +125° C
Turnover Temperature		25°C±5°C
Drive Level		0.1µW Typ. (0.5µW Max.)
Load Capacitance		12.5pF (or specify)
Shunt Capacitance		1.8pF Max.

Dimension

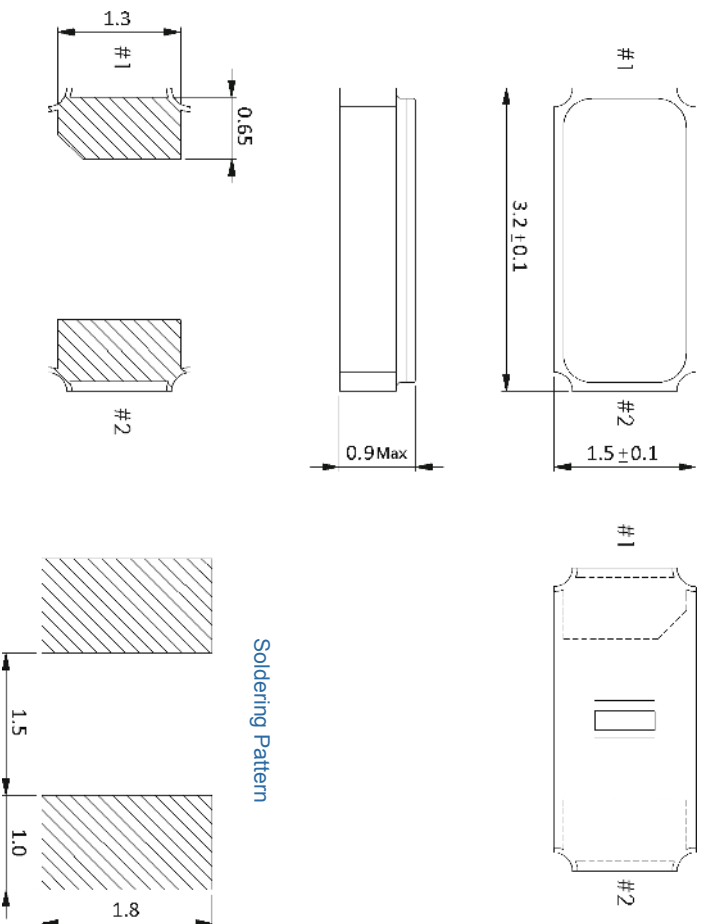

Note :

1. Manufacturer reserves the right to change the specification and content of this product for improvement without notification.
2. Custom specification is welcome. Please contact our sales representative for further details.
3. If the crystal is intended for applications which have direct impact on human life and properties, and require a high degree of reliability and safety concerns, customers must provide full information such as but not limit to the application, electrical and reliability specification at the inquiry beginning stage.
4. Customers have to agree to the "Guideline for handling crystal units" and "Standard Terms and Condition of Sales" which is printed this catalog before placing orders to our company or our distributes. There are also unpredictable factors such as applied condition, oscillation margin and etc and customers must check them beforehand. In case of queries, please do not fail to send inquiry to our company before ordering.

Ver 1.1



<https://www.hongkongcrystal.com>
Email: inquiry@hongkongcrystal.com