


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	WIRE RANGE AWG [mm <sup>2</sup> ]	MAX. WIRE INSUL. DIA.	HOUSING COLOR	DIMENSIONS in. [mm]				TOOLS
				L ± .03 [0,8]	B ± .01 [0,3]	C ± .02 [0,3]	D DIA	
EV18-P47B	#22-18 [0,5-1,0]	.15 [3,8]	RED	.97 [24,6]	.07 [1,8]	.49 [12,4]	.15 [3,8]	CT-100A **CT-260 CT-600A (CT-550CH) CT-1550 CT-1551 CT-2500 (CT-2550CH)
EV14-P47B	#16-14 [1,5-2,5]	.17 [4,3]	BLUE	.97 [24,6]	.07 [1,8]	.49 [12,4]	.17 [4,3]	
EV10-P55*	#12-10 [4,0-6,0]	.25 [6,4]	YELLOW	1.10 [27,9]	.10 [2,5]	.55 [14,0]	.25 [6,35]	

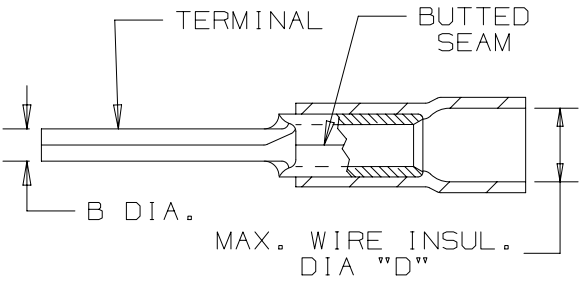

\* EV10-P55 NOT UL LISTED, BRAZED SEAM, 300V MAX VOLTAGE  
 \*\*PANDUIT APPROVED TOOL

NOTES:

- UL LISTED FOR:
  - A. SOILD OR STRANDED COPPER WIRE ONLY
  - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
  - C. 600V. MAX. VOLTAGE RATING
- MATERIAL:
  - A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED
  - B. HOUSING: VINYL, COLOR CODED
- WIRE STRIP LENGTH: 5/16" <sup>+1/32</sup><sub>-0</sub> [7,9mm <sup>+0,8</sup><sub>-0</sub>]
- SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

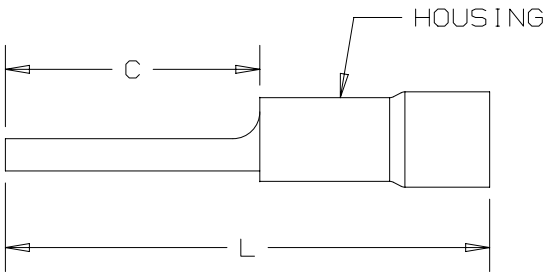

LISTED  
587H  
E52164

00	2/18	JHNU	TMR	RGB	RELEASED				00123SH
REV	DATE	BY	CHK	APR	DESCRIPTION		ECN		

TITLE		STRONGHOLD PIN TERMINAL VINYL INSULATED #22-10 AWG CUSTOMER DRAWING	
ITEM REVISION NAME		00123STB/00	
DATASET FILE NAME		00123STB/00	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]		MATERIAL:  SEE NOTES	
.X ±	.XXX ±	DRAWING NUMBER: SH41335	
.XX ±	ANGLES ±		
THIRD ANGLE PROJECTION			
DRAWN BY	DATE	CHK	SCALE
JHNU	2/18	TMR	N.T.S.
SHT 1 OF 1			SIZE A

D10100DA/16