THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – TE Connectivity Ltd. ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REV & REDRAWN PER 0720-0061-93	4-19-93	—	DAP
	B1	REVISED PER ECO-18-002105	27FEB2018	RS	DR

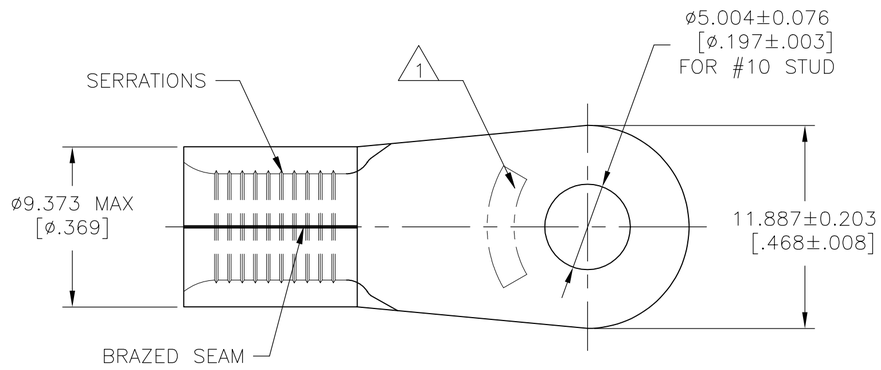

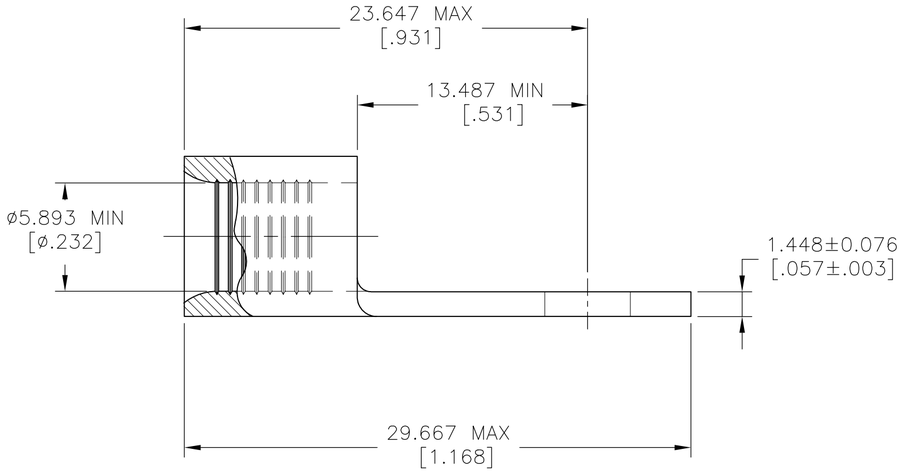

AMP WIRE RANGE
6 AWG SOLID OR STRANDED

1 STAMP AMP 6* APPROX AS SHOWN

PRELIMINARY	2000	BULK/BAG	323169-1
	100	LOOSE PIECE	323169
	QUANTITY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:
343°C [649°F] MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE,
10.5-16.8mm²[20,800-33,100] CIR MILS
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± 0.127[.005]
4 PLC ± –
ANGLES ± –

MATERIAL
COPPER PER ASTM B-152
ANNEALED

FINISH NICKEL PLATE
0.00762[.000300]
MIN EXT THK PER
SAE AMS QQ-N-290

DWN TA BRINKMAN 4-19-93
CHK DA PATTERSON 4-19-93
APVD JL MECKLEY 4-19-93
PRODUCT SPEC 108-32046
APPLICATION SPEC 114-2162
WEIGHT

TE Connectivity Ltd.

NAME
TERMINAL, RING TONGUE,
HEAT RESISTANT,
STRATO-THERM™,6 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-323169	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV B1

323169