# 1-967624-4 V ACTIVE

### AMP | Junior Power Timer

TE Internal #: 1-967624-4

Housing for Female Terminals, Wire-to-Wire / Wire-to-Board, 18 Position, .197 in [5 mm] Centerline, Yellow, Wire & Cable, Signal,

Junior Power Timer

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > Timer Connector Housing



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in]

Connector System: Wire-to-Board, Wire-to-Wire

Number of Positions: 18

Centerline (Pitch): 5 mm [.197 in]

All Timer Connector Housing (589)

### **Features**

### **Product Type Features**

Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Board, Wire-to-Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	18
Number of Rows	3
Electrical Characteristics	
Nominal Voltage Architecture	28 V
Body Features	
Primary Product Color	Yellow

А

Connector & Keying Code

**Contact Features** 



Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Contact Current Rating (Max)	30 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF
	5 mm[.197 in]
Centerline (Pitch)	3 [[[[. 177 ][]]
Dimensions	3 Hillig. 177 Hilj
	26.5 mm[1.043 in]
Dimensions	
Dimensions  Connector Height	26.5 mm[1.043 in]
Dimensions  Connector Height  Product Length	26.5 mm[1.043 in]
Dimensions  Connector Height  Product Length  Usage Conditions	26.5 mm[1.043 in] 34.8 mm[1.37 in]
Dimensions  Connector Height  Product Length  Usage Conditions  Operating Temperature (Max)	26.5 mm[1.043 in] 34.8 mm[1.37 in] 100 °C[212 °F]
Dimensions  Connector Height  Product Length  Usage Conditions  Operating Temperature (Max)  Operating Temperature Range	26.5 mm[1.043 in] 34.8 mm[1.37 in] 100 °C[212 °F]
Dimensions  Connector Height  Product Length  Usage Conditions  Operating Temperature (Max)  Operating Temperature Range  Operation/Application	26.5 mm[1.043 in]  34.8 mm[1.37 in]  100 °C[212 °F]  -30 – 100 °C[-22 – 212 °F]
Dimensions  Connector Height  Product Length  Usage Conditions  Operating Temperature (Max)  Operating Temperature Range  Operation/Application  Circuit Application	26.5 mm[1.043 in]  34.8 mm[1.37 in]  100 °C[212 °F]  -30 – 100 °C[-22 – 212 °F]
Dimensions  Connector Height  Product Length  Usage Conditions  Operating Temperature (Max)  Operating Temperature Range  Operation/Application  Circuit Application  Packaging Features	26.5 mm[1.043 in]  34.8 mm[1.37 in]  100 °C[212 °F]  -30 – 100 °C[-22 – 212 °F]  Signal
Dimensions  Connector Height  Product Length  Usage Conditions  Operating Temperature (Max)  Operating Temperature Range  Operation/Application  Circuit Application  Packaging Features  Packaging Method	26.5 mm[1.043 in]  34.8 mm[1.37 in]  100 °C[212 °F]  -30 – 100 °C[-22 – 212 °F]  Signal

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold




EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

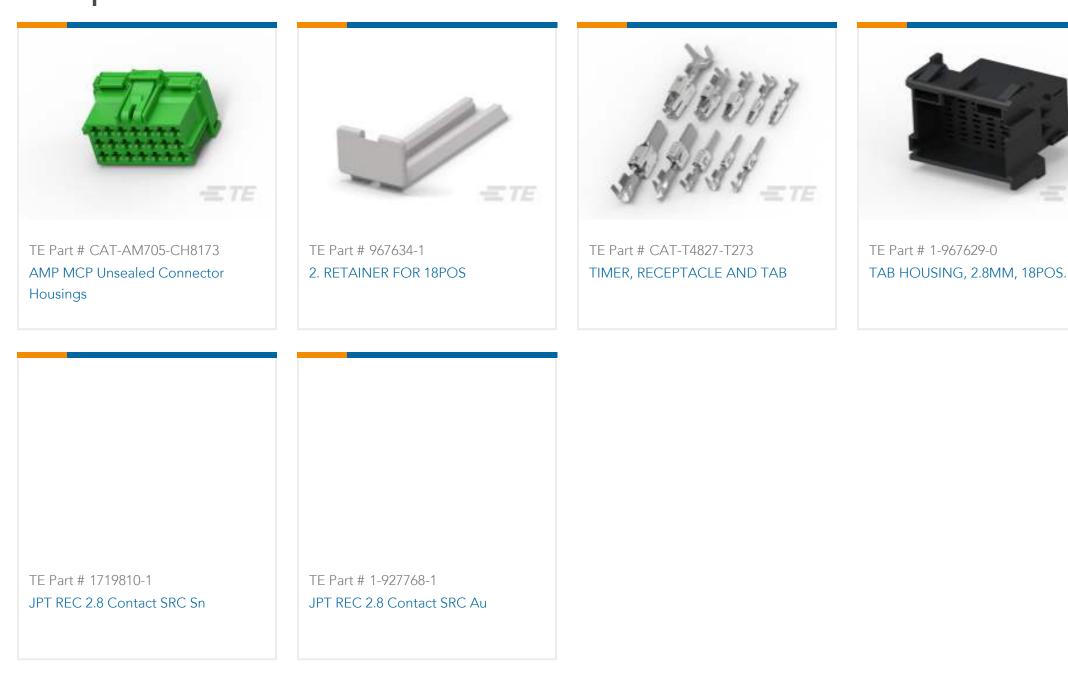

Also in the Series | Junior Power Timer





Automotive Connector Caps & Covers (5)



Automotive Housings(252)



Automotive Terminals(86)



Busbars & Terminals(1)



Connector Seals & Cavity Plugs(10)



Insertion & Extraction Tools(8)



Module Components(6)



Other Automotive Connector Accessories(1)



PCB Headers & Receptacles(1)

# Customers Also Bought







### **Documents**

Product Drawings

JUN-POW-TIM GEH 18P

English

**CAD Files** 

3D PDF

3D

**Customer View Model** 



ENG\_CVM\_CVM\_1-967624-4\_C.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-967624-4\_C.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-967624-4\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Datasheets & Catalog Pages

Timer Interconnection System

English

**Product Specifications** 

**Product Specification** 

English

**Product Specification** 

English