


### Specifications

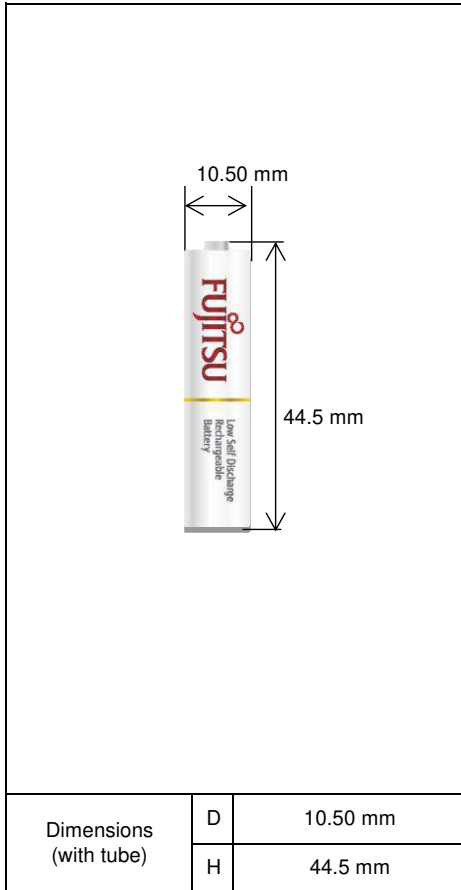


Type : Nickel-Metal Hydride Battery		Size : AAA Consumer Type	
Capacity <sup>1)</sup>	Typical	800mAh	
	Minimum	750mAh	
Nominal Voltage		1.2V	
Charging Current x Time	Fast Charge <sup>2)</sup>	800mA × 1.1h	
Ambient Temp.	Charge Condition	Fast Charge <sup>2)</sup>	0°C - 40°C
	Discharge Condition		0°C - 50°C
	Storage Condition	Less than 90days	-20°C - 40°C
Less than 1year		-20°C - 30°C	
Internal Impedance <sup>3)</sup> (after discharge to E.V.=1.0V)		Approx. 40mΩ (at 1000Hz)	
Weight <sup>4)</sup>		Approx.13g	
Size <sup>4)</sup> :(Diameter) x (Height)		10.5(D) x 44.5(H) mm	

- 1)Single cell capacity under the following condition.  
Charge : 80mA×16h, Discharge : 160mA(E.V.=1.0V) at 25°C
- 2)Use recommended charging system.
- 3)After a few charge and discharge cycles under the above 1) condition.
- 4)With tube.

### Typical Characteristics

#### Charge

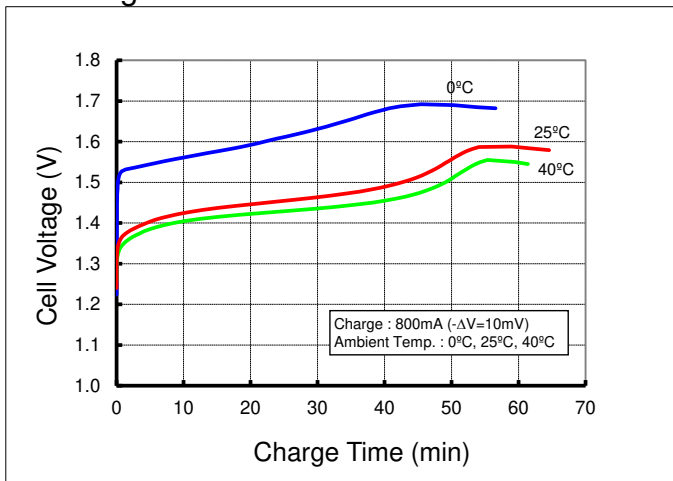

#### Discharge

