# HDP26-24-33PN - ACTIVE

### DEUTSCH | DEUTSCH HD, DEUTSCH HDP

TE Internal #: HDP26-24-33PN Housing for Male Terminals, Wire-to-Wire, 33 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid

#### View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HDP20 Housings



Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 1.02 mm [.04 in ]

Connector System: Wire-to-Wire

Number of Positions: **33** 

Sealable: Yes

All DEUTSCH HDP20 Housings (324)

### Features

### Product Type Features

Connector Shape

Connector & Housing Type

Circular

Housing for Male Terminals

Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Contact Retainer
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Blank Cavity Position	0
Connector Seal Code	N Seal
Number of Positions	33
Electrical Characteristics	
Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black

Housing for Male Terminals, Wire-to-Wire, 33 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



### **Contact Features**

Contact Size	Size 20
Contact Type	Pin
Mating Pin Diameter	1.02 mm[.04 in]
Contact Current Rating (Max)	7.5 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Add By Accessory
Mating Alignment Type	Guide Slot
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PAGF
Dimensions	
Connector Height	49.53 mm[1.95 in]
Product Width	49.53 mm[1.95 in]
Product Length	38.63 mm[1.521 in]
Compatible Insulation Diameter Range	1.02 – 2.41 mm[.04 – .095 in]
Jsage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
ndustry Standards	
Degree of Protection	IP67
UL Flammability Rating	20mm Flame Test per Standard UL-94
Packaging Features	
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Housing for Male Terminals, Wire-to-Wire, 33 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

### **Compatible Parts**




Housing for Male Terminals, Wire-to-Wire, 33 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



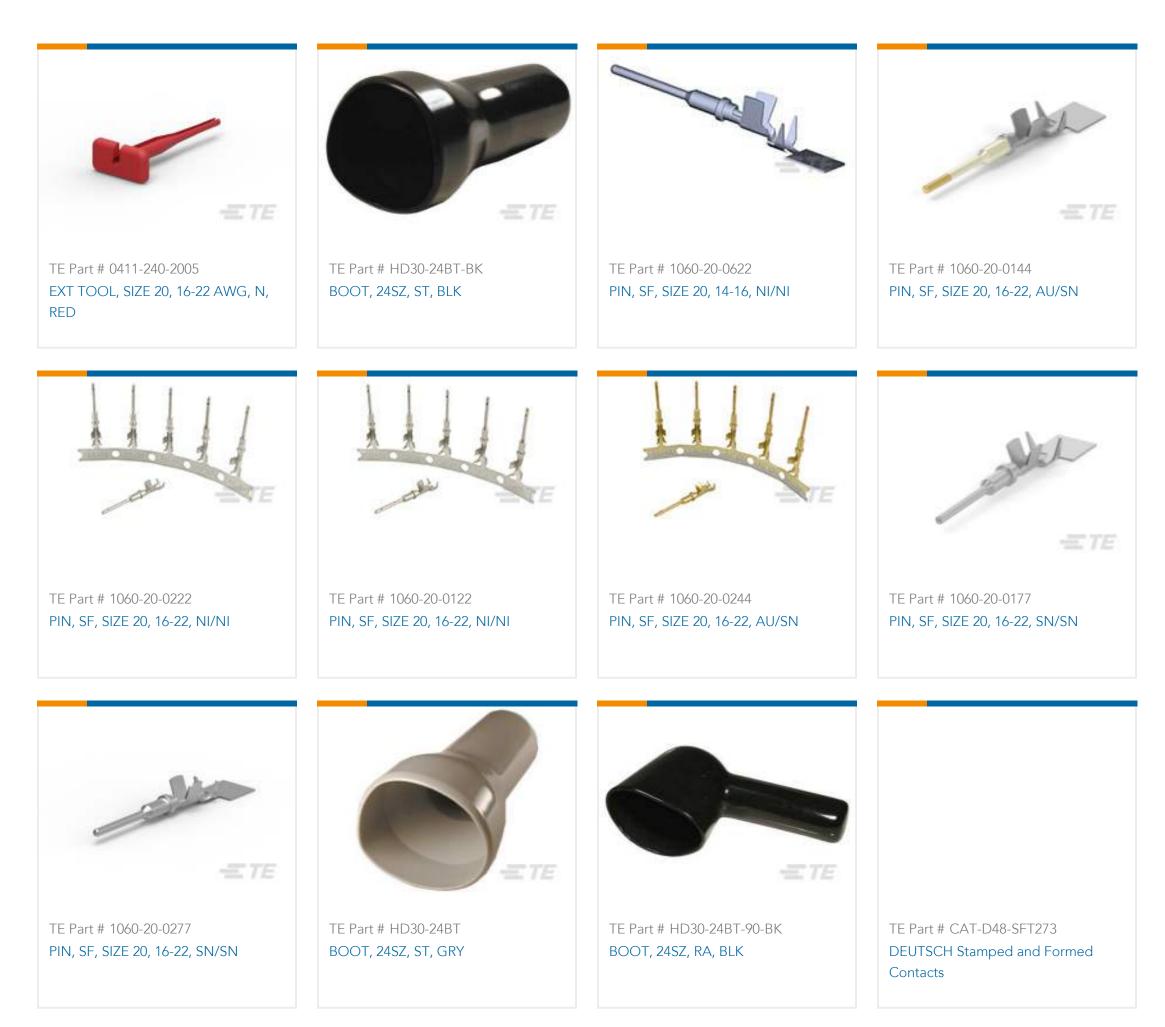


TE Part # MT-90BT-HT-24BK
BOOT, 24SZ, RA, HI TEMP, BLK

## Also in the Series | DEUTSCH HD

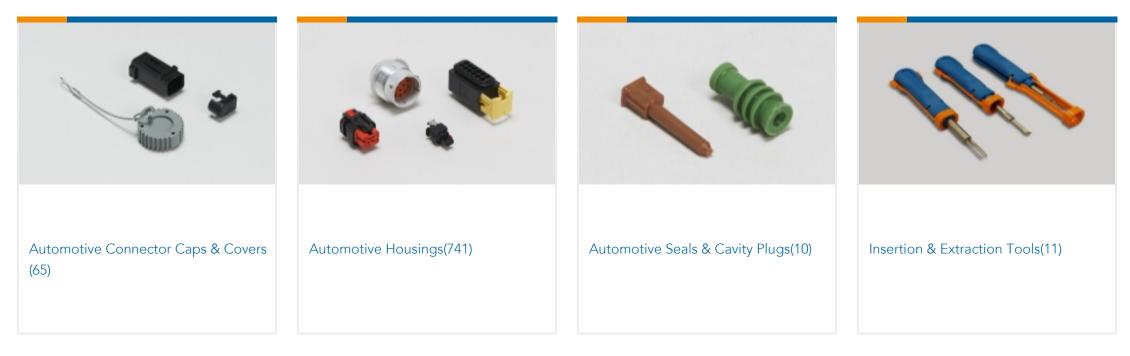


Housing for Male Terminals, Wire-to-Wire, 33 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



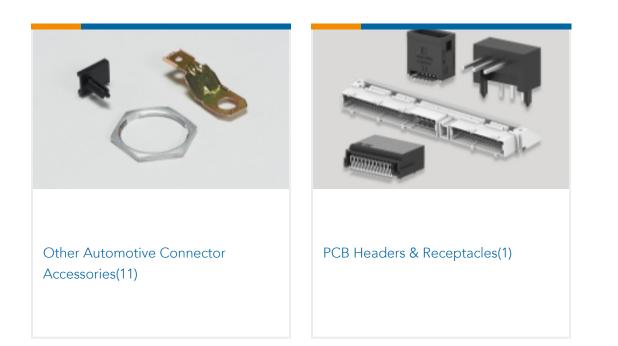

## Also in the Series DEUTSCH HDP

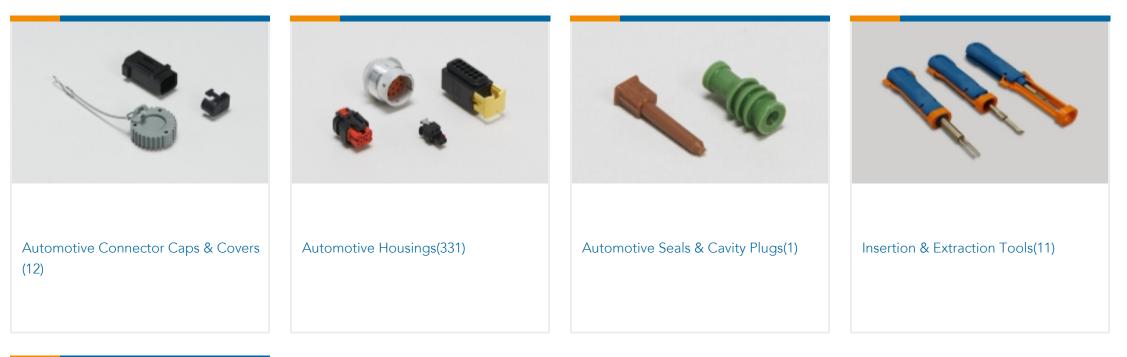



Other Automotive Connector Accessories(5)

## Customers Also Bought



### Documents

Product Drawings PLG, 33P, BLK, N, 20, P

English

CAD Files 3D PDF

Housing for Male Terminals, Wire-to-Wire, 33 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



3D

Customer View Model ENG\_CVM\_CVM\_HDP26-24-33PN\_D.2d\_dxf.zip English Customer View Model ENG\_CVM\_CVM\_HDP26-24-33PN\_D.3d\_igs.zip English Customer View Model ENG\_CVM\_CVM\_HDP26-24-33PN\_D.3d\_stp.zip English

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

Product Specifications Application Specification

English

Agency Approvals UL Report

English