

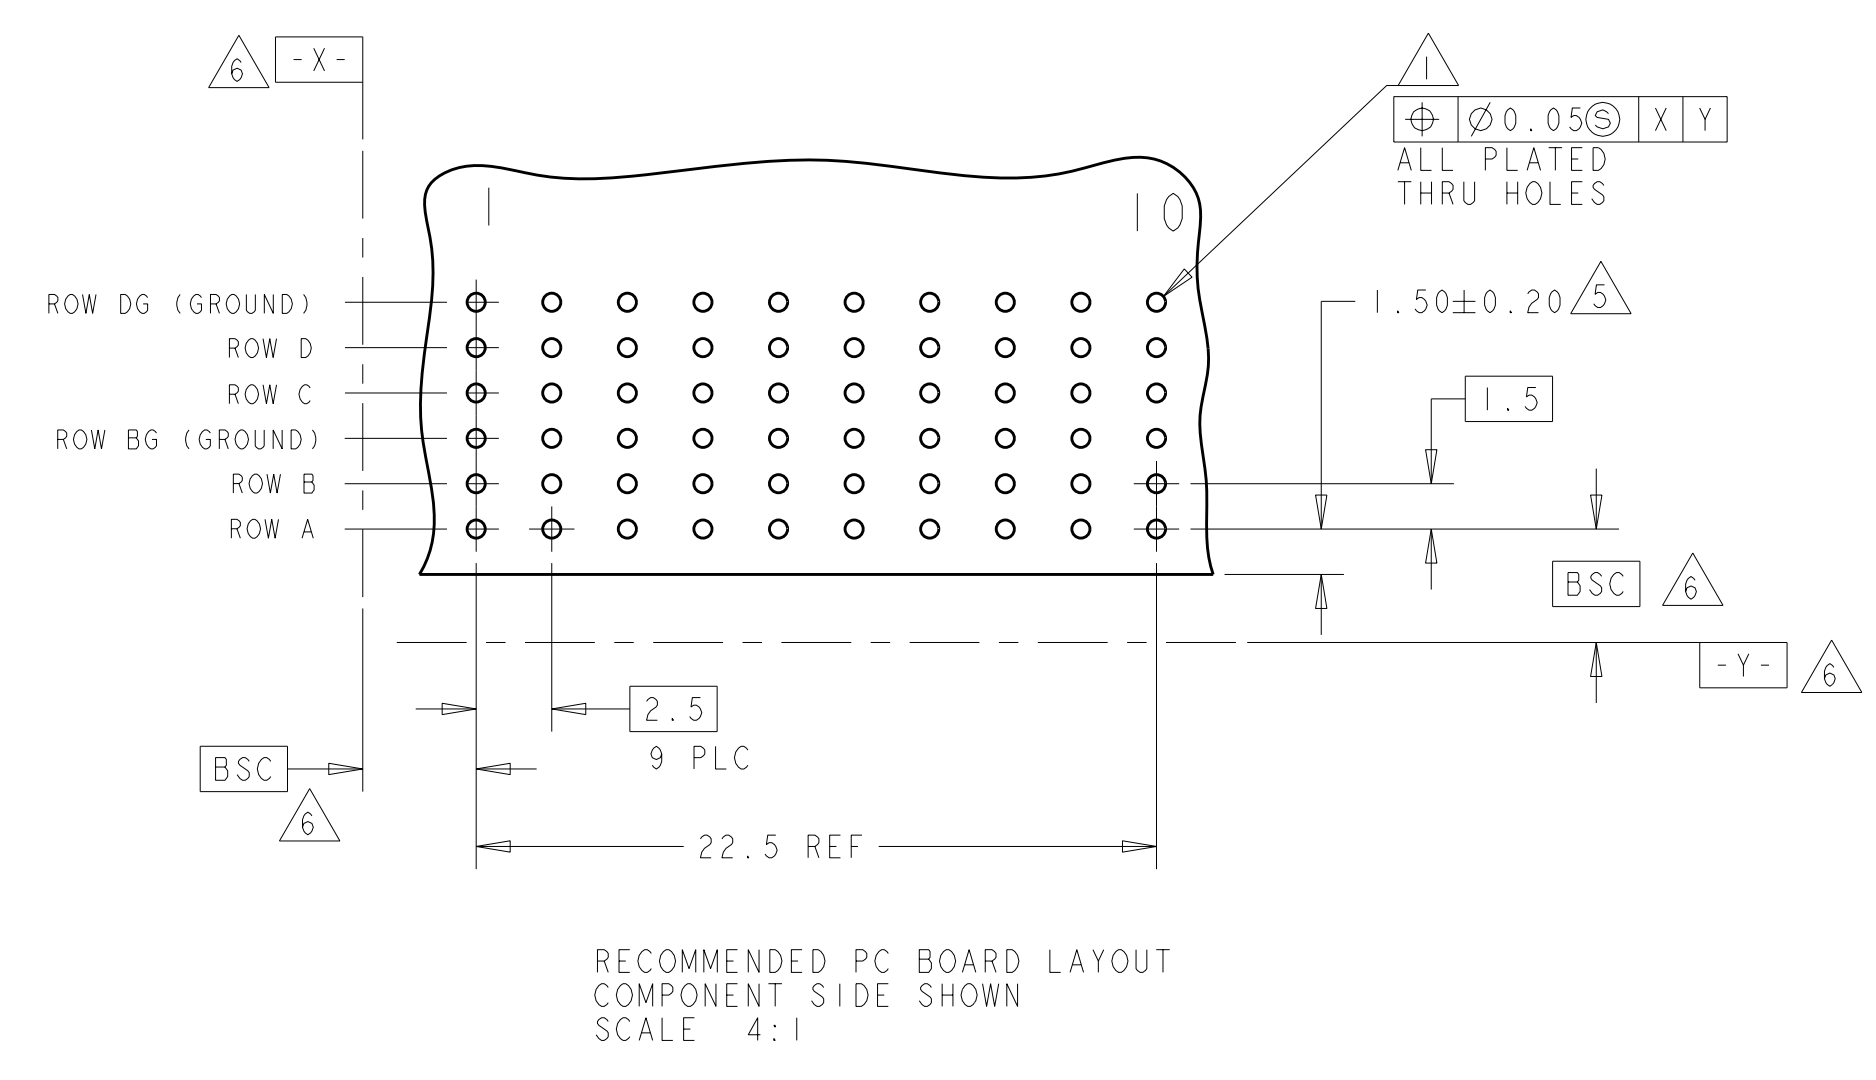


LOC	DIST	REV	DATE	BY	APPD
AD	00	0	24NOV2010	DH	NL
		01	11APR2011	DH	JE

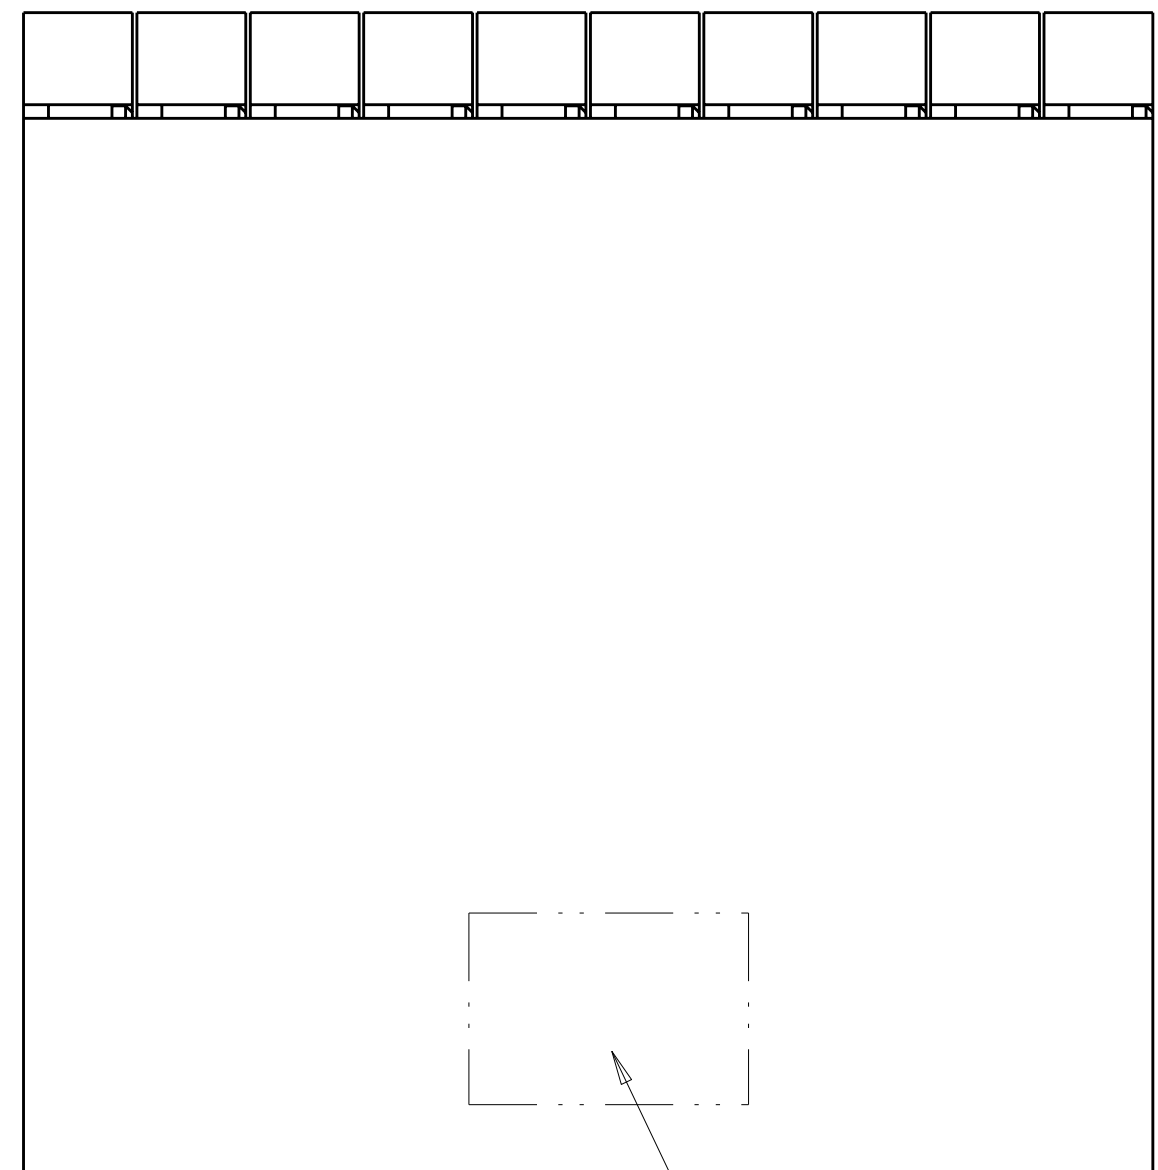


- 1 REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 2 MATERIAL:
CONTACT & SHIELD - PHOSPHOR BRONZE
HOUSING & CHICKLET - GLASS FILLED POLYESTER
- 3 FINISH:
CONTACT & SHIELD - 0.76µm MIN GOLD OVER
1.27µm MIN NICKEL IN MATING AREA, 0.5µm MIN TIN
OVER 1.27µm MIN NICKEL IN COMPLIANT PIN AREA.
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- 5 DIMENSION APPLIES TO CENTERLINE OF THRU HOLE
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

RECOMMENDED PCB BOARD LAYOUT
 COMPONENT SIDE SHOWN
 SCALE 4:1

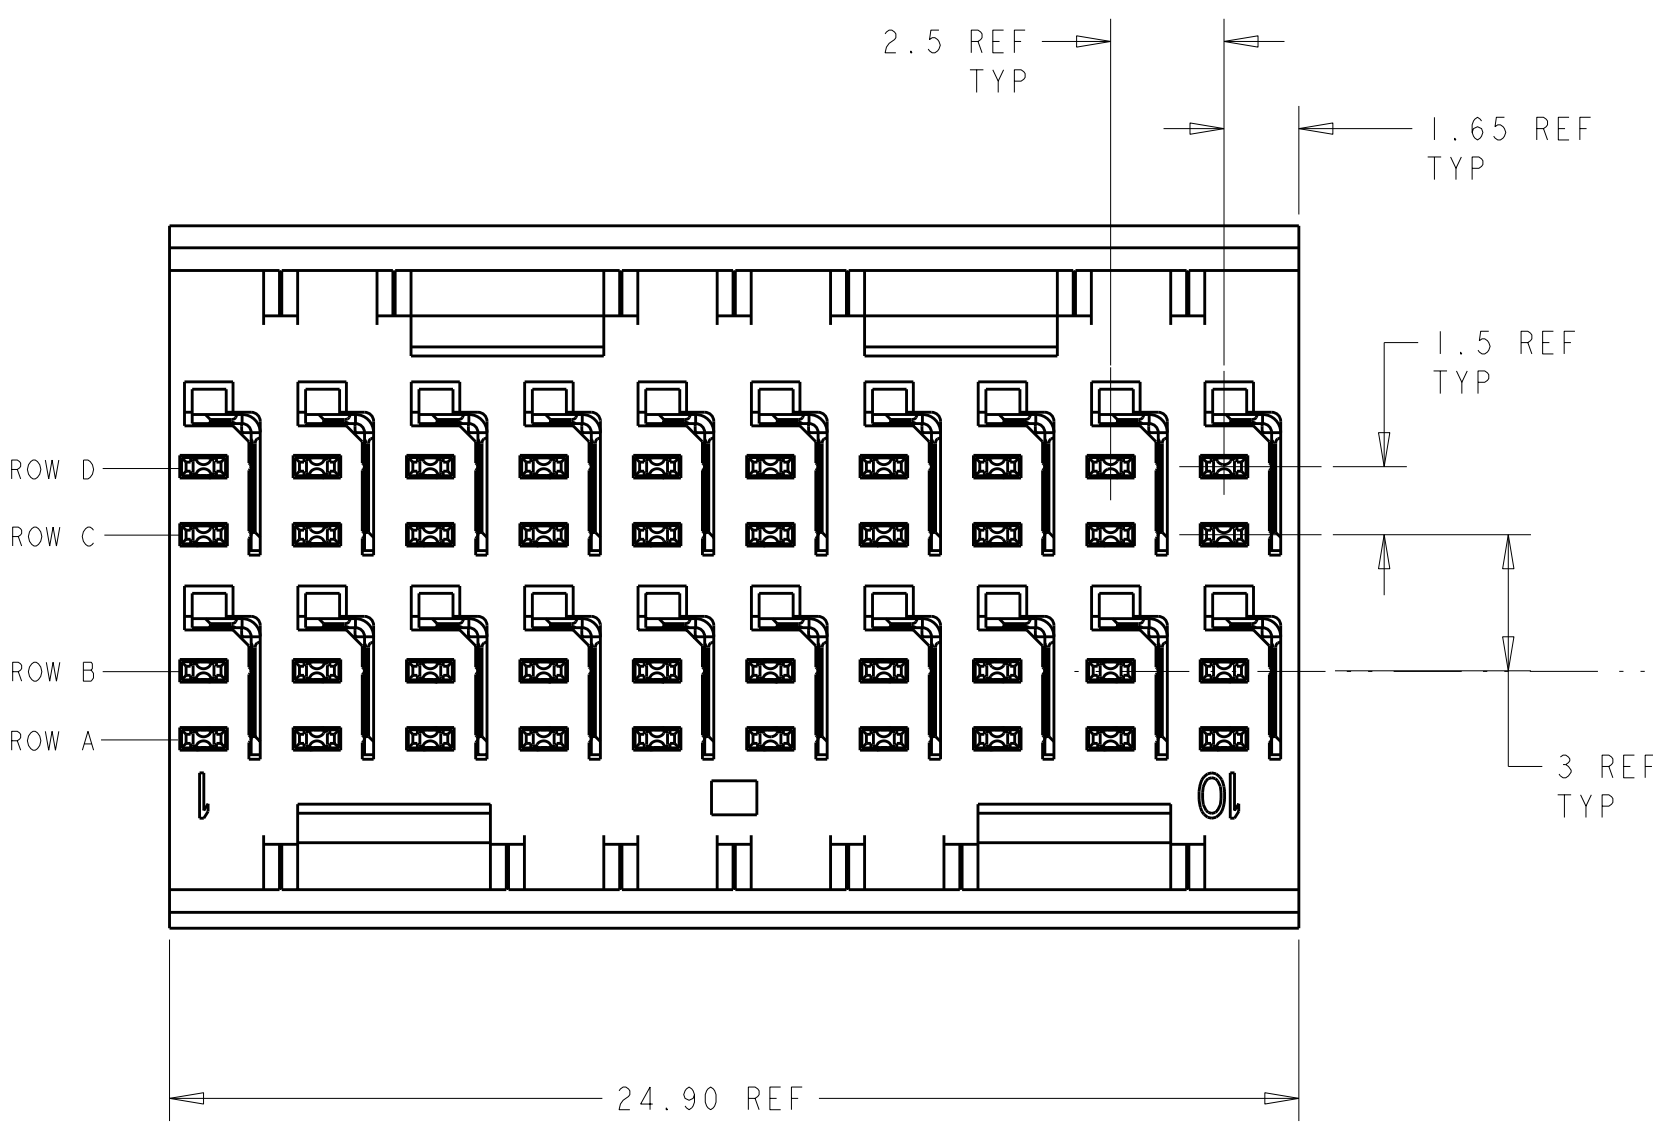

TOP SURFACE OF DAUGHTER CARD

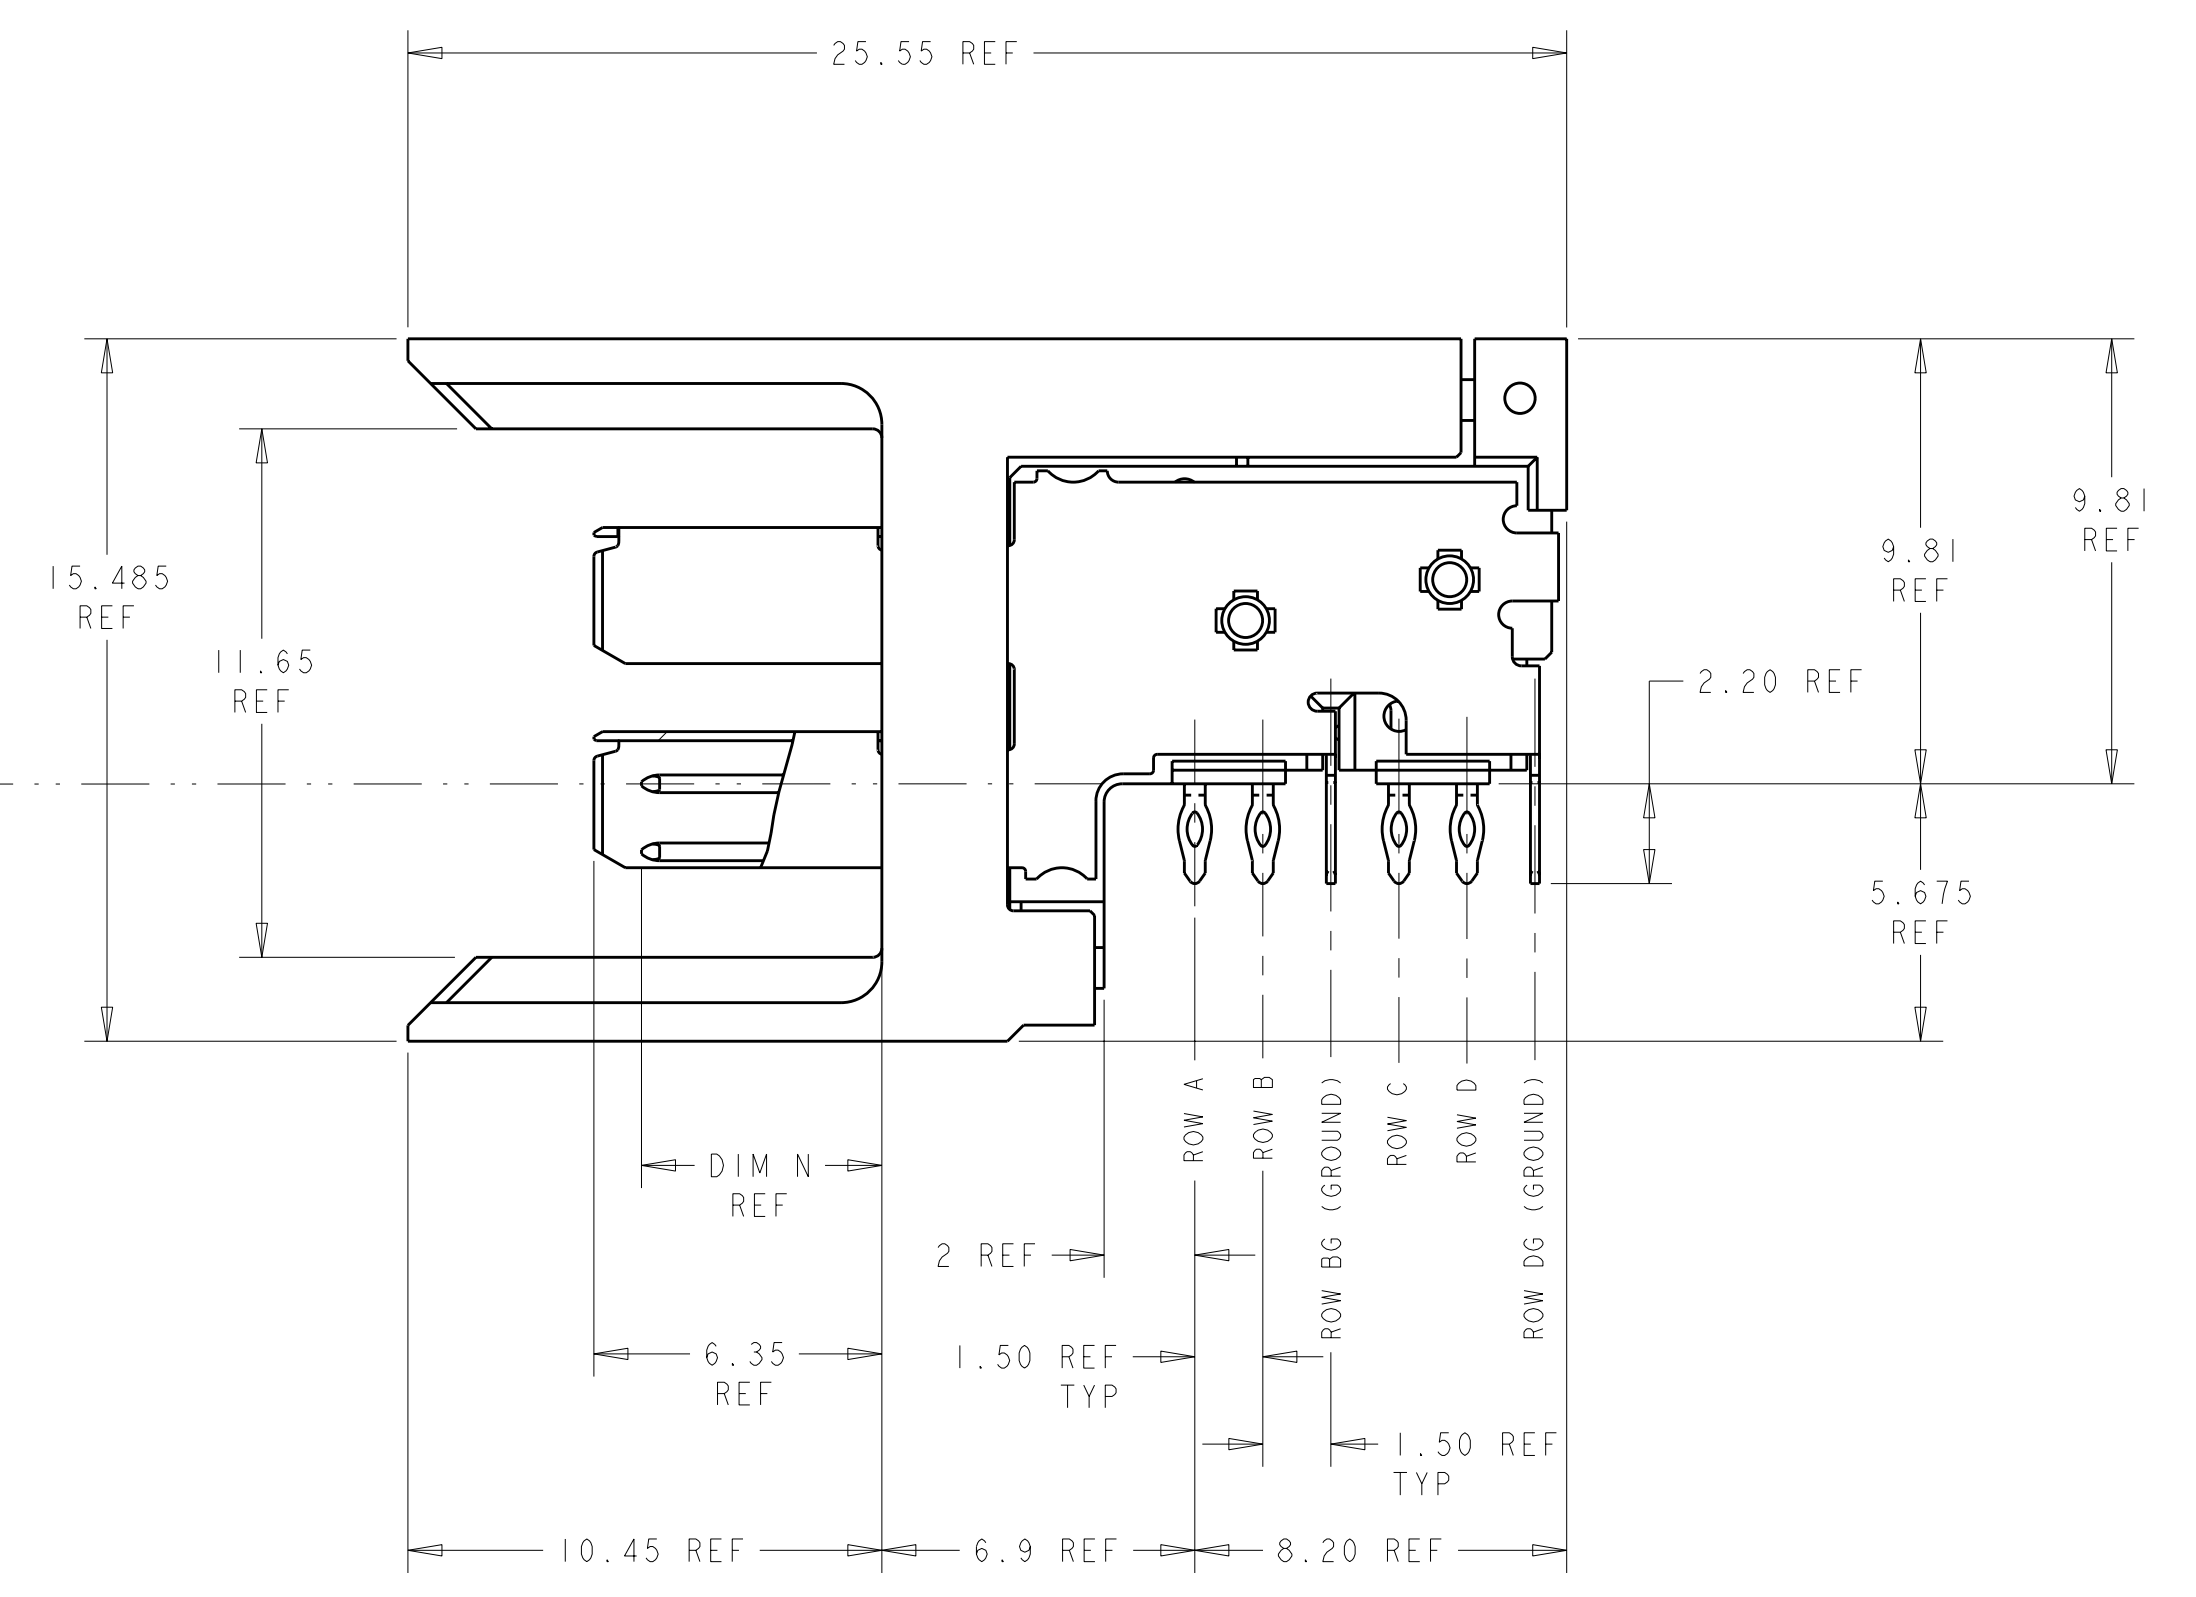

		CONTACT LAYOUT									
		A = 4.50mm (DIM N)									
		B = 5.30mm (DIM N)									
		G = GROUND									
ROWS	COLUMNS	1	2	3	4	5	6	7	8	9	10
	DG	G	G	G	G	G	G	G	G	G	G
D	B	B	B	B	B	B	B	B	B	B	B
C	A	B	B	B	B	B	B	B	B	B	B
BG	G	G	G	G	G	G	G	G	G	G	G
B	B	B	B	B	B	B	B	B	B	B	B
A	B	B	B	B	B	B	B	B	B	B	B

1645596-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. HUMBERT 24NOV2010	NAME STE
DIMENSIONS: mm		CHK N. LEHMAN 24NOV2010	TE Connectivity
TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ± 8 PLC ± 5 PLC ± 4 PLC ± ANGLES ±		APVD N. LEHMAN 29NOV2010	PRODUCT SPEC HEADER ASSEMBLY, SELECTIVELY LOADED, RIGHT ANGLE, 2 PAIR, COPLANAR, HMZd
MATERIAL		WEIGHT	RESTRICTED TO
FINISH		SCALE 6:1	SHEET 1 OF 1
CUSTOMER DRAWING		SIZE A1100779	DRAWING NO C=1645596