
DATE	REV	ECN	APP'D. BY
10/15/19	Α0	RELEASED	ADB
_	-	-	_



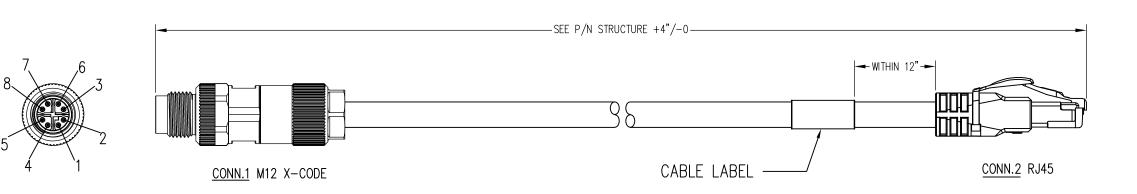

ט

## NOTES:

1. M12 CONNECTOR COMPONENTS: HOUSING: THERMOPLASTIC UL94 V-0

CONTACTS: COPPER ALLOY

SHELL: COPPER ALLOYS AND ZINC ALLOY

SEALING: NBR

CONTACT PLATING: UNDERPLATE: 50u"~70u" NICKEL

CONTACT AREA: 10u" GOLD

2

RJ45 CONNECTOR COMPONENTS: HOUSING: CLEAR POLYCARBONATE

CONTACTS: COPPER ALLOY STRAIN RELIEF OVERMOLD: PVC SHIELD: NICKEL PLATED BRASS

CONTACT PLATING: UNDERPLATE: 100u" NICKEL PLATING: 2u" GOLD FLASH CONTACT AREA: 50u" GOLD


CABLE CONSTRUCTION: STRANDED, TIN PLATED COPPER 4PR, SF/UTP, TYPE CMX

TPE JACKET

2. ELECTRICAL TESTING: 100% TRANSMISSION TESTED FOR PERFORMANCE

3. PACKAGING: ONE CABLE PER BAG


## PIN ASSIGNMENT

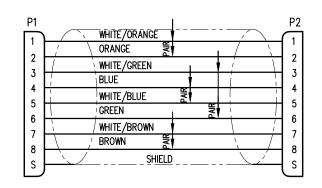



## 568B STANDARD WIRING MAP

Part Numbers Reference Table		
LENGTH	Part Number	
3 FT	BM-MYRM003F	
7 FT	BM-MYRM007F	
15 FT	BM-MYRM015F	
30 FT	BM-MYRM030F	

## P/N STRUCTURE:

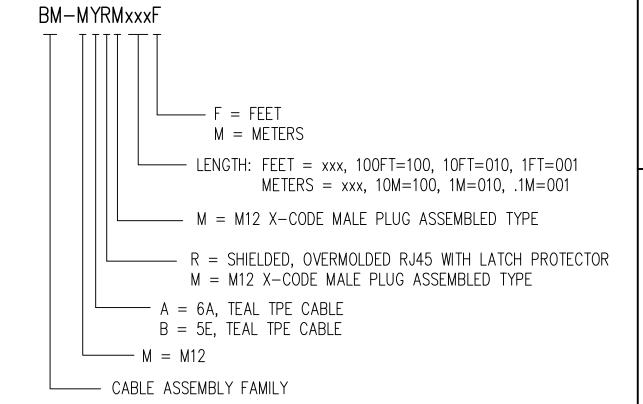





Jersey City, NJ 07302 +1 201 432 0463 http://www.belfuse.com

DO NOT SCALE DRAWING

DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1'

SHEET NO. 1 OF 1

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED. OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN

CONSENT OF BEL FUSE, INC.

M12 X-CODE MALE TO RJ45 MALE

DRN BY: JMM DATE 09/18/19
APPD BY: ADB DATE 10/15/19
DWG NO. CT999201 REV. AO

206 Van Vorst Street

2

AutoCAD

1

Α

5/ 9 VEG TANGO