




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	SEP23/19	L.CHAN

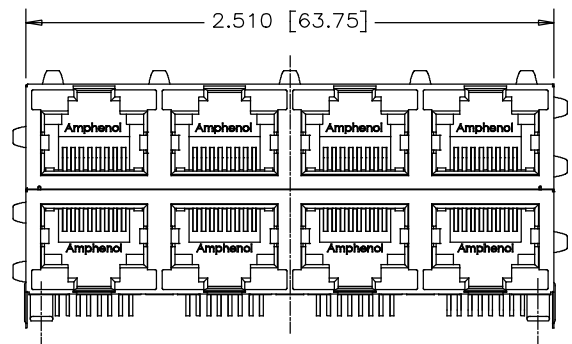


FRONT VIEW

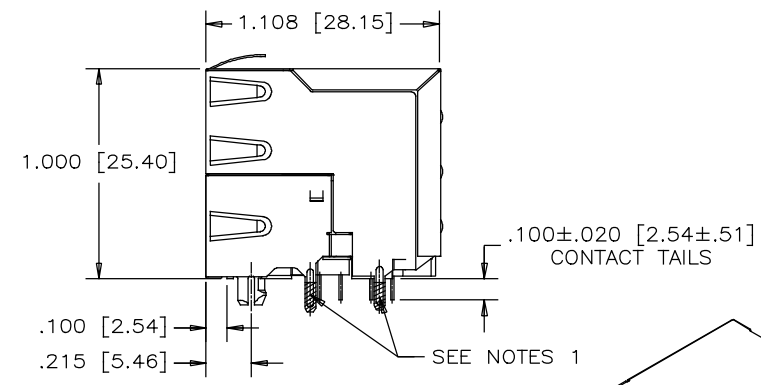

SIDE VIEW

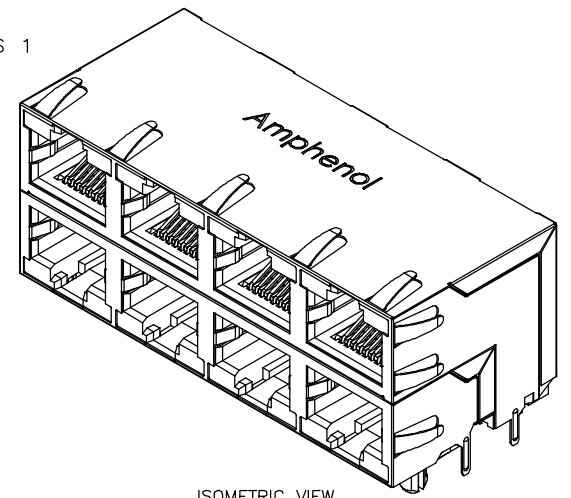

ISOMETRIC VIEW

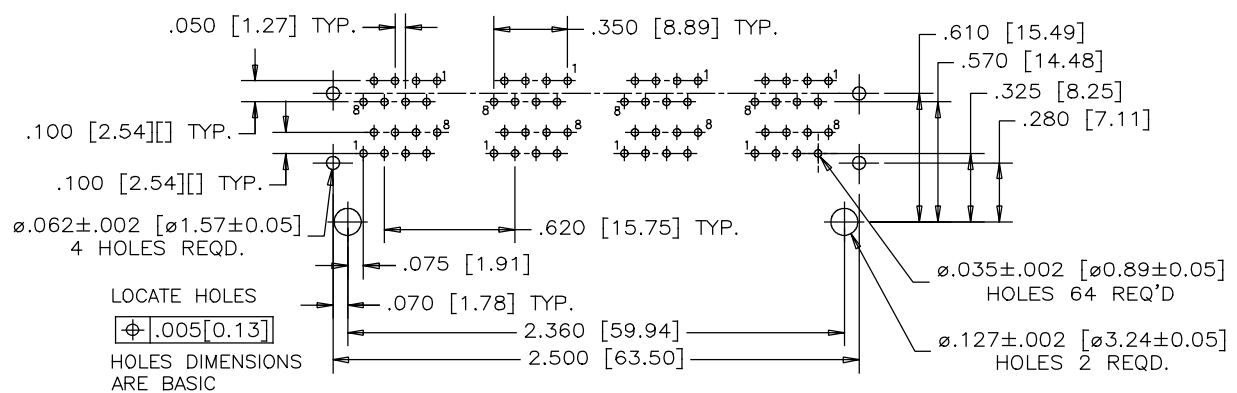

RECOMMENDED P.C.B LAYOUT
(COMPONENT SIDE OF BOARD)

NOTES:


1. MATERIALS:

- CONTACTS: PHOSPHOR BRONZE, SELECTIVE GOLD PLATING ON MATING SURFACES SEE PART NO. FOR THICKNESS. 50 MICROINCHES MIN. NICKEL OVERALL. 100 MICROINCHES MIN. MATTE TIN OR GOLD FLASH ON TAILS.
- HOUSING: ENGINEERING PLASTIC. FLAMMABILITY RATING UL 94V-0, BLACK
- SHIELD: COPPER ALLOY. PLATING: NICKEL WITH TIN FINISHED ON PCB TAILS.

2. RECOMMENDED SOLDERING TEMPERATURE:

WAVE SOLDERING PEAKED AT 260°C FOR 10 SEC MAXIMUM
AMPHENOL PART NO.: RJSAE-X380-08

- GOLD PLATING OPTION:
D=6u" GOLD PLATING
G=15u" GOLD PLATING
J=30u" GOLD PLATING
5=50u" GOLD PLATING

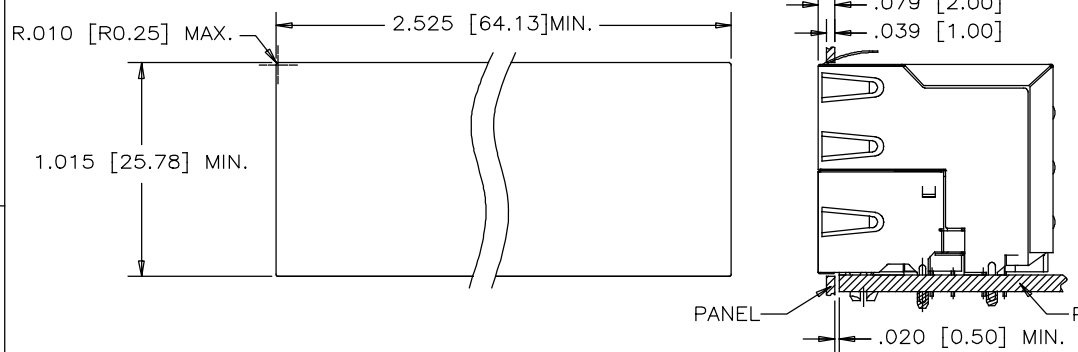

RECOMMENDED PANEL CUTOUT

UNLESS SPECIFIED OTHERWISE	DRAWN	RONNIE.C	OCT29/19
PRIMARY UNITS INCHES	CHECKED	KELVIN.T	OCT29/19
SECONDARY MILLIMETERS	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES	REF.		
3 DECIMAL PLACES ±.015			
ANGULAR DEGREES ±1.5°	THIRD ANGLE PROJECTION		
	DO NOT SCALE DRAWING		

Amphenol Canada Corp. Commercial Products	
STACKABLE MULTI-PORT MODULAR JACK, 8 POS. 8 CONTACTS, WITHOUT LED, SHIELDED, .100INCH CONTACT TAILS -RoHS COMPLIANT	
DWG NO. P-RJSAE-X380-08	REV A
CODE ID NO. 03554	DWG SIZE X SCALE N/A SHEET 1 OF 1