
	D D	п	<u>п</u>	0





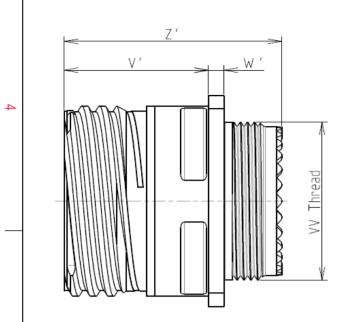

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65°C to +175°C
-Salt Spray	: 2000 hours

: 11.6 g ± 10%

8D 0

G

11

J

22

S

F

D

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		


ORIENTATION : D

CONTACT LAYOUT : 11-22

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

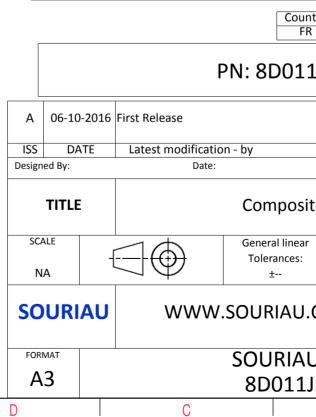

	σ		A		
		I			
					4
	6/ 3	a na			
	A A A A A A A A A A A A A A A A A A A	7			
	-	0			
	1				
	1 10	-0			
S EXA	AMPLE				3
· any i	non-conformit	ty or damage			
s whic	ch does not co he Parties or b	mply with	tv		
	on, technical n		- 1		
untry	Jurisd	liction & Cont	rol List		
R		Not Listed			2
.1J2	22SD				
					-
				MOD N°	-
		CUSTOME	R DRAWING		
site	Receptacl	e 8D seri	es		
ar		NPRDS /	PROJECT		
			59	and a f	1
J.CC	COM it must not be reproduced or				
	it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
LJ22	2SD-C		•	1/2	J
	В		A		

		Contact Layout						Panel Cuto
4	(22*				501 22	UARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	
	Ctc A B	4#22D 11-22 X Y 1.905 1.905 1.905				¥ (ØT
ى	C D	-1.905 -1.905 -1.905 1.905					۵ ۵ ۶	im ØA AA 81 ØT
	-						SOURIAU shall not b due to a use of th the Specifications issue (professional	e Products w ed by either
2							PN:	Coun FR 8D011
					A ISS Designe	DATE	First Release Latest modification - b Date:	у
_					SCAI NA			Composit eeneral linear Tolerances: ±
						URIAU		
		I	Γ					DURIAU 8D011J
	Н	G	F	l E	D		С	

Т

ш

т

G

0

