


FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

CATALOG LISTING

V3L-2226

CQ-X1507

SWITCH - BASIC

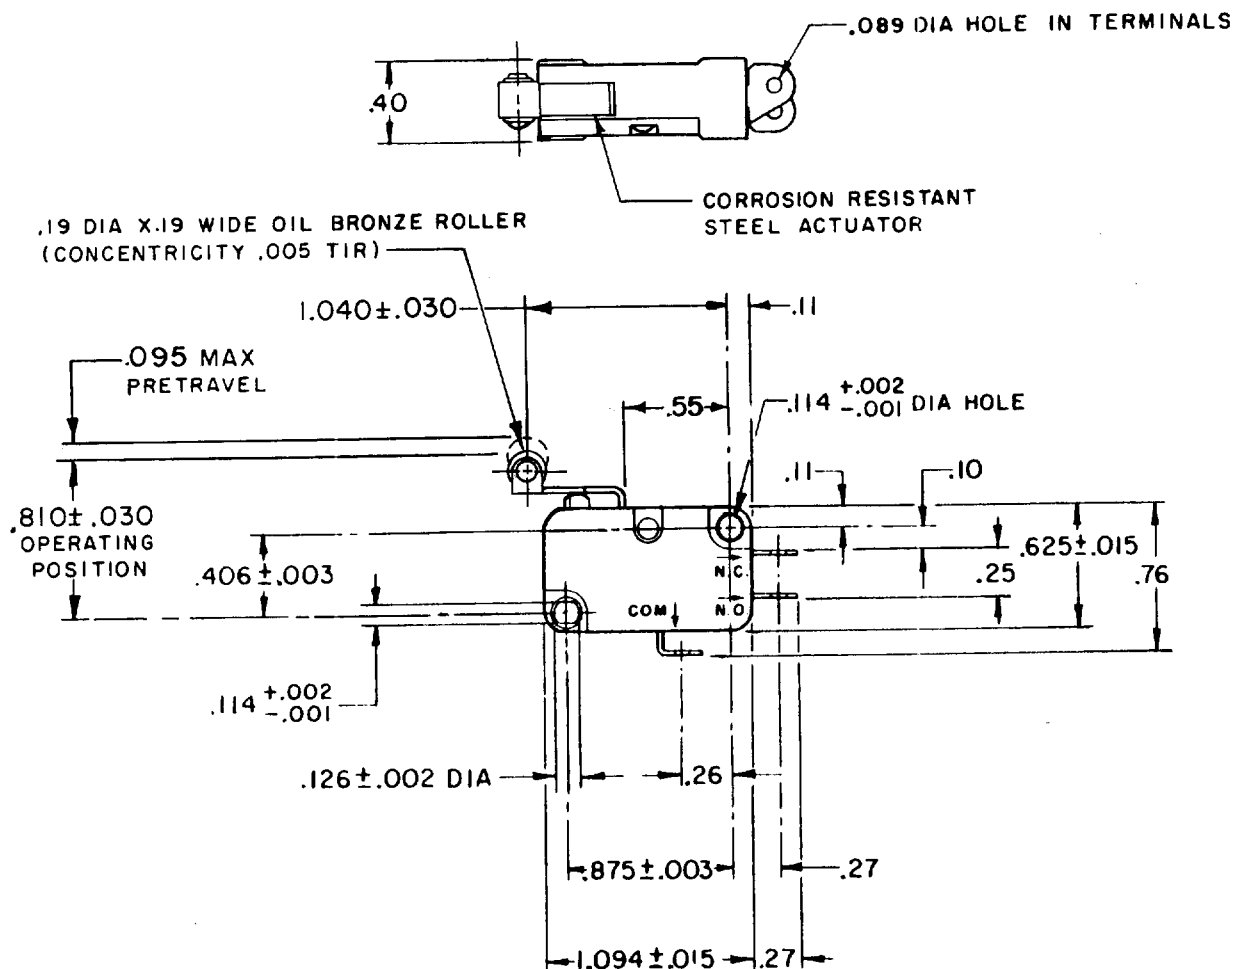


NOTE -

1 - TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



ELECTRICAL DATA

SCALE FULL

OPERATING FORCE--- 40 GRAM MAX

CONTACT ARRANGEMENT
S P D T

DO NOT SCALE PRINT

RELEASE FORCE - - - - - 2 GRAM MIN

L131 10A-1/4HP-125 OR 250 VAC
1/2A-125 VDC; 1/4A-250 VDC
3A-125 VAC "L"

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE $\pm$

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X,X	0.4/.016	X,X	0.8/.03
TWO PLACES	X,XX	0.15/.006	X,XX	0.38/.015
THREE PLACES			X,XXX	0.13/.005
ANGLES				

DESIGN UNITS ☐ SI METRIC ☐

US CUSTOMARY
☒

WEIGHT

V3L-2226



DRAWING
NUMBER

8

3

REPLACES X68576-V3L

RELEASE NO. PR-7488

CHECK

CHECK

78

NON

2	
---	--

ל

HECK

78

OCT

3

FO-52848-A