

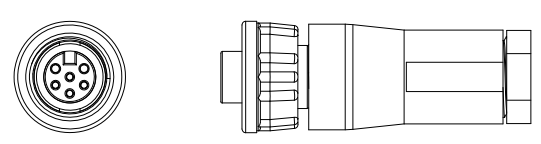


REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Victory	2020/04/09

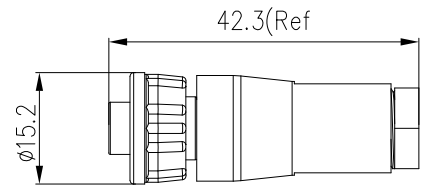

21XXX211-01
Pin Number

7 Pin	8 Pin
P/N: 21007211-01	P/N: 21008211-01
5 Pin	6 Pin
P/N: 21005211-01	P/N: 21006211-01
Pin Assignments Front View	

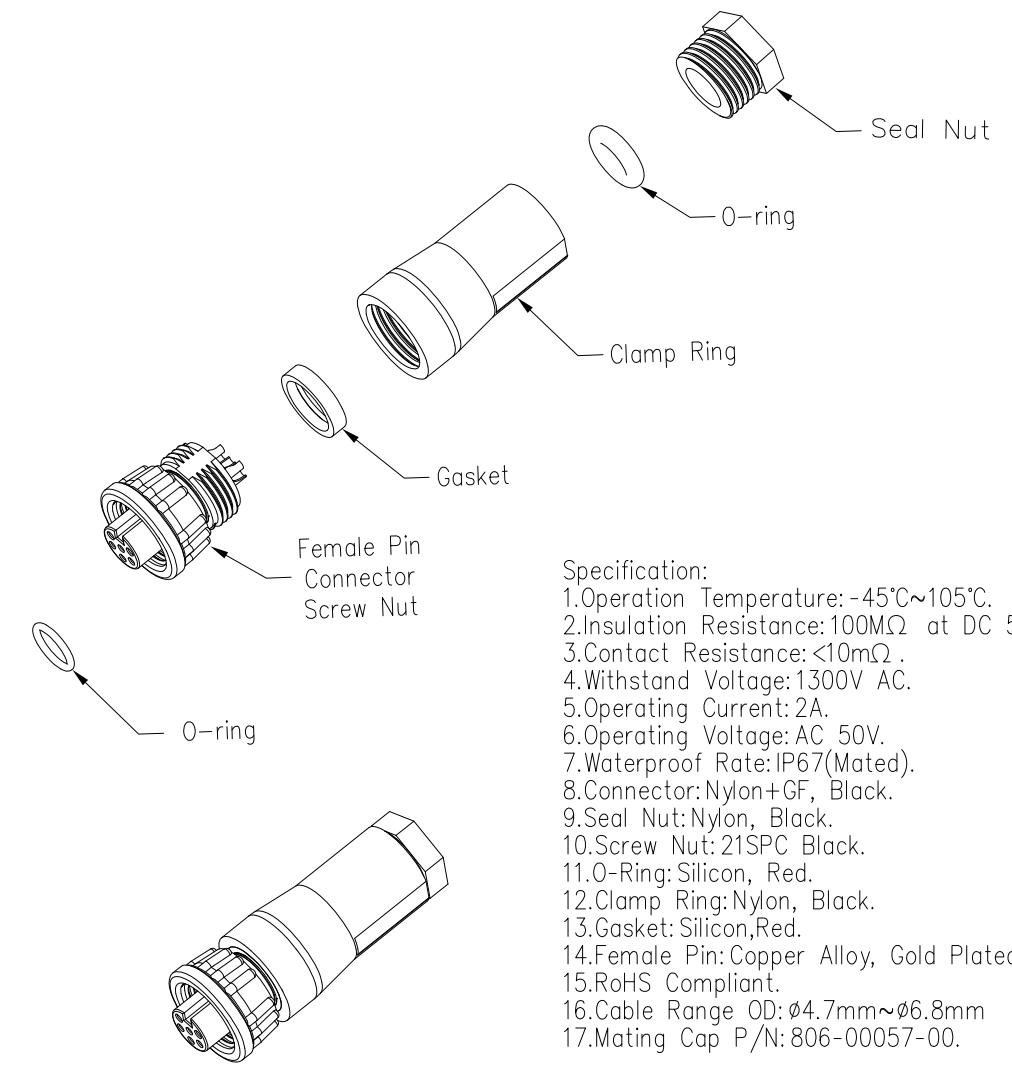

- Specification:
- 1.Operation Temperature: -45°C~105°C.
 - 2.Insulation Resistance:100MΩ at DC 500V.
 - 3.Contact Resistance:<10mΩ .
 - 4.Withstand Voltage:1300V AC.
 - 5.Operating Current:2A.
 - 6.Operating Voltage:AC 50V.
 - 7.Waterproof Rate:IP67(Mated).
 - 8.Connector:Nylon+GF, Black.
 - 9.Seal Nut:Nylon, Black.
 - 10.Screw Nut: 21SPC Black.
 - 11.O-Ring:Silicon, Red.
 - 12.Clamp Ring:Nylon, Black.
 - 13.Gasket:Silicon,Red.
 - 14.Female Pin:Copper Alloy, Gold Plated.
 - 15.RoHS Compliant.
 - 16.Cable Range OD:φ4.7mm~φ6.8mm
 - 17.Mating Cap P/N:806-00057-00.

UNIT:mm		DESCRIPTION Mini Series Screw Type Male Plug With Female Pin
TOLERANCE .X ±0.25 .XX ±0.15 .XXX ±0.05 ANGLES ±1°	SCALE: 1:1	SHEET 1 OF 1
REV. C1	SIZE A4	*:Inspection Item

CHOGORI[®]

PART NO	21XXX211-01	DRAWN BY	Victory	DATE	2020/04/09
DWG NO		CHECKED BY	Ivan	DATE	2020/04/09
CUSTOMER		APPROVED BY	Panson	DATE	2020/04/09

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.