

PRODUCT NO.
 10023290-025 — OBSOLETE
 10023290-025LF

NOTES:

- ① MOLDING MATERIAL—MODIFIED POLYPHENYLENE ETHER, COLOR: BLACK, MEETING UL-94V-0.
2. PIN LENGTH TO BE .210[5.33] MIN. RECOMMENDED PIN LENGTH IS .225±.015 [5.72 ±.38]
- ③ TO LATCH TERMINAL—PUSH AS SHOWN IN FIGURE #1, BE SURE THAT LATCH SNAPS DOWN.
- ④ TO REMOVE TERMINAL—PUSH TERMINAL FORWARD. LIFT LATCH WITH HANDTOOL AS SHOWN IN FIG.#2 & 3. DAMAGE TO LATCH CAN OCCUR IF LIFTED MORE THAN 25° ANGLE TO TOP OF HOUSING.
5. SEE MINI PV™ TERMINAL TA-75 FOR CORRECT CRIMP HEIGHT FOR EACH DIFFERENT WIRE SIZE. IF THIS SPECIFICATION IS NOT MET LATCHING WILL NOT BE SATISFACTORY. PRODUCT SPECIFICATION: BUS-12-067.
6. THIS HOUSING IS INTENDED FOR USE WITH FCI ELECTRONICS MINI PV™ TERMINAL AND FCI C.T.W. MALE PIN WITH 22-26 A.W.G. WIRE.
- ⑦ MOLDING IS PRIMARY MANUFACTURING METHOD, SOLVENT BONDING IS OPTIONAL.
- ⑧ ARROW MARKED ON HOUSING INDICATES POSITION #1.
9. PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
10. THIS PRODUCT IS NOT INTENDED TO BE EXPOSED TO MANUFACTURING SOLDER PROCESSES.

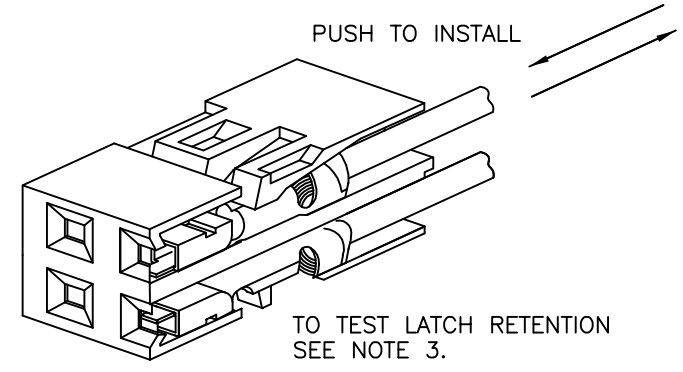
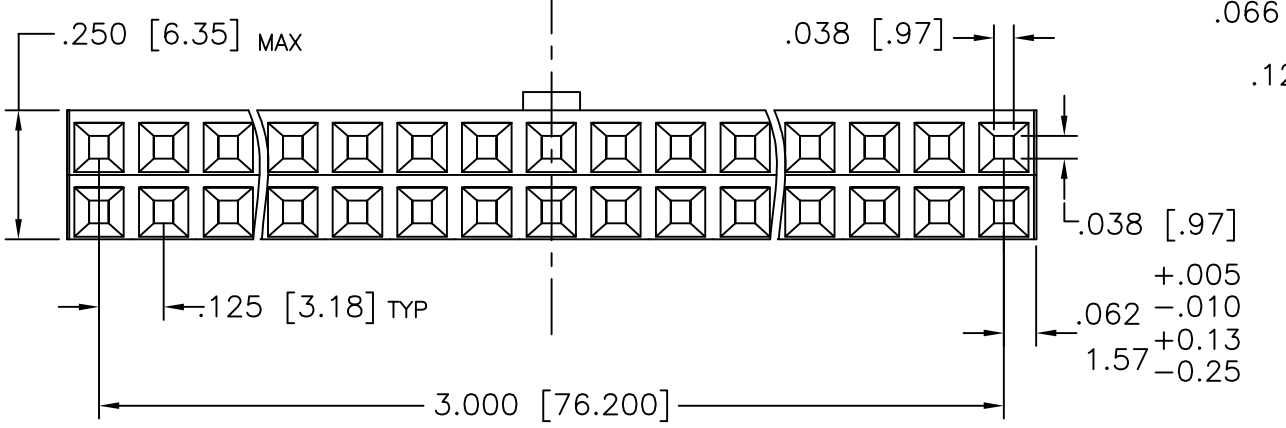
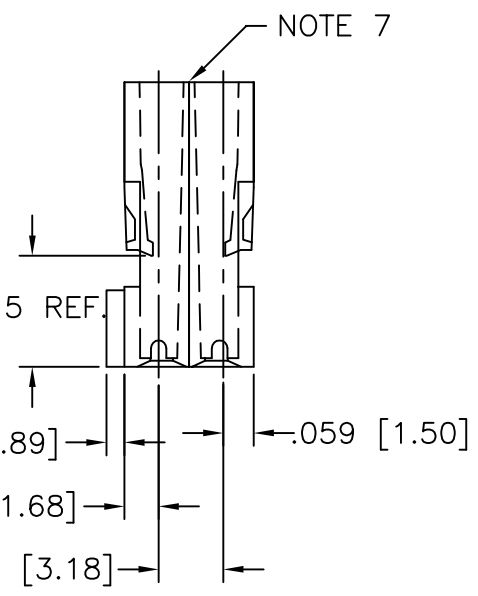
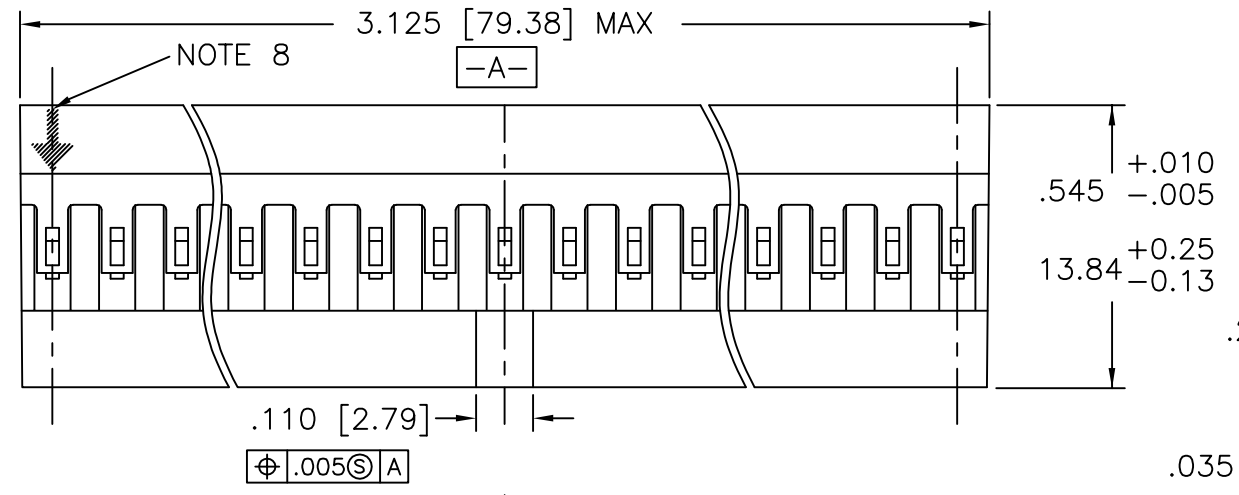


FIG 1

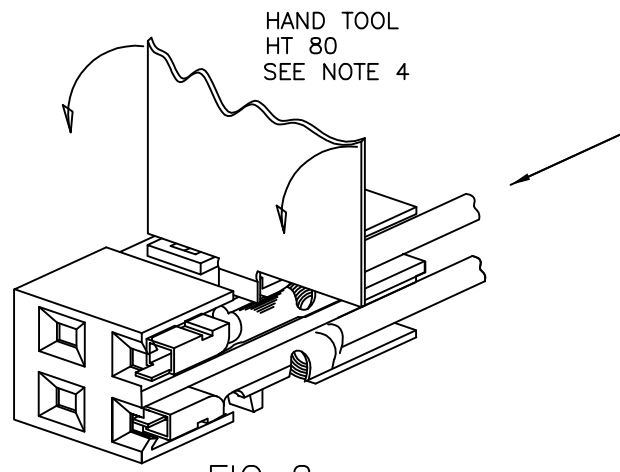


FIG 2

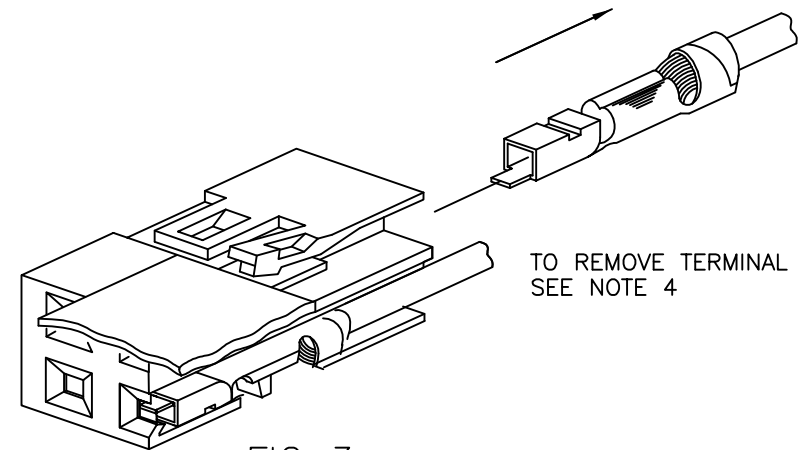


FIG 3

TO TEST LATCH RETENTION
SEE NOTE 3.

TO REMOVE TERMINAL
SEE NOTE 4

mat'l. code SEE NOTE 1				surface ✓	tolerance	projection	product family PV HOUSINGS			
ltr	ecn no	dr	date	tolerances unless otherwise specified	angles	linear	INCH/MM	title		
A	V03-0376	HTB	2003-04-02			.XX±.01/.X±.3		MINI LATCH HOUSING W/KEY		
B	V03-0453	HTB	2003-04-22			.XXX±.005/.XX±.13		.125 [3.18] X .125 [3.18]		
C	V03-1363	PJ	2004-02-21	10°±2'		.XXXX±.0020/.XXX±.0013	scale 2:1	dwg no		
D	V05-0718	TAB	2005-07-20	dr	L. POTTEIGER	2003-03-20		sheet 1 of 1 size		
E	V06-0407	HTB	2006-04-20	engr	H. SUNDY	2003-03-20		10023290 A3		
F	V07-0534	HTB	2007-08-22	chr	H. SUNDY	2003-03-20		type Product Customer Drawing		
sheet index		revision	F							
		sheet	1							



Copyright FCI