



- Specifications:
1. Insulation Resistance: 100M Ohms min. (Initial)
  2. Contact Resistance (Initial): 30m Ohm max at 100mA(max) 1KHz.
  3. Dielectric Withstand Voltage: AC 250V, 50 to 60Hz for 1 minute.
  4. Endurance: 5,000 Cycles 10 ~ 20 cycles per minute.
  5. Rated Voltage: 4.20 Volts DC
  6. Rated Current: 2.0 Amps DC
  7. Operating Temp: -25 to +85 deg. C.



Unless Otherwise Specified:  
Dimensions Tolerance on Decimals ±0.3

No.	Description	Material	Finish	Qty	Note
1	Shield	SPCC	Nickel	1	40T
2	Center Pin	PBW	Silver	1	Ø0.65
3	Shunt Terminal	Brass	Silver	1	40T
4	Spring Contact	Ti-Cu Alloy	Silver	1	30T
5	Plastic Housing	Polyamide	Black Color	1	UL94V-0

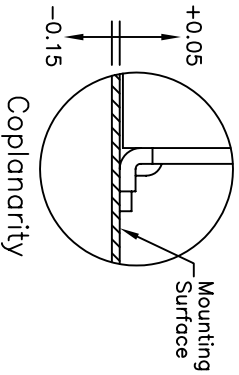

**CUI INC**

9615 SW Allen, Suite 103  
Beaverton, OR 97005  
Phone: (503) 643-4899  
800-275-4899  
Fax: (503) 372-1266  
Website: www.cui.com

Note: ±0.20 for PCB Layout

PCB Layout  
(Top View)