

U | Contact

Data sheet


PC board jack M12, A-coded, 4-pole, IP67, rear mounting, in individual parts

Page 1/4

P/N MMT371A715-0001

EAN 4251394632254

2023/07/04 Version: J

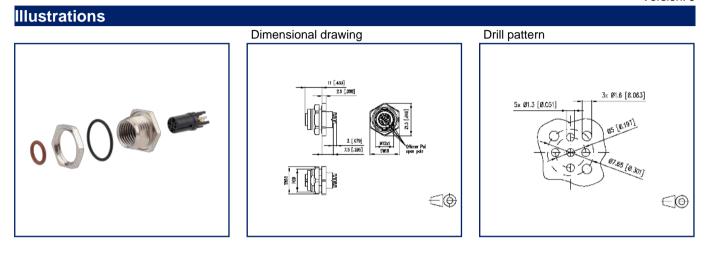

See enlarged drawings at the end of document

Product specification

- PC board jack M12
- rear mounting
- 4-pole, A-coded according to IEC 61076-2-101
- THR solderable
- Top entry
- Contact carriers black
- IP67 when plugged in
- in individual parts
- · suitable for applications in the railway industry according to data sheet





U Contact

Data sheet PC board jack M12, A-coded, 4-pole, IP67, rear mounting, in individual parts

P/N

Page 2/4

MMT371A715-0001

EAN 4251394632254

2023/07/04 Version: J

Technical Data

| General Data | |
|------------------------------------|------------------------------------|
| Dimensions | |
| Dimension (D x H) | Ø 21.5 mm x 20.5 mm |
| Dimension (D x H) | 0.846 in. x 0.807 in. |
| Ports | Single port |
| Solderability | Acc. to IPC/JEDEC J-STD-020E-MSL 1 |
| Coding | A-coded |
| Electrical characteristics | |
| Rated voltage | 250 V |
| Current carrying capacity at 40 °C | 4 A |
| Insulation resistance | min. 100 MOhm |
| Overvoltage category | II |
| Degree of pollution | 2 |
| Mechanical data | |
| Material | |
| Material - Housing | CuZnPb |
| Material - Contact | CuZnPb |
| Contact surface | Ni + Au |
| Material - Insulating body | LCP UL94 V0 |
| Color | black |
| RoHS | compliant |
| Life - Number of mating cycles | >= 100 |
| Tightening torque - Plug | 0,6 - 1 Nm |
| Tightening torque - Jack mounting | 3 Nm +/- 0,5 Nm |
| Protection category | IP67 when plugged in |
| Climatic properties | |
| Temperature - Operating °C | -40 °C - 85 °C |
| Temperature - Operating °F | -40 °F - 185 °F |







CONNECT

We realize ideas

U | Contact

Data sheet PC board jack M12, A-coded, 4-pole, IP67, rear mounting, in individual parts

Page 3/4

P/N MMT371A715-0001

EAN 4251394632254

2023/07/04 Version: J

| Technical Data | |
|--|------------------------------|
| Approvals | |
| Approval mark UL | pending |
| Packaging | |
| Type of packaging | 10 pc(s) / blister packaging |
| Standards/Regulations | |
| Railway applications | |
| Electronic equipment used on rolling stock | following to DIN EN 50155 |
| Fire protection on railway vehicles | following to DIN EN 45545-2 |
| Classifications | |
| ETIM 7.0 | EC002637 |
| ETIM 8.0 | EC002637 |
| | |








We realize ideas

Page 4/4

P/N MMT371A715-0001

EAN 4251394632254

2023/07/04 Version: J

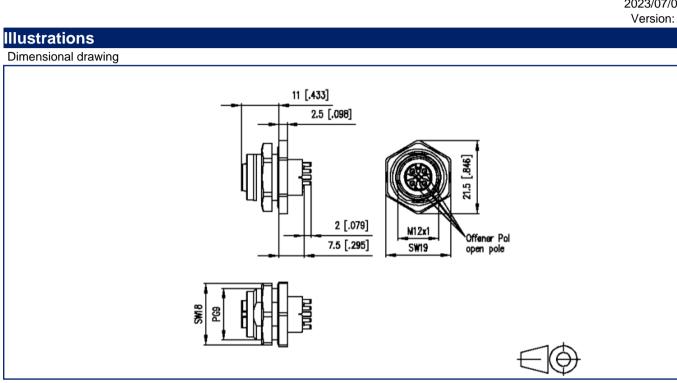

Drill pattern

U | Contact

PC board jack M12, A-coded, 4-pole, IP67,

rear mounting, in individual parts

Data sheet

