



Electrical specifications

Center Frequency: 2595 MHz
Bandwidth: 50 MHz
Input / Output Impedance: 50 Ohms
Passband: 2570-2620 MHz
Passband Insertion Loss: 3.0 dB Max
Passband Ripple: 0.5 dB max
Passband Return Loss: 14 dB min
Rejection: 40 dB min at 2467 MHz
Power Handling: 1 W

Mechanical


Mounting Method: SMT
Dimensions: 22.86 x 12.70 x 4.83 mm

Environmental

Operating Temperature: -40°C to +85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

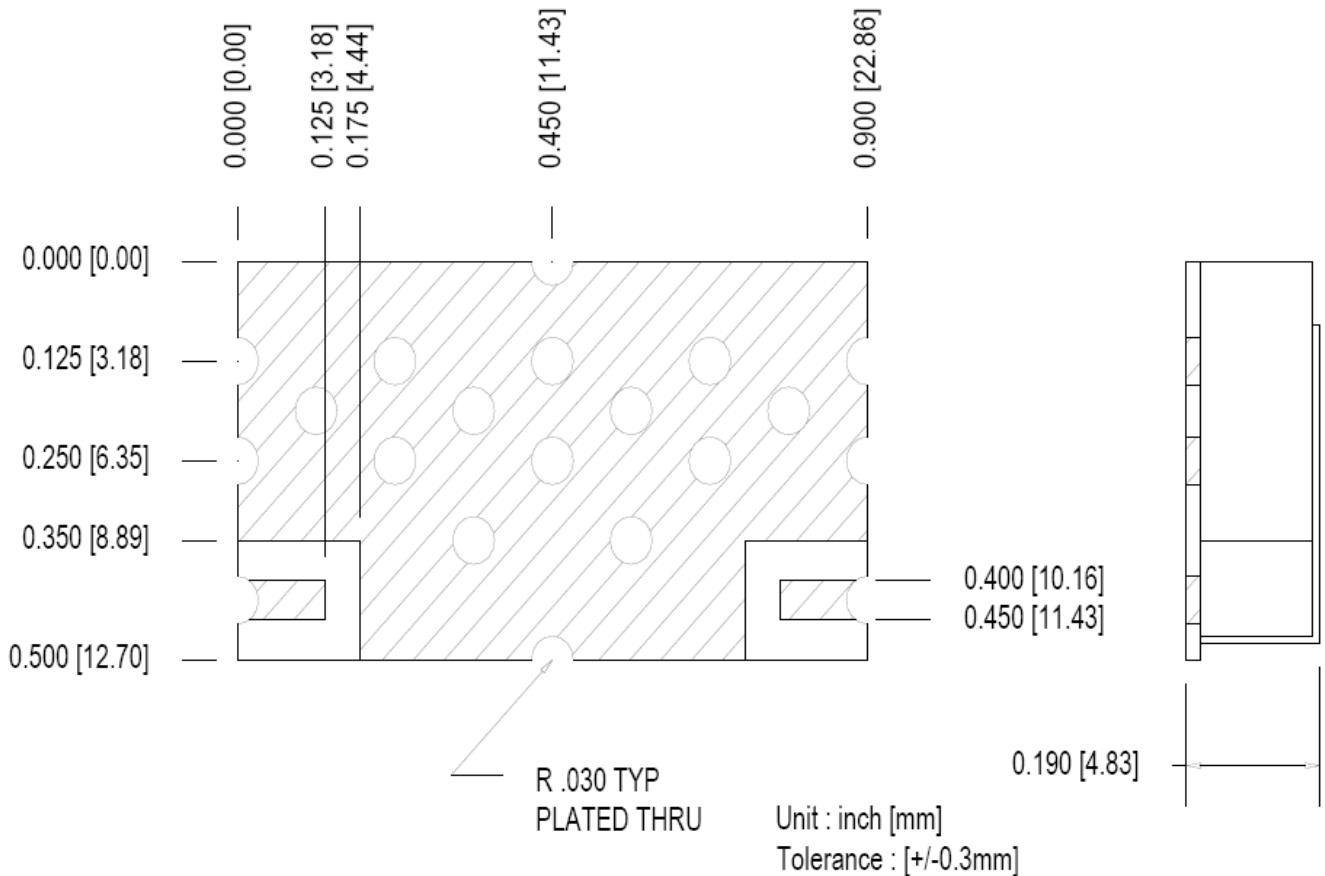



Response Plot:

