

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F


F

G

G

H

H

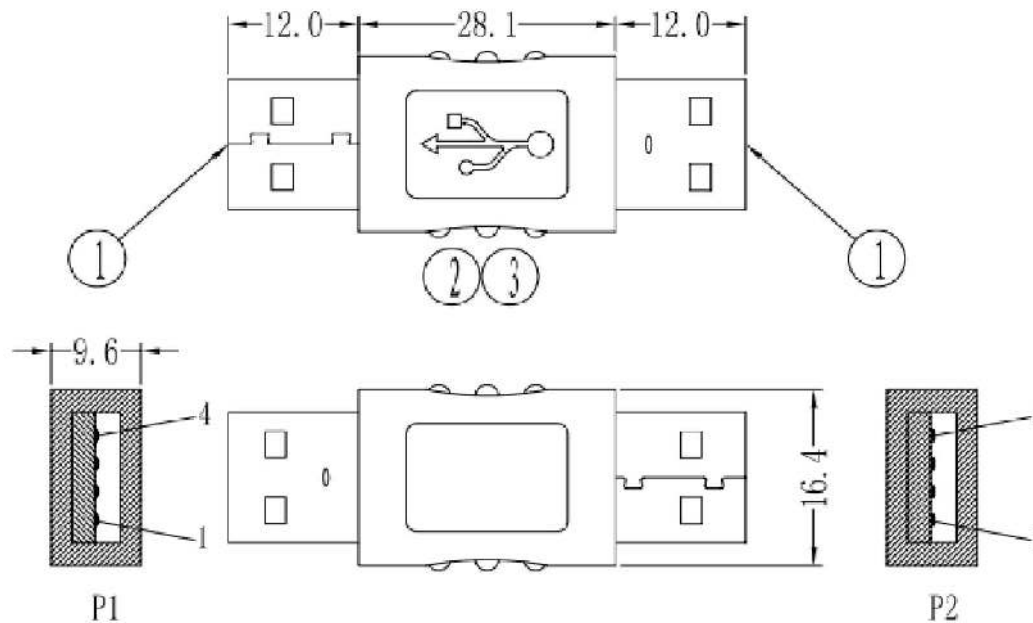

- ① **Electronic test:**
  - 1.100% test(open,short,miss wire)
  - 2.contact resistance:3 ohm max.
  - 3.insulation resistance:5M ohm min.
  - 4.Hi-pot: 300V DC/10ms
  - 5.Voltage rating: 30V
  - 5.Current rating: 1.5A
- ① **Mechanical:**
  - 1.Mating force: 3.57Kgf max
  - 2.Unmating force: 1.02Kgf min
  - 3.Operating temperature: -5°C~60°C

Packaging: PE bag

PIN ASSIGNMENT	
P1	P2
1	1
2	2
3	3
4	4
S	S

3	out jacket	BEIGE(IV-29) 45P PVC	6g
2	cable	UL1007 28AWG L=30MM	3
1	conn	USB A MALE,SHELL NICKEL MATERIAL STEEL, PIN GOLD MATERIAL BRASS, FLASH SHORT BODY INSULATOR COLOR:WHITE	2
NO	PART NO	DESCRIPTION	QTY

**RoHS compliant**  
Unit:: mm

Scale	FREE
TOLERANCE	
X.	±X
X.X	±X
X.XX	±X
DIM	TOL
ANGLE	±X°
Angle	TOL

①	Update	27.11.2019	Carson
②	Drawn	10.07.2015	Joanna
Id.	Modification	Date	Name

Drawn	10.07.2015	Joanna
Approved	27.11.2019	Carson
<b>ASSMANN</b> WSW components		

Customer-No.	
ASSMANN WSW-No. <b>A-USB-5</b>	
Drawing-No.	rev01
Replace	Sheet

1

2

3

4

5

6

7