

т	۵	п	m	0



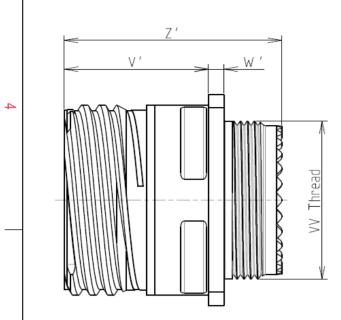



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

PLATING : J =

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite					
-Shell Plating	: Olive drab Cadmium					
-Insulator	: Thermoplastic					
-Contacts	: Copper Alloy					
-Seals & Grommet	: Silicon Elastomer					
-Contact Plating	: Gold over copper Alloy 0.8µm minimum					
-Durability	: 500 Mating cycles					
-Delivered with Souriau contacts and Accessories						
-Temperature Range	-65°C to +175°C					
-Salt Spray	: 2000 hours					

: 14.4 g ± 10%

8D 0

13


J

26

ΡE

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
PP	4.93±0.2				
R1	23.01				
R2	20.62				
S	28.6±0.3				
V'	19.5+1.4/-0				
W'	2.1/3.65				
Ζ'	32 Max				
VV THREAD	M18x1-6g				

		SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
		Count FR
		PN: 8D013
Α	14-10-2016	First Release

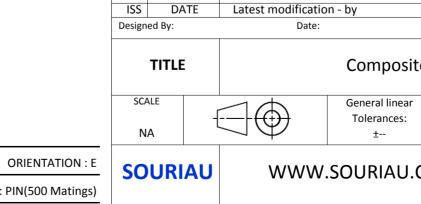

С

						V V
			CONTACT TYP	E : PIN(500 Matin		
Olive drab Ca	admium		CONT	ACT LAYOUT : 13-	26 FORMAT	
					A3	
	G	F	E		D	

	ω		:	Þ	
					4
YOUT SHOWN AS EXA	MPLE				3
not be liable for any r of the Products whic issued by either of the onal recommendatio Country FR PN: 8D013J2	h does not cor he Parties or b n, technical no Jurisdi	nply wit y a thiro otice.)	th d party Control List		2
n - by				MOD N°	
CUSTOMER DRAWING COmposite Receptacle 8D series General linear NPRDS / PROJECT Tolerances: 859					
.SOURIAU.COM					
SOURIAU [8D013J26				SHEET 1/2	
	В			A	

	τ	۵	п	m	D	0	
		Contact Layout				Ра	nel Cutou
		26				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
4		P o B				R1 >	
					A I		
		2#12			2 -		i.
		6#22D	1		te		
	Ctc	13-26 X Y				(I + V)	T_
	A	0 3.47				ØA	
	В	2.47 4.34				Disc	
	С	2.47 -4.34				Dim ØA	
ယ	D	0 -3.47 -2.47 -4.34				ØAA R1	
	F	-2.47 -4.34				ØT	
	1	3.25 0					
	2	-3.25 0					
-	_						
						SOURIAU shall not be liab due to a use of the Pro	
						the Specifications issued by	y either of
						(professional recor	mmendat
N							Country
10							FR
						PN: 81	D013.
					A 14-10-20	016 First Release	
					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE		nposite
					SCALE		al linear
_					NA		rances: ±
					SOURIA	U WWW.SOUR	RIAU.C
					FORMAT		
					A3		RIAU 013J2
	H	G	F	E	D	C	
					V		

