

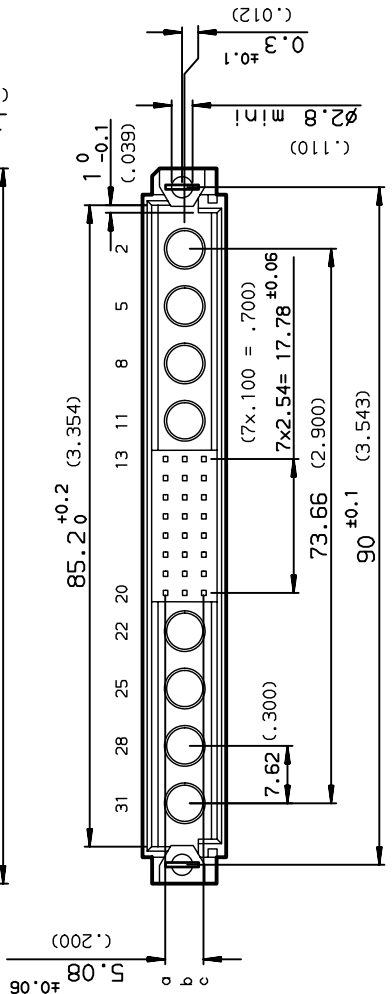



DIMENSIONS

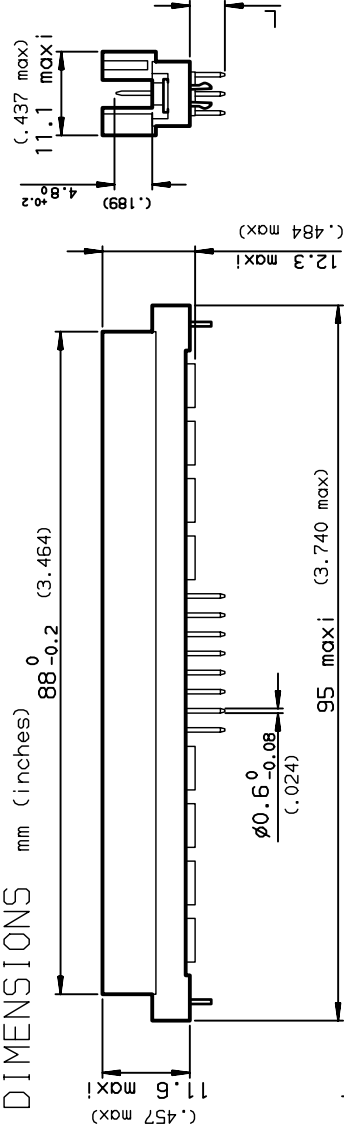

PCB DRILLING

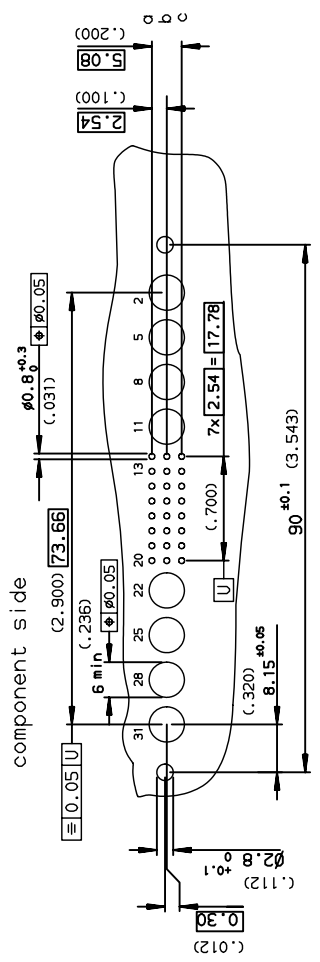

PART NUMBER	8609	G8	5
PIN OUT			
ROWS a-b-c		3	24
ROWS a-c		4	16
NUMBER OF CONTACTS			
TERMINATION			
L = 17.95 ±0.25 (.706)			25
L = 2.70 ±0.25 (.106)			24
L = 4.65 ±0.25 (.183)			14
OPTIONS			
no option			7
with harpoons			A
			H
			A
			R
PERFORMANCE CLASS			
DIN 41612 class 3			4
DIN 41612 class 2			5
DIN 41612 class 1			6
TERMINATION TYPE			
TIN LEAD			000E1
LEAD FREE			ETLF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS: SEE DRAWING C-8609-0000A

www.fciconnect.com

surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR	0.X ±0.1	size	A3
		LINEAR	0.XX ±0.1	ECN	L508-0126
		0.XX' ±2.	0.XXX ±0.1	Product family	DIN 8609 Spec ref -
		0.XX' ±2.	0.XXX ±0.1	Scale	1.5

Dr. ROUILLARD 1996/02/22
Eng. TARON 1996/02/22
Chr. LEGARE 1996/02/22
Appr. LEGARE 1996/02/22

Dr. ROUILLARD 1996/02/22
Eng. TARON 2005/03/01
Chr. LEGARE L60 2006/06/26
Appr. LEGARE HLE 2006/05/13

FCI

STRAIGHT MALE WITH SPECIAL CONTACTS
SOLDER TO BOARD

C-8609-0505

Rev. D

SEE TABLE

CUSTOMER sheet 1 of 1