


规格 Specifications

额定负荷 Rdtings	DC_30_V_100_mA
初期接触电阻 Initial Contact Resistance	1Ω Max.
绝缘电阻 Insulation Resistance	DC100V_60_Sec.100MΩ Min.
抗电强度 Dielectric Voltage	AC_100_V(50~60HZ)_60_Sec.
操作力 Operating Force	30_gf Max.
负荷寿命 Operating Life With Load	50,000次Cycles

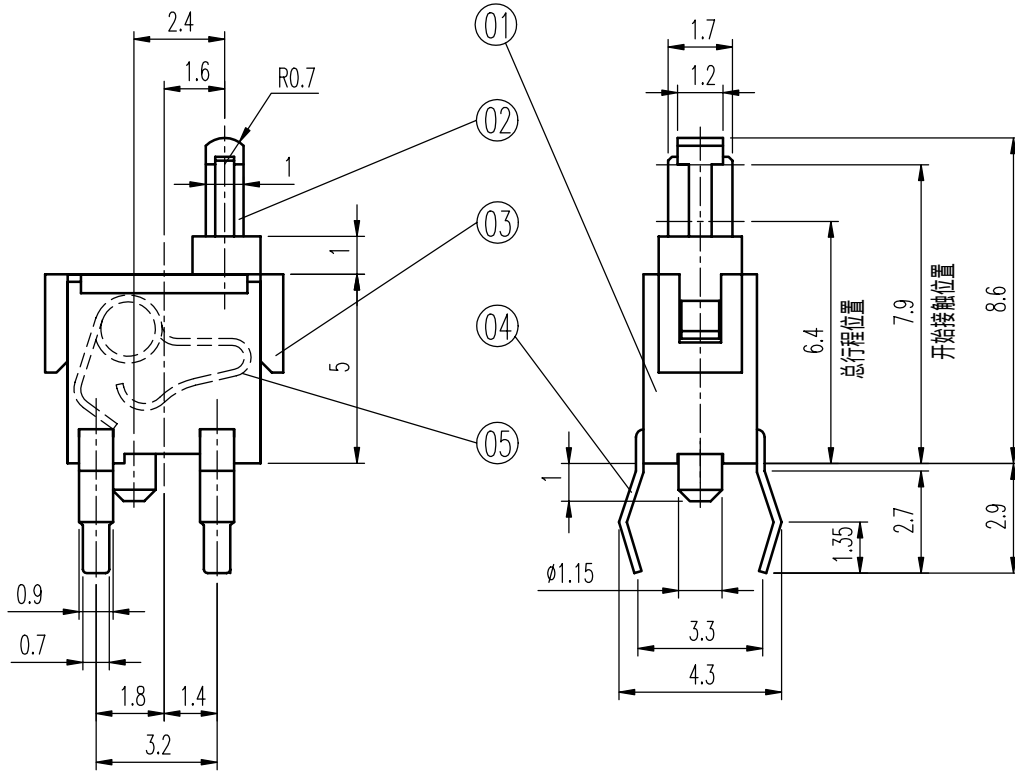

1P - 1T





示意图 SCHEMATIC



安装孔 PIERCING PLAN

05	弹簧 SPRING	C5191W	1	Au PLATED				
04	端子 TERMINAL	C2680R	4	Ag PLATED				
03	胶盖 COVER	PA	1	BLACK C				
02	胶柄 KNOB	PA	1	BLACK C				
01	胶壳 HOUSING	PA	1	BLACK C	标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	DWG NO. ITEM2911			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	DETECTOR SWITCH		ITEM NO	DS-02005 (30)		
UNDER 1	± 0.10	DRAWN	张渠江	2007-10-13	VERSION	A01	PAGE	1 OF 1
1 - 10	± 0.30	REVIEWED	方勇(代)	2007-10-13	SCALE	NO SCALE	UNIT	mm
OVER 10	± 0.50	APPROVED	程先金	2007-10-13	PROJECTION			

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.