



SPECIFICATIONS

| Model | Rated Torque | Max Rotation Speed | Max Cycle Rate |
|---------------|---|--------------------|----------------|
| FRT-G2-600-G3 | $(6.0 \pm 1.2) \times 10^{-3} \text{Nm}$ (60±12gfcm) | 50 RPM | 10 cycles/min. |

| Operating Temperature | Weight | Body & Cap Material | Rotating Shaft Material | Gear Material | Oil Type |
|-----------------------|--------|---------------------|-------------------------|---------------|--------------|
| 0 ~ 50°C | 0.9g | Polycarbonate | Polyacetal | Polyacetal | Silicone Oil |

Note 1) Rated torque measured at a rotation speed of 20rpm at 23°C


Note 2) Models with gears bear G1, G2 or G3 at the end of their model numbers

Note 3) Torque can be customized by changing the oil viscosity


GEAR SPECIFICATIONS

| Model | Type | Tooth Profile | Module | Pressure Angle | Number of Teeth | Pitch Circle Diameter | Addendum Modification Coefficient | Weight (damper+gear) |
|-------|--------------------|---------------|--------|----------------|-----------------|-----------------------|-----------------------------------|----------------------|
| G3 | Standard Spur Gear | Involute | 0.8 | 20° | 11 | ø8.8 | — | 0.9g (0.6g+0.3g) |

DAMPING CHARACTERISTICS

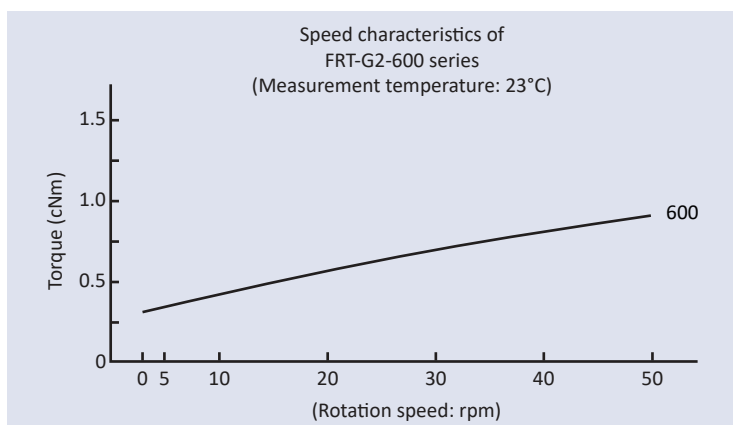

■ **Speed characteristics:** A rotary damper's torque varies according to the rotation speed. In general, as shown in the graph above, the torque increases as the rotation speed increases, and the torque decreases as the rotation speed decreases. In addition, please note that the starting torque slightly differs from the rated torque.

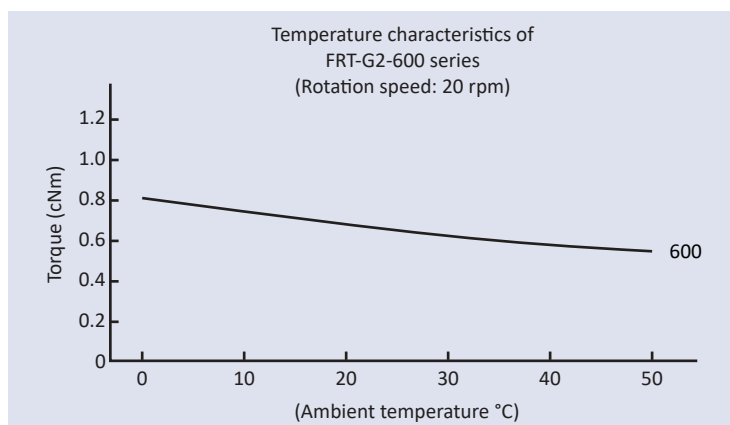

■ **Temperature characteristics:** A rotary damper's torque varies according to the ambient temperature. In addition, as shown in the graph above, the torque decreases as the ambient temperature increases, and the torque increases as the ambient temperature decreases. This is because the viscosity of the silicone oil inside the damper varies according to the temperature. When the temperature returns to normal, the torque will return to normal as well.