

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK Plug (Type G) BS1363A, Fused at 3A to IEC320-C5, GT Cable #426: 0.75mmsq / 3 Conductors, 6.8 +/- 0.3mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2050mm, GlobTek Black
	Model No. Power Cord
Part No./Ordering No. 6104262M0712(R)	Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification
ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <https://www.globtek.com/iso-certificates/>
Prop 65 Statement: <https://en.globtek.com/prop-65-statement.pdf>

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<https://en.globtek.com/terms-and-conditions/>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.
Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.
A delay in receipt of this form will delay delivery schedule.

Company Name: _____	Customer P/N: _____
Quote Number: _____	Date: _____
Authorized Representative Name: _____	Authorized Representative Signature: _____

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK Plug (Type G) BS1363A, Fused at 3A to IEC320-C5, GT Cable #426: 0.75mmsq / 3 Conductors, 6.8 +/- 0.3mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2050mm, GlobTek Black	
	Model No. Power Cord	
Part No./Ordering No. 6104262M0712(R)		Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
D1	Add cable diameter tolerance to the spec; add UKCA approval marking to the connector (effective for productions beginning with lot reference (L/R) 8005831 and later).	bsiep	05/24/2021	QA
D	Update to SF format; Add Malaysia, Saudi Arabia, and Gulf State approvals	bsiep	10/09/2020	QA

Cordset Information:

CordsetColor:GlobTek Black

Cord Length (mm):2050



NOTES:

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK Plug (Type G) BS1363A, Fused at 3A to IEC320-C5, GT Cable #426: 0.75mmsq / 3 Conductors, 6.8 +/- 0.3mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2050mm, GlobTek Black
	Model No. Power Cord
Part No./Ordering No. 6104262M0712(R)	Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

END A

END B

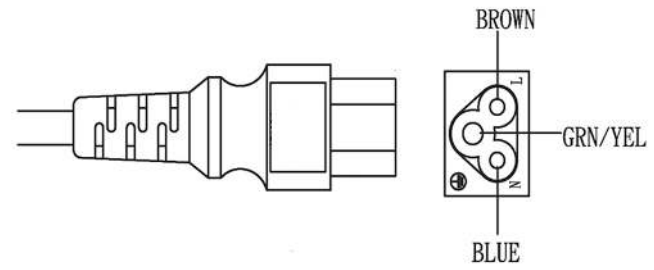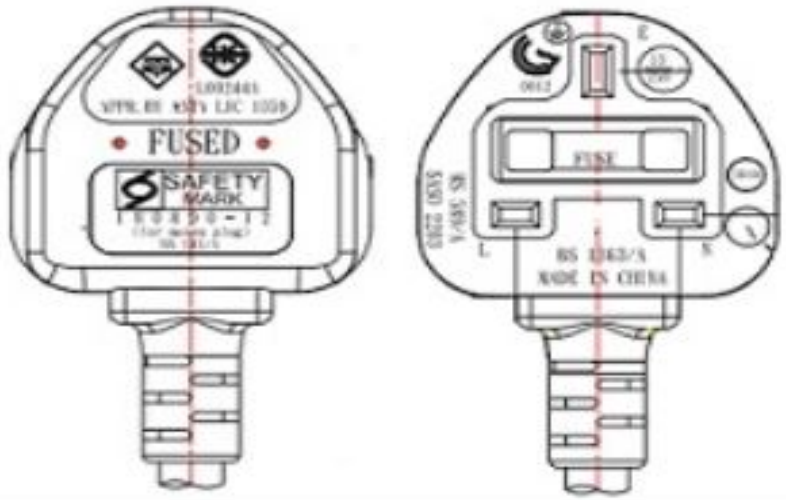

PROPRIETARY INFORMATION


PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2023

quest /08/11/2023 11:11:46 AM

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK Plug (Type G) BS1363A, Fused at 3A to IEC320-C5, GT Cable #426: 0.75mmsq / 3 Conductors, 6.8 +/- 0.3mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2050mm, GlobTek Black
	Model No. Power Cord
Part No./Ordering No. 6104262M0712(R)	Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

CABLE IMAGE

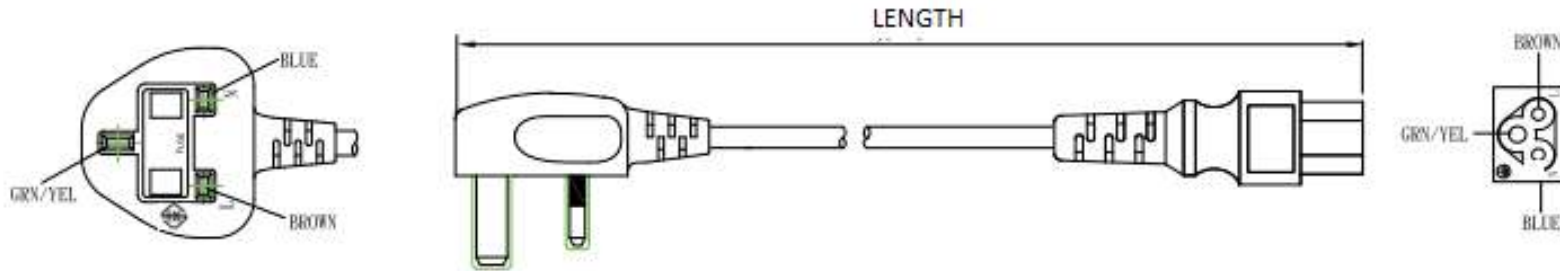


GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK Plug (Type G) BS1363A, Fused at 3A to IEC320-C5, GT Cable #426: 0.75mmsq / 3 Conductors, 6.8 +/- 0.3mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2050mm, GlobTek Black
	Model No. Power Cord
Part No./Ordering No. 6104262M0712(R)	Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE


End A Code:PZ0800-3A Description:UK Plug (Type G) BS1363A, Fused at 3A Rating (V):250 Rating (A):10.0 Gender:Male Overmolded:Yes	Cable Code:426 Description:GT Cable #426: 0.75mmsq / 3 Conductors, 6.8 +/- 0.3mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227 Color:GlobTek Black Wire Gauge(AWG):0.75mmsq Cond:3 Type:H05VV-F Temperature:70° C Amps:10 Volts:500 OD:6.8 +/- 0.3 ConductorsColors:BLU/BRN/GRN-YW	End B Code:712EU Description:IEC320-C5 Rating (V):250 Rating (A):2.5 Gender:Female Overmolded:Yes
--	--	---

Overall cable rating:2.5A / 250V~

Plug Approvals	Cable Approvals	Connector Approvals
 United Kingdom ASTA Diamond Approval Mark  SAFETY MARK (file # only -- SASO 2203) Saudi Arabia SASO safety mark Malaysia (File number)	 IEC 60227 BS1363/A plug	 EN 10 DYE ENEC-VDE  UKCA UKCA Certification

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK Plug (Type G) BS1363A, Fused at 3A to IEC320-C5, GT Cable #426: 0.75mmsq / 3 Conductors, 6.8 +/- 0.3mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2050mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 6104262M0712(R)	Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

 Gulf Conformity mark	
AGENCY ONLINE DOCUMENTS	http://en.globtek.com/cordsets/
RoHS/RoHS3 Declaration	https://www.globtek.com/pdf/rohs_cert/01t30000002p8dyAAA
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf
Prop 65 Statement	https://en.globtek.com/prop-65-statement.pdf
CE.UKCA.Cord	https://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01t30000002p8dy
IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.	

PROPRIETARY INFORMATION


PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2023

quest /08/11/2023 11:11:46 AM

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: UK Plug (Type G) BS1363A, Fused at 3A to IEC320-C5, GT Cable #426: 0.75mmsq / 3 Conductors, 6.8 +/- 0.3mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2050mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 6104262M0712(R)	Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Hanking:200
 Description:200 +/- 20mm
 Image:

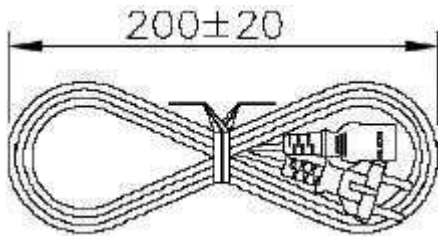

Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):