


About 10 Ring



(130)

Cable Outline (Ref.)



Sponge W/Double Side Tape

13

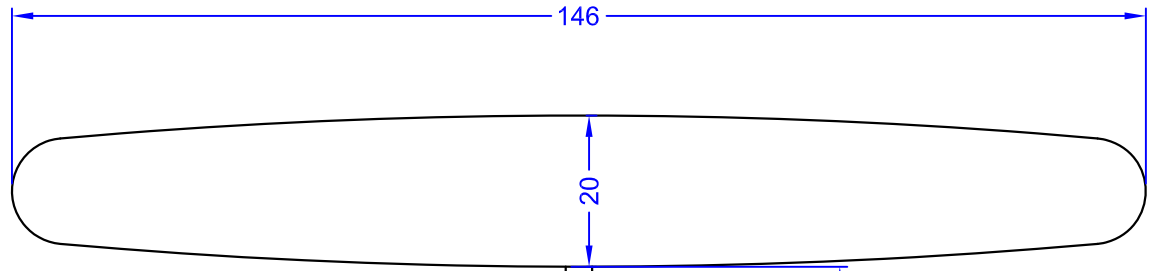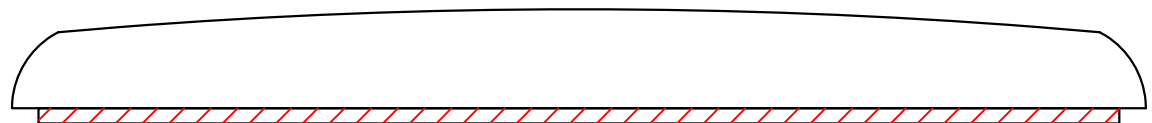

146

20


Electrical Properties:

- Frequency Range: 824~960 MHz
1710~2170 MHz
- Impedance: 50Ω Nominal
- VSWR: ≤2.0
- Gain: 2 dBi
- Radiation: Omni
- Polarization: Vertical

Mechanical Properties:

- Cable: RG174
- Cable Length: 2780mm Nominal
- Connector: SMA Plug, Matrial Brass
- Overmold Housing: ABS(Black)
- Mounting: Double side tape
- Weight: 61 g (est.)
- Operation Temp.: -20°C to +65°C

This is a RoHS compliant product.

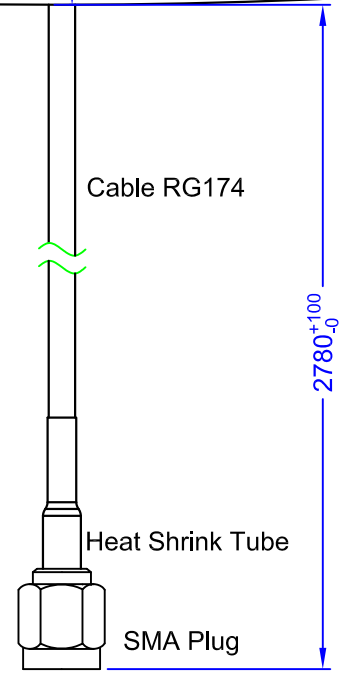

Cable RG174

Heat Shrink Tube

SMA Plug

2780⁺¹⁰⁰₋₀

TITLE	AMPS/GSM/DCS/PCS/UMTS		REV. DATE	SHEET
	Multi-Band Glass Mount Antenna - 601 Model		09/21/14	1 of 1
UNIT	DWG. NO.	W601DT-110AM-AGDPU		
in.(mm)	NEARSON			
SCALE				
1:1				