

# Data sheet

Order No.: 1071012

Type: SPTAF 1/ 4-3,5-IL-EX

PCB terminal block, Push-in spring connection



The figure shows 10-pos. standard item (without EX marking)

## 1 Main features



- |                           |                           |                        |      |
|---------------------------|---------------------------|------------------------|------|
| • No. of pos.             | 4                         | • Nominal current      | 16 A |
| • Conductor cross section | 1.5 mm <sup>2</sup>       | • Nominal voltage      | 44 V |
| • Color                   | green (6021)              | • Connection direction | 45 ° |
| • Pitch                   | 3.5 mm                    | • Type of packaging    | Tray |
| • Connection method       | Push-in spring connection |                        |      |

## 2 Your advantages

- ✓ Time saving push-in connection, tools not required
- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Intuitive use through colour coded actuation lever
- ✓ Small component size for applications where space is at a premium
- ✓ Satisfies the more stringent safety requirements of “Ex eb” protection according to IEC 60079-7 for potentially explosive areas
- ✓ Quick and convenient testing using integrated test option



Make sure you always use the latest documentation.

It can be downloaded at: [phoenixcontact.net/product/1071012](https://phoenixcontact.net/product/1071012)

**1071012 SPTAF 1/ 4-3,5-IL-EX****3 Table of contents**

|    |  |    |
|----|--|----|
| 1  | Main features.....   | 1  |
| 2  | Your advantages .....  | 1  |
| 3  | Table of contents .....  | 2  |
| 4  | 3D model in PDF can be activated (Acrobat Reader only).....      | 3  |
| 5  | General Technical Data .....                                     | 4  |
|    | 5.1 item properties .....  | 4  |
|    | 5.2 Connection capacity .....                                    | 4  |
|    | 5.3 Connection capacity AWG .....                                | 4  |
| 6  | Material properties.....   | 4  |
|    | 6.1 Material of metal parts.....                                 | 4  |
|    | 6.2 Material of plastic parts .....                              | 4  |
| 7  | Dimensions.....  | 6  |
|    | 7.1 Dimensions for the product .....                             | 6  |
| 8  | Series drawing.....  | 7  |
|    | 8.1 Dimensions for PCB design.....                               | 8  |
| 9  | Application.....   | 8  |
|    | 9.1 General information.....                                     | 8  |
| 10 | Packaging information .....                                      | 8  |
|    | 10.1 Temperature limit values .....                              | 8  |
| 11 | Mechanical tests.....  | 9  |
|    | 11.1 Pull-out test .....   | 9  |
|    | 11.2 Check for damage to conductor or loosening .....            | 9  |
| 12 | Electrical tests .....   | 10 |
|    | 12.1 Electrical data .....                                       | 10 |
|    | 12.2 Short-time withstand current test .....                     | 10 |
|    | 12.3 Aging test (climatic impact and corrosion testing).....     | 10 |
|    | 12.4 Mechanical connection test for the PCB terminal block ..... | 10 |
|    | 12.5 Temperature rise test.....                                  | 10 |
| 13 | Current carrying capacity/derating curves .....                  | 11 |
| 14 | Environmental and durability tests .....                         | 12 |
|    | 14.1 Vibration test .....  | 12 |
|    | 14.2 Assessment of fire risk (glow wire test).....               | 12 |
|    | 14.3 Shock protection .....                                      | 12 |
| 15 | Approvals .....  | 12 |
| 16 | Commercial Data.....   | 13 |
| 17 | Accessories.....   | 13 |

1071012 SPTAF 1/ 4-3,5-IL-EX

4 3D model in PDF can be activated (Acrobat Reader only)



**1071012 SPTAF 1/ 4-3,5-IL-EX****5 General Technical Data****5.1 item properties**

|  |                           |
|--|---------------------------|
| Order No.  | 1071012                   |
| Type   | SPTAF 1/ 4-3,5-IL-EX      |
| Product type                                     | PCB terminal block        |
| Range of articles                                | SPTAF 1/..-IL-EX          |
| Pitch  | 3.5 mm                    |
| Range of positions                               | 2...18                    |
| Number of positions                              | 4                         |
| Number of levels                                 | 1                         |
| Connection method                                | Push-in spring connection |
| Mounting type                                    | Wave soldering            |
| Connection direction of the conductor to the PCB | 45 °                      |
| Pin layout                                       | Linear pinning            |
| Solder pins per potential                        | 2                         |

**5.2 Connection capacity**

|   |   |
|---|---|
| Examination certificate   | SEV 19 ATEX 0159 U  |
|   | 0344 <sup>(Ex)</sup> II 2G Ex eb IIC T6...T1 Gb   |
| IECEX certificate   | IECEX SEV 19.0026U  |
| Conductor cross section, solid  | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (When connecting and possibly adjusting a solid conductor of 1.5 mm <sup>2</sup> , the mechanical lateral forces, which can affect the terminal block, have to be absorbed by lateral support.) |
| Conductor cross section, flexible                                     | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>   |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm <sup>2</sup> ... 0.75 mm <sup>2</sup>   |
| Conductor cross section flexible, with ferrule with plastic sleeve    | 0.25 mm <sup>2</sup> ... 0.75 mm <sup>2</sup>   |
| Stripping length  | 8 mm  |

**5.3 Connection capacity AWG**

|                             |           |
|-----------------------------|-----------|
| Conductor cross section AWG | 24 ... 16 |
|-----------------------------|-----------|

**6 Material properties****6.1 Material of metal parts**

|                         |   |
|-------------------------|---|
| Note                    | WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material        | Cu alloy  |
| Terminal point surface  | Tin (2 - 4 μm Sn)   |
| Soldering area surface  | Tin (2 - 4 μm Sn)   |
| Surface characteristics | hot-dip tin-plated  |

**6.2 Material of plastic parts**

**1071012 SPTAF 1/ 4-3,5-IL-EX**

|  | Housing      | Actuation element |
|--|--------------|-------------------|
| Color                                  | green (6021) | orange (2003)     |
| Insulating material                    | PA           | PBT               |
| Insulating material group              | I            |                   |
| CTI according to IEC 60112             | 600          | 275               |
| Flammability rating according to UL 94 | V0           | V0                |

**1071012 SPTAF 1/ 4-3,5-IL-EX****7 Dimensions****7.1 Dimensions for the product**

|                             |         |
|-----------------------------|---------|
| Length                      | 11 mm   |
| Width                       | 15.5 mm |
| Height (without solder pin) | 8 mm    |
| Total height                | 10.6 mm |
| Solder pin [P]              | 2.6 mm  |
| Dimension a                 | 10.5 mm |

1071012 SPTAF 1/ 4-3,5-IL-EX

8 Series drawing

| pos. | dim. a      | dim. w      |
|------|-------------|-------------|
| 2    | 3.50 ±0.10  | 8.50 ±0.15  |
| 3    | 7.00 ±0.15  | 12.00 ±0.15 |
| 4    | 10.50 ±0.15 | 15.50 ±0.15 |
| 5    | 14.00 ±0.15 | 19.00 ±0.20 |
| 6    | 17.50 ±0.15 | 22.50 ±0.20 |
| 7    | 21.00 ±0.20 | 26.00 ±0.20 |
| 8    | 24.50 ±0.20 | 29.50 ±0.20 |
| 9    | 28.00 ±0.20 | 33.00 ±0.20 |
| 10   | 31.50 ±0.20 | 36.50 ±0.20 |
| 11   | 35.00 ±0.20 | 40.00 ±0.20 |
| 12   | 38.50 ±0.20 | 43.50 ±0.20 |
| 13   | 42.00 ±0.20 | 47.00 ±0.20 |
| 14   | 45.50 ±0.20 | 50.50 ±0.25 |
| 15   | 49.00 ±0.20 | 54.00 ±0.25 |
| 16   | 52.50 ±0.25 | 57.50 ±0.25 |
| 17   | 56.00 ±0.25 | 61.00 ±0.25 |
| 18   | 59.50 ±0.25 | 64.50 ±0.25 |

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved. In case of patent, utility, model or design patent registrations, the Patent-, Gebrauchsmuster- oder Designrecht zum Nachdruck, zur Vervielfältigung dieses Dokuments, Verwertung und Weitergabe sowie Verbreitung dieses Dokuments, Vervielfältigung und Kommunikation von dessen Inhalt sind verboten, soweit nicht ausdrücklich gestattet. Zuwahlungen geben Anlass zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designrechte zum Nachdruck, zur Vervielfältigung dieses Dokuments, Verwertung und Weitergabe sowie Verbreitung dieses Dokuments, Vervielfältigung und Kommunikation von dessen Inhalt sind vorbehalten. In case of patent, utility, model or design patent registrations, the Patent-, Gebrauchsmuster- oder Designrecht zum Nachdruck, zur Vervielfältigung dieses Dokuments, Verwertung und Weitergabe sowie Verbreitung dieses Dokuments, Vervielfältigung und Kommunikation von dessen Inhalt sind vorbehalten. In case of patent, utility, model or design patent registrations, the Patent-, Gebrauchsmuster- oder Designrecht zum Nachdruck, zur Vervielfältigung dieses Dokuments, Verwertung und Weitergabe sowie Verbreitung dieses Dokuments, Vervielfältigung und Kommunikation von dessen Inhalt sind vorbehalten.

**1071012 SPTAF 1/ 4-3,5-IL-EX****8.1 Dimensions for PCB design**

|                |               |
|----------------|---------------|
| Hole diameter  | 1.1 mm        |
| Pin dimensions | 0.75 x 0.3 mm |

**9 Application****9.1 General information**

|                     |   |
|---------------------|---|
| Note on application | Maximum permissible outer diameter of the wire insulation $\leq 3$ mm |
|---------------------|---|

**10 Packaging information**

|                    |      |
|--------------------|------|
| Type of packaging  | Tray |
| Pieces per package | 110  |

**10.1 Temperature limit values**

|   |                   |
|---|-------------------|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C  |
| Ambient temperature (assembly)          | -5 °C ... 100 °C  |
| Ambient temperature (operation)         | -40 °C ... 100 °C |



**1071012 SPTAF 1/ 4-3,5-IL-EX****11 Mechanical tests****11.1 Pull-out test**

|  |  |
|--|--|
| Specification  | IEC 60999-1:1999-11                      |
| Result   | Test passed                              |
| Conductor cross section/conductor type/tractive force actual value | 0.2 mm <sup>2</sup> / solid / > 10 N     |
| Conductor cross section/conductor type/tractive force actual value | 0.25 mm <sup>2</sup> / flexible / > 10 N |
| Conductor cross section/conductor type/tractive force actual value | 1.5 mm <sup>2</sup> / solid / > 40 N     |
| Conductor cross section/conductor type/tractive force actual value | 1.5 mm <sup>2</sup> / flexible / > 40 N  |

**11.2 Check for damage to conductor or loosening**

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

**1071012 SPTAF 1/ 4-3,5-IL-EX****12 Electrical tests****12.1 Electrical data**

|   |                            |
|---|----------------------------|
| Rated current / conductor cross section | 16 A / 1.5 mm <sup>2</sup> |
| Rated insulation voltage (III/2)        |                            |
| Rated surge voltage (III/2)             |                            |
| Contact resistance                      |                            |
| Degree of pollution                     | 2                          |

**12.2 Short-time withstand current test**

|  |                              |
|--|------------------------------|
| Specification                              | IEC 60947-7-4:2013-08        |
| Result                                     | Test passed                  |
| Conductor cross section/short-time current | 1.5 mm <sup>2</sup> / 50.4 A |

**12.3 Aging test (climatic impact and corrosion testing)**

|  |                              |
|--|------------------------------|
| Specification  | IEC 60947-7-4:2013-08        |
| Result   | Test passed                  |
| Contact resistance R <sub>1</sub>                                    | 0.8 mΩ / 1.5 mm <sup>2</sup> |
| Test sequence 1: low temperature storage                             | -40 °C / 2 h                 |
| Test sequence 2: heat storage  | 168 h/100°C                  |
| Test sequence 3: noxious gas storage (ISO 6988)                      | KFW 0.2 S/1 cycle            |
| Contact resistance R <sub>2</sub>                                    | 0.9 mΩ / 1.5 mm <sup>2</sup> |
| Rated impulse voltage at sea level<br>Voltage waveform ≥ (1.2/50 μs) | 2.95 kV                      |
| Power-frequency withstand voltage<br>Voltage waveform ≥ (50/60 Hz)   | 1.4 kV                       |

**12.4 Mechanical connection test for the PCB terminal block**

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60947-7-4:2013-08 |
| Result        | Test passed           |


**12.5 Temperature rise test**

|   |  |
|---|--|
| Specification   | IEC 60947-7-4:2013-08  |
| Result  | Test passed  |
| Requirement temperature-rise test                     | The sum of ambient temperature and temperature rise of the PCB terminal block shall not exceed the upper limiting temperature. |
| Conductor cross section/test current/temperature rise | 1.5 mm <sup>2</sup> / 16 A / 33.5 K  |

1071012 SPTAF 1/ 4-3,5-IL-EX

13 Current carrying capacity/derating curves

Type: SPTAF 1/...-3,5-IL(EL)

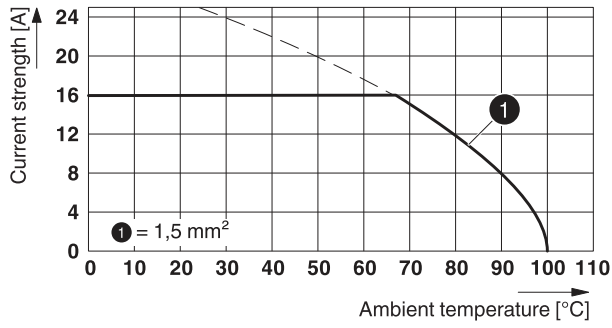

**1071012 SPTAF 1/ 4-3,5-IL-EX****14 Environmental and durability tests****14.1 Vibration test**

|                        |  |
|------------------------|--|
| Specification          | IEC 60068-2-6:2007-12  |
| Result                 | Test passed  |
| Frequency              | 10 - 150 - 10 Hz   |
| Sweep speed            | 1 octave/min   |
| Amplitude              | 0.35 mm (10 - 60.1 Hz)   |
| Test duration per axis | 2.5 h  |
| Test directions        | X-, Y- and Z-axis  |
| Note                   | The connected conductor loops were guided to the test sample at a distance of approx. 10 cm. |

**14.2 Assessment of fire risk (glow wire test)**

|                  |                        |
|------------------|------------------------|
| Specification    | IEC 60695-2-10:2013-04 |
| Result           | Test passed            |
| Temperature      | 850 °C                 |
| Time of exposure | 5 s                    |

**14.3 Shock protection**

|   |   |
|---|---|
| Specification                           | IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08 |
| Back of the hand protection (Ball ø 50) | guaranteed  |
| Finger protection (movable test finger) | guaranteed  |
| Note                                    |   |

**15 Approvals**

**1071012 SPTAF 1/ 4-3,5-IL-EX****16 Commercial Data**

|                    |  |
|--------------------|--|
| Order No.          | 1071012  |
| Type               | SPTAF 1/ 4-3,5-IL-EX                                 |
| Pieces per package | 110  |
| Net weight         | 2.171 g  |
| GTIN               | 4063151100797  |
|                    | Information that applies locally, see link on page 1 |
| Country of origin  | Information that applies locally, see link on page 1 |

**17 Accessories**

| Description  | Order No. | Type          |
|--|-----------|---------------|
| Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip | 1204504   | SZF 0-0,4X2,5 |