



Electrical Specifications

Center Frequency: 10560 MHz
3dB Bandwidth: 800 MHz
Pass Band: 10160-10960 MHz
Insertion Loss: 1.0 dB Max
Return Loss: 15 dB Min
Rejection: >20 dB @ 9960 MHz
 >35 dB @ 9730 MHz
 >20 dB @ 11160 MHz
 >35 dB @ 11360 MHz
Power: 10 W Max


Mechanical

Connector Type: RF Pins
Dimensions: 1.83 x 0.47 x 0.34 Inches

Environmental


Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C

Outline Drawing:

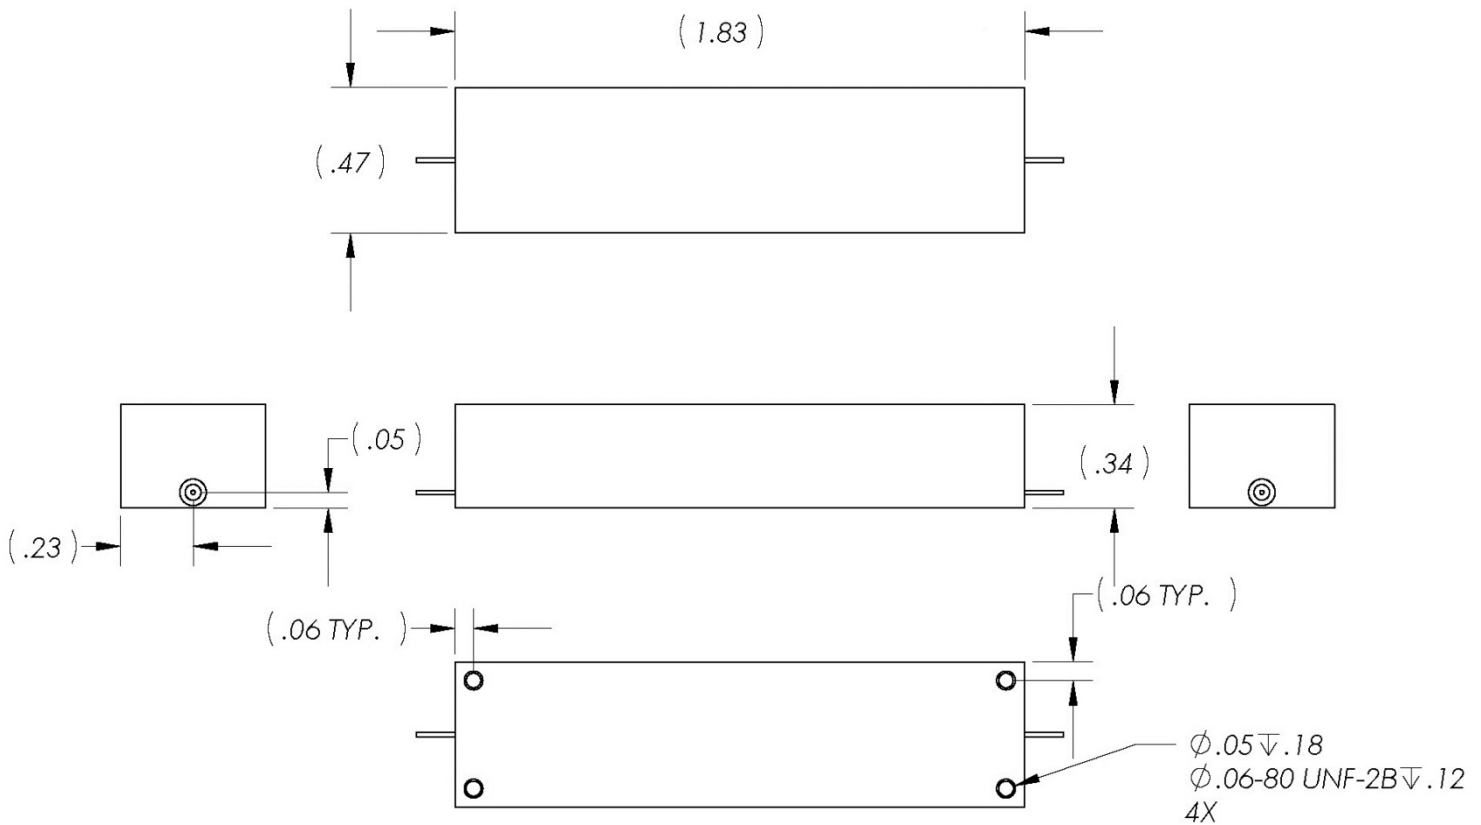



Response Plot:

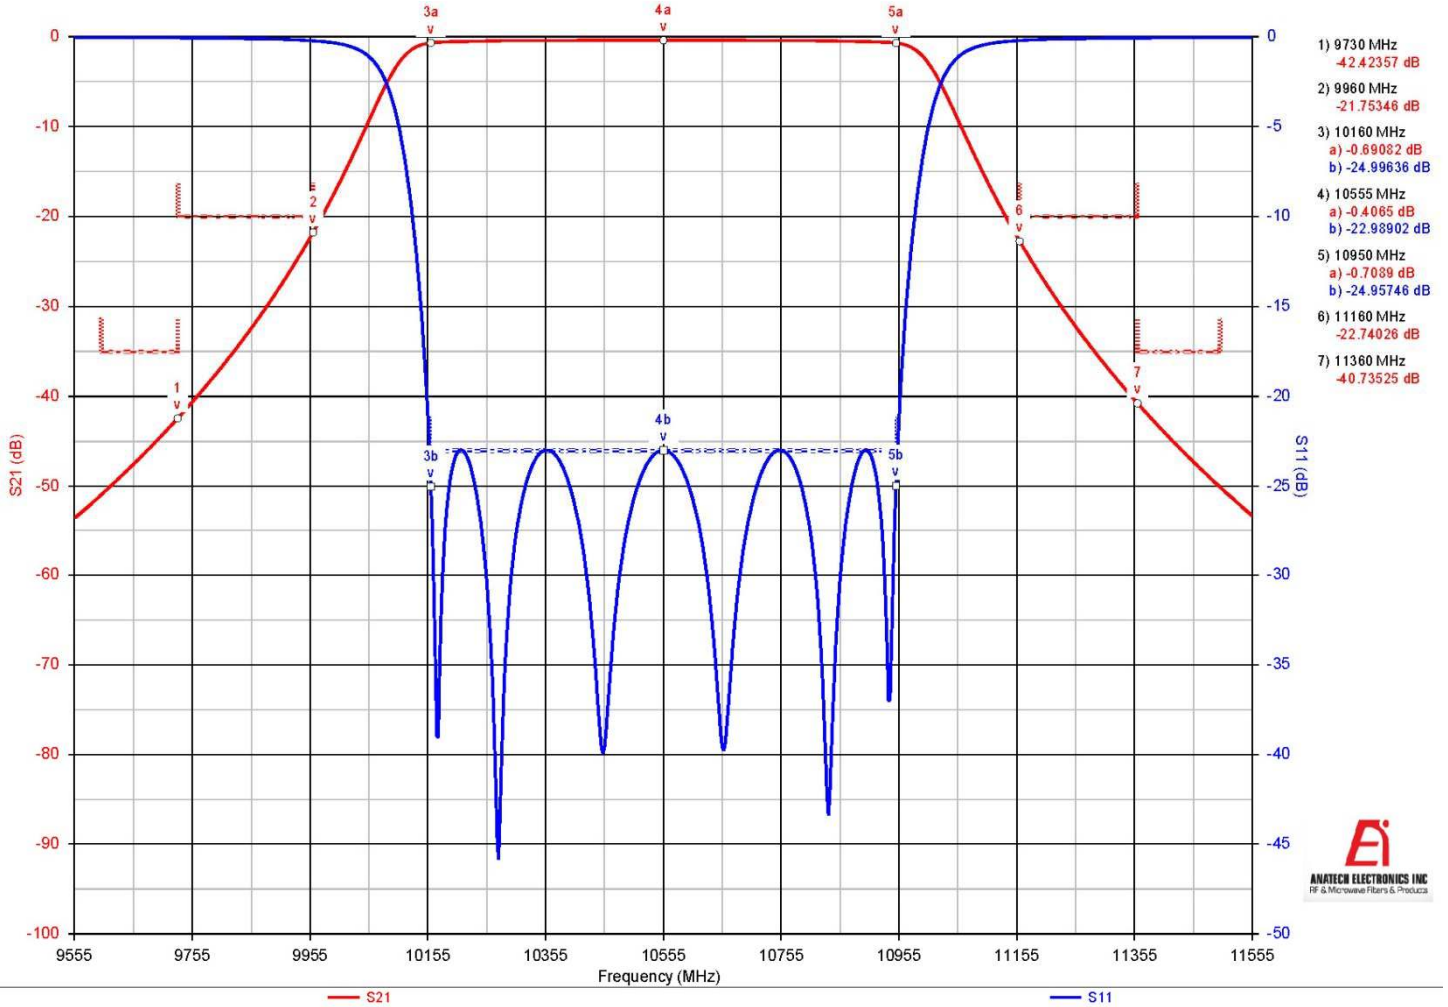

Note: This is a simulation plot. Actual results may differ once the product is implemented.