DEUTSCH | DEUTSCH DT

TE Internal #: DT06-3S-C017 Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DT Plug Connectors



Connector & Housing Type: Housing for Female Terminals

Mating Pin Diameter: 1.59 mm [.063 in]

Connector System: Wire-to-Wire

Number of Positions: 3

Centerline (Pitch): 10.01 mm [.394 in]

All DEUTSCH DT Plug Connectors (199)

Features

Prod	luct ⁻	Гуре	Features

Connector Shape	Triangular	
Connector & Housing Type	Housing for Female Terminals	
Connector System	Wire-to-Wire	
Sealable	Yes	
Hybrid Connector	No	
Primary Locking Feature	Integrated in Housing	
Connector & Contact Terminates To	Wire & Cable	
Configuration Features		
Blank Cavity Position	1, 2, 3	
Connector Modification	Solid Rear Grommet, End Cap	
Number of Positions	3	
Electrical Characteristics		

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Gray
Contact Features	
Contact Type	Socket
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Polarized
Mating Alignment	With

Housing Material

PA GF

10.01 mm[.394 in]

Dimensions

Connector Height	23.88 mm[.94 in]
Product Width	18.71 mm[.737 in]
Product Length	31.19 mm[1.228 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Degree of Protection	IP68, IP6К9К
Agency/Standard	SAE J2030
UL Flammability Rating	12mm Flame Test per Standard UL-94

Packaging Features

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



Packaging Quantity	1100
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in

Halogen Content

Solder Process Capability

Component Part)

Article Safe Usage Statements:

Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT






Also in the Series | DEUTSCH DT

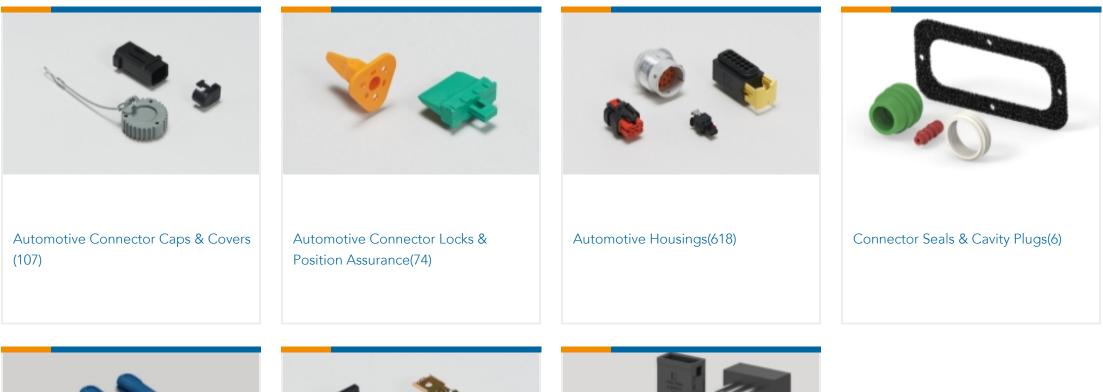








Insertion & Extraction Tools(3)

Other Automotive Connector Accessories(27) PCB Headers & Receptacles(103)

Customers Also Bought

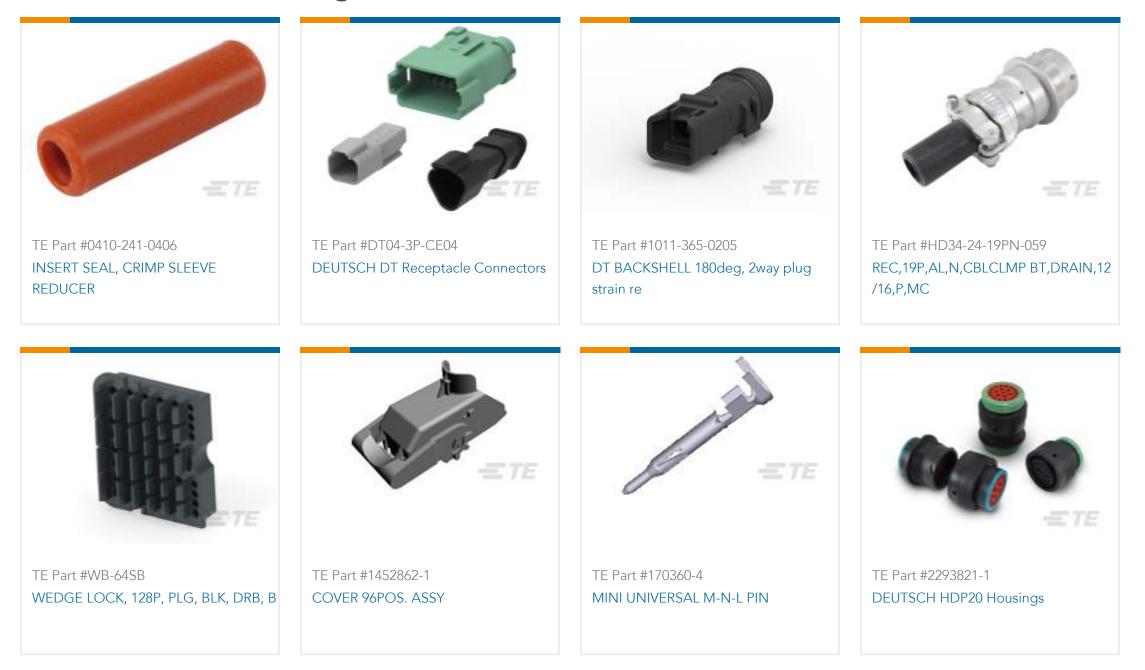

Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



Documents

Product Drawings PLG, 3P, GRY, BLOCKED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DT06-3S-C017_99_c-dt06-3s-c017-99.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DT06-3S-C017_99_c-dt06-3s-c017-99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DT06-3S-C017_99_c-dt06-3s-c017-99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications Application Specification

English

Agency Approvals UL Report

English