


REV. 1  
DCO 17094

COIL: @ 25°C	
RESISTANCE	700 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.0 VDC MAX, 1.5 VDC MIN

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 2.5 g's
SHOCK	100 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE & RELEASE 4 MS MAX
	CONTACT BOUNCE 2.0 MS MAX.
	5000 OPERATION MISS TEST

CUSTOMER DATA SHEET

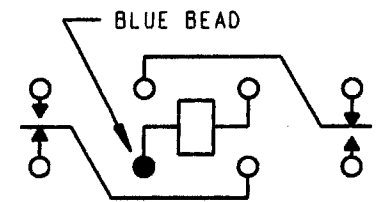

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2 A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 6/15/01 CK. TLG 6-18-01



CUST. GENICOM	"HFW" RELAY
CUST. NO. 3SAV5534HIR REV.	

HFW1230K17