

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

HOUSING: THERMOPLASTIC; BLACK

SEAL: SILICONE RUBBER

THREADED INSERT: STAINLESS STEEL

2. MODIFICATIONS: BACKSHELL RING ADAPTER (BRA);

THIN WALL DIA. WIRE SEAL; SEALED PANEL MOUNT


3. SPECIFICATIONS:

- 3.1 OPERATING TEMPERATURE: -55°C TO +125°C.
- 3.2 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
- 3.3 INSULATION RESISTANCE: 1000 MEGOHM MIN @ 25°C.
- 3.4 MOISTURE RESISTANCE:

IP68(IM OF WATER FOR A PERIOD OF 24 HOURS, MATED CONDITION);

IP69K(MATED CONDITION)

- 3.5 MATING CYCLE DURABILITY: 100 CYCLES
- 3.6 RoHS COMPLIANT
- 4. MATING PART: AHDP06-24-31S* (* = SEAL TYPE)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 6. RECEPTACLE IS SUPPLIED WITH DUST CAP (NOT SHOW)

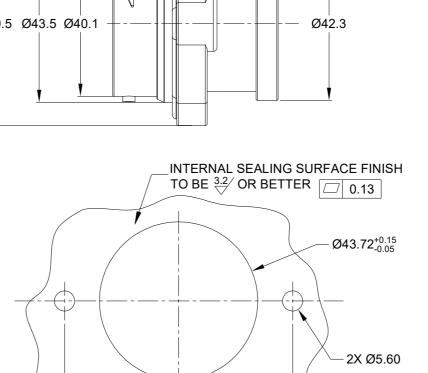

RECOMMENDED PANEL MOUNTING HOLE


63.0±0.1


RECOMMENDED PANEL THICKNESS:1.6 TO 4.7MM

7 CONTACT SIZE AND WIRE RANGE:

CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL	CURRENT
SIZE	O.D.	O.D.	WIRE RANGE	RATING
16	2.23 mm (.088 in)	2.69 mm (.106 in)	14-20 AWG (2.0-0.5mm²)	13 AMPS

REVISIONS							
REV	ECO	DESCRIPTION	DATE	BY	APPR		
A1	-	RELEASE NEW DRAWING	01/APR/22	IAN	TOMMY		

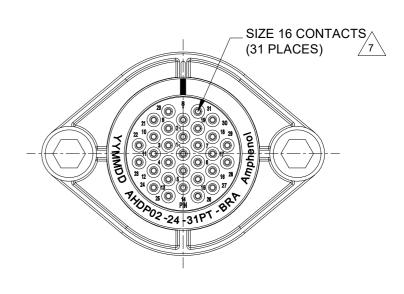

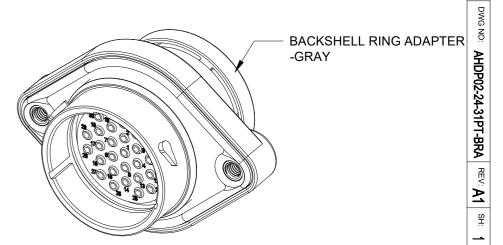

	AHDP02-2	4-31PT	-BRA						
QUANTITY	PART N	IUMBE	R			DE	SCRIPTION		ITEM
			MAT	ERI	ALS	S LI	ST		<u> </u>
UNLESS OTHER	WISE SPECIFIED	SIG	NATURES	DATE	ATE A A				
1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 Fractions ±1/64		DRAWN:	IAN.XIAO	01/APR/22	Amphenol				
2 PL DEC ±0.15 3 PL DEC ±0.08	CHECKED:	SULLEN.ZAHNG	02/APR/22	Sine Systems - www.amphenol-sine.com					
3) Note reference = \(\times \) MATERIAL SPECIFICATIONS: WEIGHT:62.7g PROCESS SPECIFICATIONS: NEXT ASS'Y:		ENGINEER:			44724 Morley Drive				
		APPROVAL:	TOMMY.XIE	06/APR/22	Clinton Township, MI 48036				
		CUSTOMER		TUINI CEAL DE		31POS,RECEPTACLE,PIN,24SZ,			
		THIS DRAW	ING IS SUPPLIED F			N SEAL, BRA, PANELI	PANELMATE AHDP		
		INFORMATION ONLY. DESIGN FEATURES,		size B	C-	AHDP02-24-3	1PT-BRA	REVISION A 1	
			URING VARIATION		SCALE: N	ONE	DURAMATE	sнеет 1 о	F 1