


Materials

Shell: brass, nickel plated
 Cable: stranded steel
 O-ring: nitrile rubber

Environmental requirements

Waterproof: IP67 when mating with corresponding (IP67) plug connector

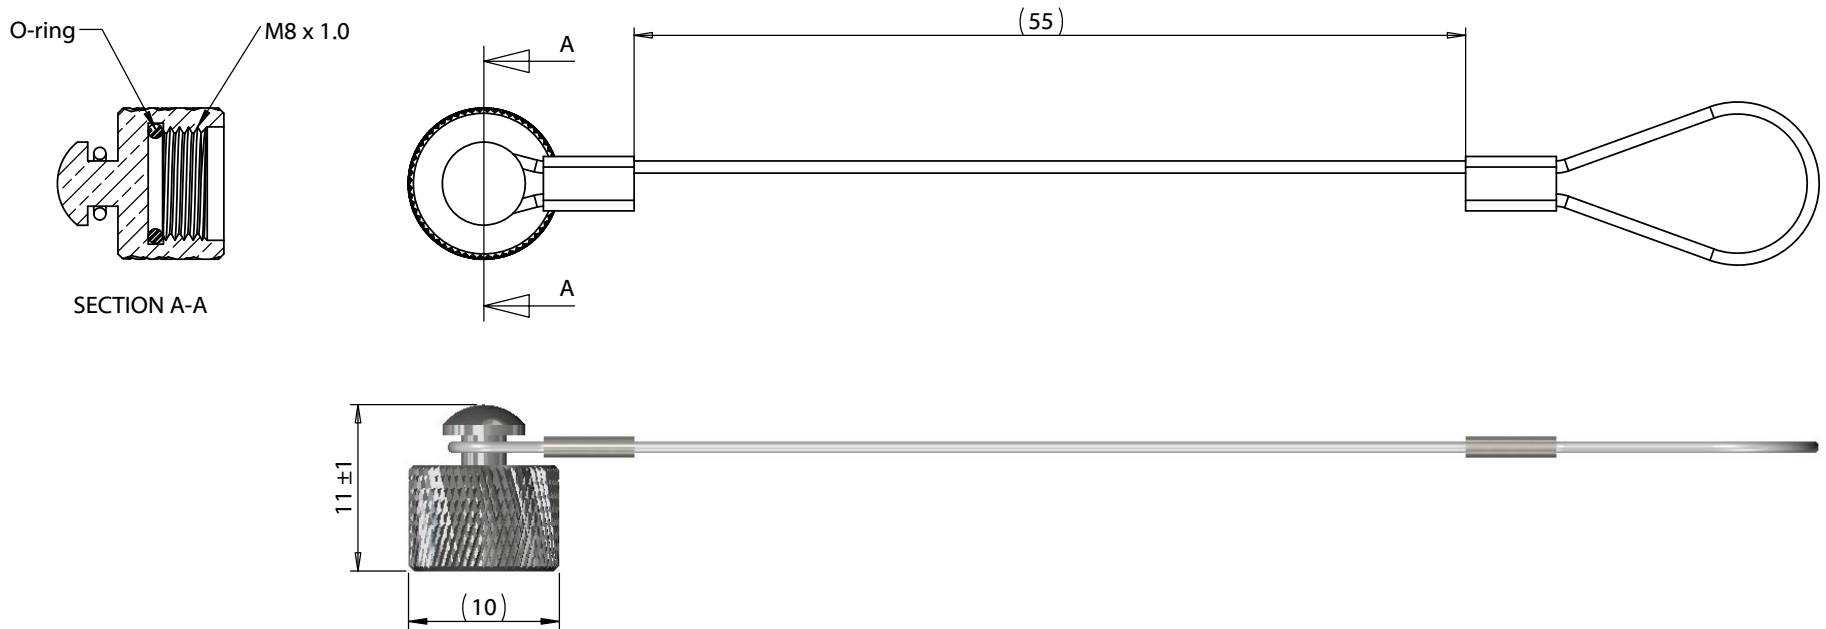

| | | | | | |
|-----------|------------|-----------------|--|---|---|
| Revision: | Date: | Description: | Prepared: | Notes: | TENSILITY |
| A | 09/14/2022 | Initial release | MP | | |
| | | | Verified: | Function test: no open, no short circuit, no intermittent | tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: | Size: A |
| | | | | Cap, M8 plug with leash, Ø10xL11 mm, brass, nickel plated | Part number: 55-00179 |
| | | | | Scale: 2:1 | Sheet 1 of 1 |

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com