


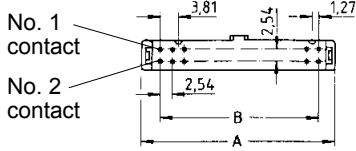





Number of contacts

6-64



Female connector

Identification	No. of contacts	Part number		Drawing	Dimensions in mm																																																																		
Female connector with central polarization without strain relief clamp 		open end cover	closed end cover	open end cover	closed end cover																																																																		
	6	09 18 506 □ 803	09 18 506 □ 804																																																																				
	10	09 18 510 □ 803	09 18 510 □ 804	option																																																																			
	14	09 18 514 □ 803	09 18 514 □ 804																																																																				
	16	09 18 516 □ 803	09 18 516 □ 804																																																																				
	20	09 18 520 □ 803	09 18 520 □ 804																																																																				
	24	09 18 524 □ 803	09 18 524 □ 804																																																																				
	26	09 18 526 □ 803	09 18 526 □ 804																																																																				
	30	09 18 530 □ 803	09 18 530 □ 804																																																																				
	34	09 18 534 □ 803	09 18 534 □ 804																																																																				
	40	09 18 540 □ 803	09 18 540 □ 804																																																																				
	50	09 18 550 □ 803	09 18 550 □ 804																																																																				
	60	09 18 560 □ 803	09 18 560 □ 804																																																																				
	64	09 18 564 □ 803	09 18 564 □ 804																																																																				
	without strain relief clamp with bulk packaging 2) Packaging unit (PU) 5,000 pieces 3) PU 3,000 pieces	6	09 18 506 □ 803 58U ²⁾		 No. 1 contact No. 2 contact  Marking No. 1 contact Strain relief clamp option 																																																																		
		10	09 18 510 □ 803 58U ²⁾																																																																				
		14	09 18 514 □ 803 58U ²⁾																																																																				
		16	09 18 516 □ 803 58U ²⁾																																																																				
		20	09 18 520 □ 803 58U ²⁾																																																																				
		26	09 18 526 □ 803 58U ²⁾																																																																				
30		09 18 530 □ 803 58U ²⁾																																																																					
40		09 18 540 □ 803 58U ³⁾																																																																					
with strain relief clamp 	6	09 18 506 □ 813	09 18 506 □ 814*	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>No. of contacts</td> <td>6</td> <td>10</td> <td>14</td> <td>16</td> <td>20</td> </tr> <tr> <td>A</td> <td>12.20</td> <td>17.30</td> <td>22.40</td> <td>24.90</td> <td>30.00</td> </tr> <tr> <td>B</td> <td>5.08</td> <td>10.16</td> <td>15.24</td> <td>17.78</td> <td>22.86</td> </tr> <tr> <td colspan="6"> </td> </tr> <tr> <td>No. of contacts</td> <td>24</td> <td>26</td> <td>30</td> <td>34</td> <td>40</td> </tr> <tr> <td>A</td> <td>35.18</td> <td>37.60</td> <td>42.70</td> <td>47.80</td> <td>55.40</td> </tr> <tr> <td>B</td> <td>27.94</td> <td>30.48</td> <td>35.56</td> <td>40.64</td> <td>48.26</td> </tr> <tr> <td colspan="6"> </td> </tr> <tr> <td>No. of contacts</td> <td>50</td> <td>60</td> <td>64</td> <td></td> <td></td> </tr> <tr> <td>A</td> <td>68.10</td> <td>80.80</td> <td>85.90</td> <td></td> <td></td> </tr> <tr> <td>B</td> <td>60.96</td> <td>73.66</td> <td>78.74</td> <td></td> <td></td> </tr> </table>		No. of contacts	6	10	14	16	20	A	12.20	17.30	22.40	24.90	30.00	B	5.08	10.16	15.24	17.78	22.86							No. of contacts	24	26	30	34	40	A	35.18	37.60	42.70	47.80	55.40	B	27.94	30.48	35.56	40.64	48.26							No. of contacts	50	60	64			A	68.10	80.80	85.90			B	60.96	73.66	78.74		
	No. of contacts	6	10			14	16	20																																																															
	A	12.20	17.30			22.40	24.90	30.00																																																															
	B	5.08	10.16			15.24	17.78	22.86																																																															
	No. of contacts	24	26			30	34	40																																																															
	A	35.18	37.60			42.70	47.80	55.40																																																															
	B	27.94	30.48			35.56	40.64	48.26																																																															
	No. of contacts	50	60			64																																																																	
	A	68.10	80.80			85.90																																																																	
	B	60.96	73.66			78.74																																																																	
	10	09 18 510 □ 813	09 18 510 □ 814*																																																																				
	14	09 18 514 □ 813	09 18 514 □ 814*																																																																				
	16	09 18 516 □ 813	09 18 516 □ 814*																																																																				
	20	09 18 520 □ 813	09 18 520 □ 814*																																																																				
24	09 18 524 □ 813	09 18 524 □ 814*																																																																					
26	09 18 526 □ 813	09 18 526 □ 814*																																																																					
30	09 18 530 □ 813	09 18 530 □ 814*																																																																					
34	09 18 534 □ 813	09 18 534 □ 814*																																																																					
40	09 18 540 □ 813	09 18 540 □ 814*																																																																					
50	09 18 550 □ 813	09 18 550 □ 814*																																																																					
60	09 18 560 □ 813	09 18 560 □ 814*																																																																					
64	09 18 564 □ 813	09 18 564 □ 814*																																																																					
with strain relief clamp with bulk packaging 3) Packaging unit (PU) 3,000 pieces 4) PU 2,500 pieces 5) PU 2,000 pieces 6) PU 1,500 pieces 7) PU 1,000 pieces	6	09 18 506 □ 813 58U ³⁾																																																																					
	10	09 18 510 □ 813 58U ³⁾																																																																					
	14	09 18 514 □ 813 58U ⁴⁾																																																																					
	16	09 18 516 □ 813 58U ⁴⁾																																																																					
	20	09 18 520 □ 813 58U ⁵⁾																																																																					
	26	09 18 526 □ 813 58U ⁶⁾																																																																					
	30	09 18 530 □ 813 58U ⁵⁾																																																																					
	40	09 18 540 □ 813 58U ⁷⁾																																																																					

For performance level 3 please specify digit
 For performance level 2 please specify digit
 S4 = 0.76 μm (30 μinch) Au or PdNi equivalent



¹⁾ Pitch tolerance: ± 0.1
 * Not normally kept in stock