

9

8

7

6

5

4

3

2

1




E

D

C

B

A

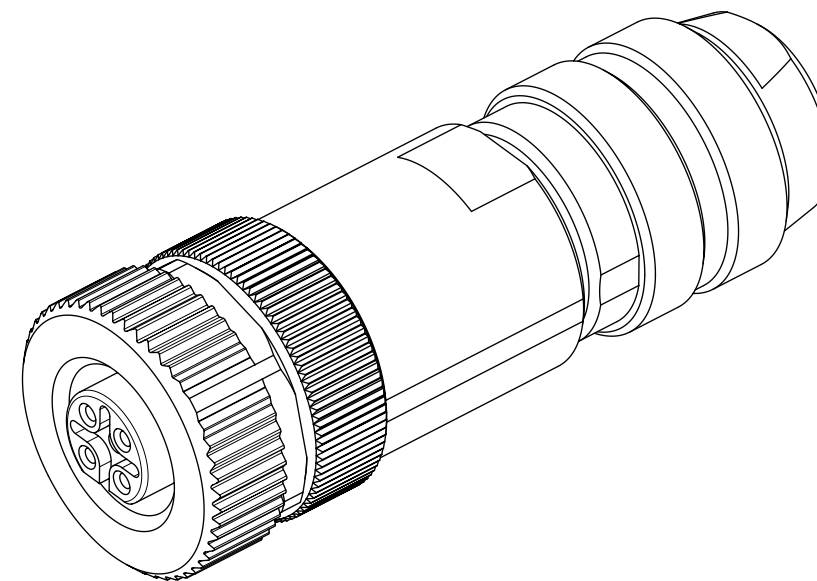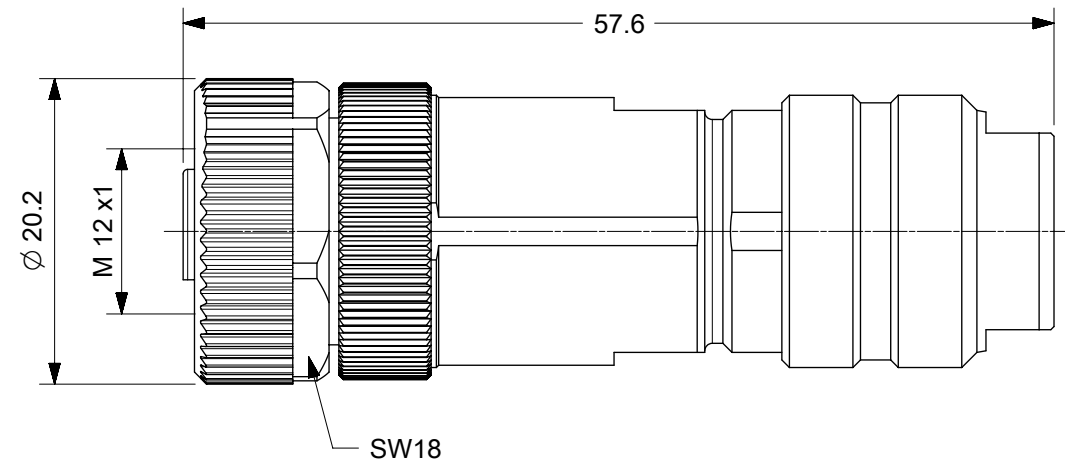


PRE-RELEASE
REFERENCE
USE ONLY

NOTES:

1. LOCKING SYSTEM: SCREW
WIRE GAUGE: 0.75mm²
CABLE OUTLET: 6,5 - 8,5mm
2. ELECTRICAL DATA:
CURRENT RATING: 4A
VOLTAGE RATING: 60V
3. MECHANICAL:
OPERATING TEMP.: -40°C to +85°C
PROTECTION CLASS: IP67
4. MATERIAL:
CONTACT: CuZn (BRASS)
CONTACT PLATING: Au (GOLD)
HOUSING: zinc die cast
COUPLING NUT: CuZn (BRASS)

ENG.-NO: BA5S00-32

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
QUALITY SYMBOLS		2016/08/10 EC NO: 107393 DRWN: LRAMAMURTHY CHK'D: APPR:		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex® FA M12 PRO 5P BC FE STR SCR SHLD			
FA = 0 FE = 0 FP = 0 ▼ = 0 C = 0 ☒ = 0 ■ = 0 ✓ = 0						MM		2:1					
				ANGULAR TOL ± 1.0 °		DRWN BY		DATE					
				4 PLACES ±		KGRUEDL		2015/11/25					
				3 PLACES ±		CHK'D BY		DATE					
				2 PLACES ± 0.05		APPR BY		DATE					
1 PLACE ± 0.3				CBRUNS		2016/04/08							
0 PLACES ± 0.5		DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES		MATERIAL NUMBER		CUSTOMER			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A3				120100		1201000001		GENERAL MARKET			
A3		REV				DOCUMENT NUMBER		DOC TYPE		DOC PART		SHEET NUMBER	
						1201000001		PSD		000		1 OF 1	

RELEASE STATUS RQ RELEASE DATE 25.08.2016 14:38:21

9

8

7

6

5

4

3

2

1

E

D

C

B

A

FORMAT: master-B-prod-A3
REVISION: 15
DATE: 2015/12/14