


RB3100



Incremental encoder with solid shaft

INCREMENTAL ENCODER BASIC LINE

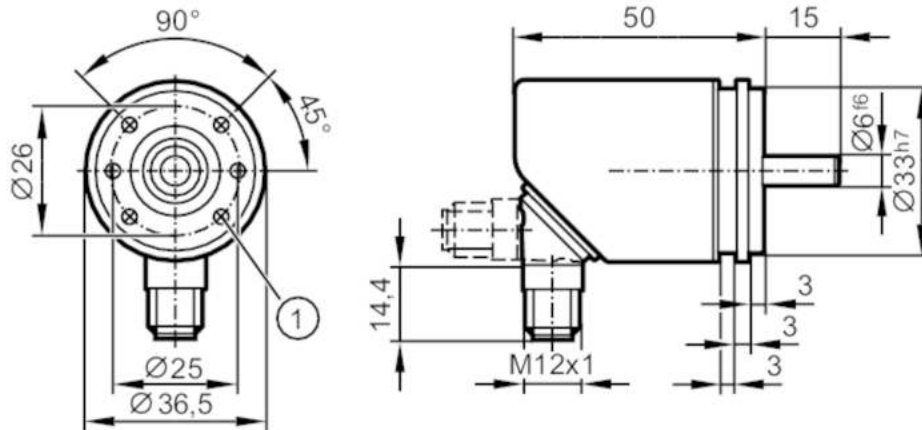

1 M3 x 0.5 Depth 6 mm



Product characteristics

| | |
|-------------------------|--|
| Resolution | 1...10000; (parameterisable; Factory setting: 1024) resolution |
| Communication interface | IO-Link |
| Shaft design | solid shaft |
| Shaft diameter [mm] | 6 |

Application

| | |
|--------------------|-------------|
| Function principle | incremental |
| Detection system | magnetic |

Electrical data

| | |
|------------------------------------|--------------|
| Operating voltage [V] | 4.75...30 DC |
| Current consumption [mA] | < 150 |
| Protection class | III |
| Reverse polarity protection | yes |
| Power-on delay time [s] | 0.5 |
| Max. revolution electrical [U/min] | 12000 |

Outputs

| | |
|------------------------------|------------------------------|
| Electrical design | HTL/TTL |
| Switching frequency [kHz] | 1000 |
| Factory setting | Output function: HTL (50 mA) |
| Short-circuit protection | yes |
| Phase difference A and B [°] | 90 |

Measuring/setting range

| | |
|------------|--|
| Resolution | 1...10000; (parameterisable; Factory setting: 1024) resolution |
|------------|--|

Accuracy / deviations

| | |
|--------------|-----|
| Accuracy [°] | 0.1 |
|--------------|-----|

Software / programming

| | |
|---------------------------|---|
| Parameter setting options | Resolution; direction of rotation; HTL; TTL |
|---------------------------|---|

RB3100



Incremental encoder with solid shaft

INCREMENTAL ENCODER BASIC LINE

| Interfaces | |
|------------------------------|-------------------|
| Communication interface | IO-Link |
| Transmission type | COM2 (38,4 kBaud) |
| IO-Link revision | 1.1 |
| SIO mode | yes |
| Min. process cycle time [ms] | 2.3 |


| Operating conditions | |
|--------------------------------|--|
| Ambient temperature [°C] | -40...85 |
| Storage temperature [°C] | -40...85 |
| Max. relative air humidity [%] | 95; (condensation not permissible) |
| Protection | IP 65; IP 66; (on the housing: IP 67; on the shaft: IP 64) |

| Tests / approvals | |
|----------------------|-------|
| Shock resistance | 100 g |
| Vibration resistance | 20 g |
| MTTF [years] | 292 |

| Mechanical data | |
|---|--|
| Weight [g] | 245 |
| Dimensions [mm] | Ø 36.5 / L = 65 |
| Materials | flange: aluminium; housing: stainless steel (1.4521 / 444) |
| Max. revolution, mechanical [U/min] | 12000 |
| Max. starting torque [Nm] | 1 |
| Reference temperature [°C] | 20 |
| Shaft design | solid shaft |
| Shaft diameter [mm] | 6 |
| Shaft material | stainless steel |
| Max. shaft load axial (at the shaft end) [N] | 10 |
| Max. shaft load radial (at the shaft end) [N] | 20 |

Electrical connection

Connector: 1 x M12, radial, can also be used axially; coding: A; Moulded body: stainless steel (316 / 1.4401); Maximum cable length: 100 m; (IO-Link: max. 20 m)



RB3100



Incremental encoder with solid shaft


INCREMENTAL ENCODER BASIC LINE

| IO-Link | |
|---------|----------------|
| 1 | L+ |
| 2 | not to be used |
| 3 | L- |
| 4 | IO-Link |
| 5 | not to be used |
| Screen | plug |

| encoder | |
|---------|--------------------|
| 1 | UB |
| 2 | A |
| 3 | GND |
| 4 | Z/0-Pulse (90 deg) |
| 5 | B |
| Screen | plug |

Diagrams and graphs

Pulse diagram

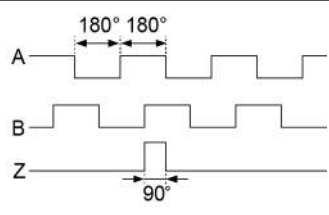

direction of rotation clockwise (looking at the shaft)