


PAGE 1/1	ISSUE 1337A	SERIES MML	PART NUMBER R302205002 XXX
----------	-------------	------------	-----------------------------------

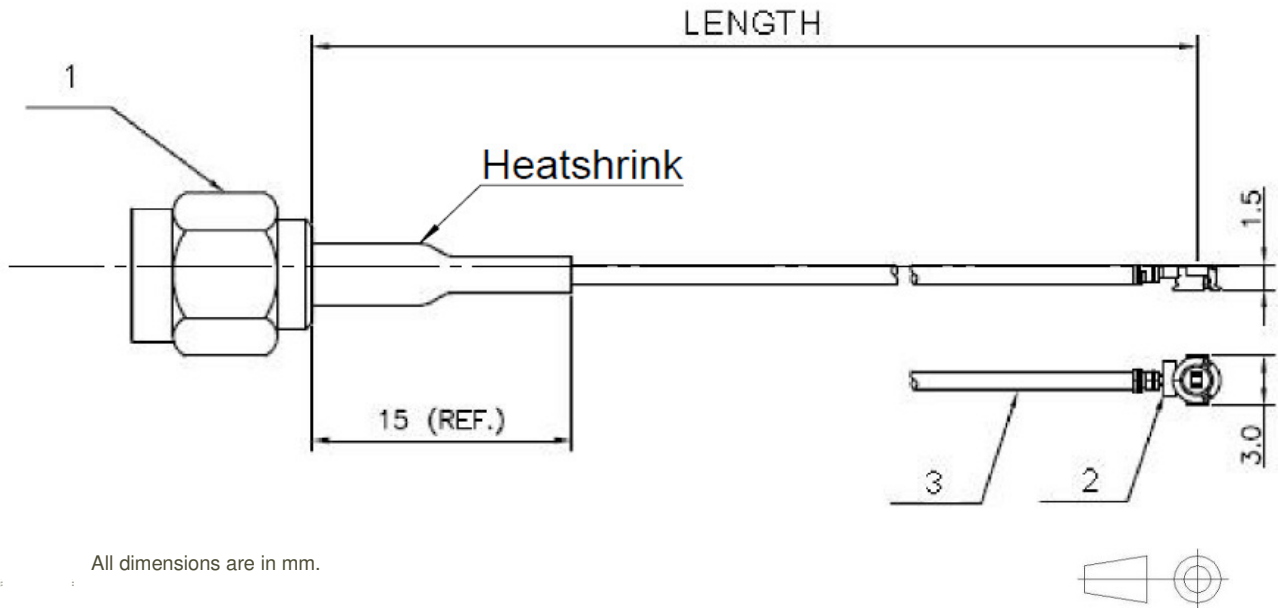

All dimensions are in mm.

- * 1 * Connector A : **SMA PLUG (gold plated)**
 - * 2 * Connector B : **MML PLUG (gold plated) H2.0**
 - * 3 * Cable : **1.13/50 S BLACK**
- Type


ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-6	GHz
Operating temperature	-40/+90	$^{\circ}$ C
VSWR	1.3 ** + 0.00	x F(GHz) Maxi
Insertion loss	0.92*	\sqrt{F} (GHz) dB Maxi
Voltage rating	250	Veff Maxi
Dielectric withstanding voltage	300	Veff mini
Insulation resistance	500	M Ω mini

SPECIFICATION

Weight	3.00*	g
Cable retention	4	N mini
Mating life	30	Cycles
Others	** VSWR up to 3GHz 1.3 max up to 6GHz 1.5 max	

Mating status

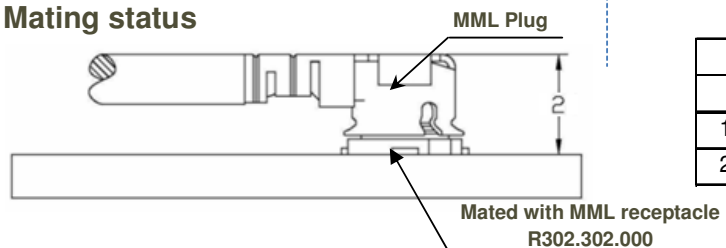

Length	*Insertion loss(Maxi)	*Weight(Maxi)
30 to 90	0.92 dB	3.00 g
100 to 200	1.44 dB	3.50 g
225 to 400	2.48 dB	4.00 g