
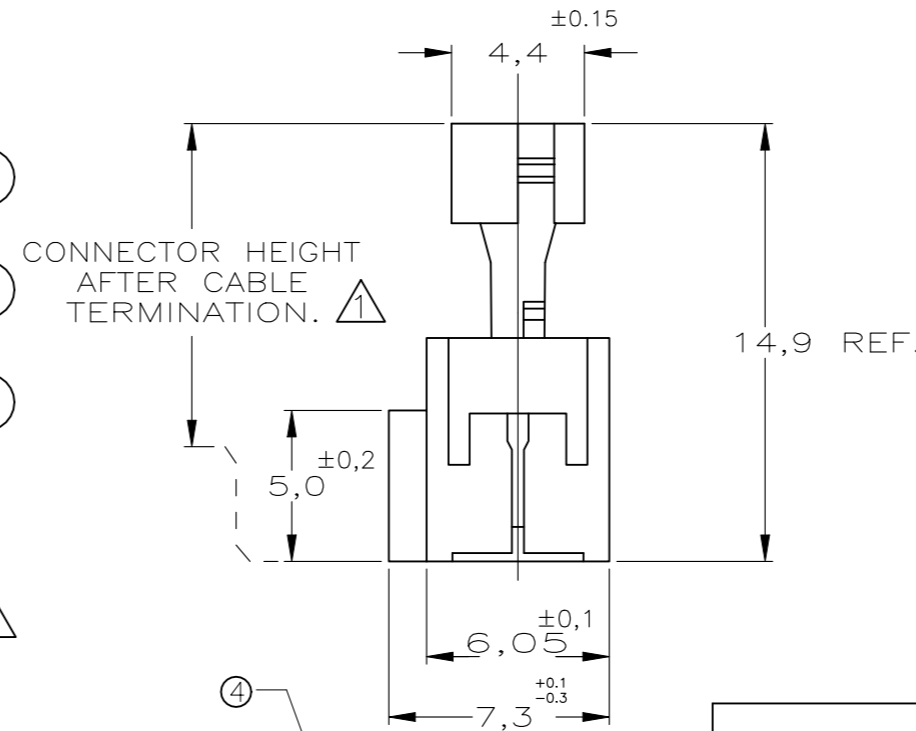
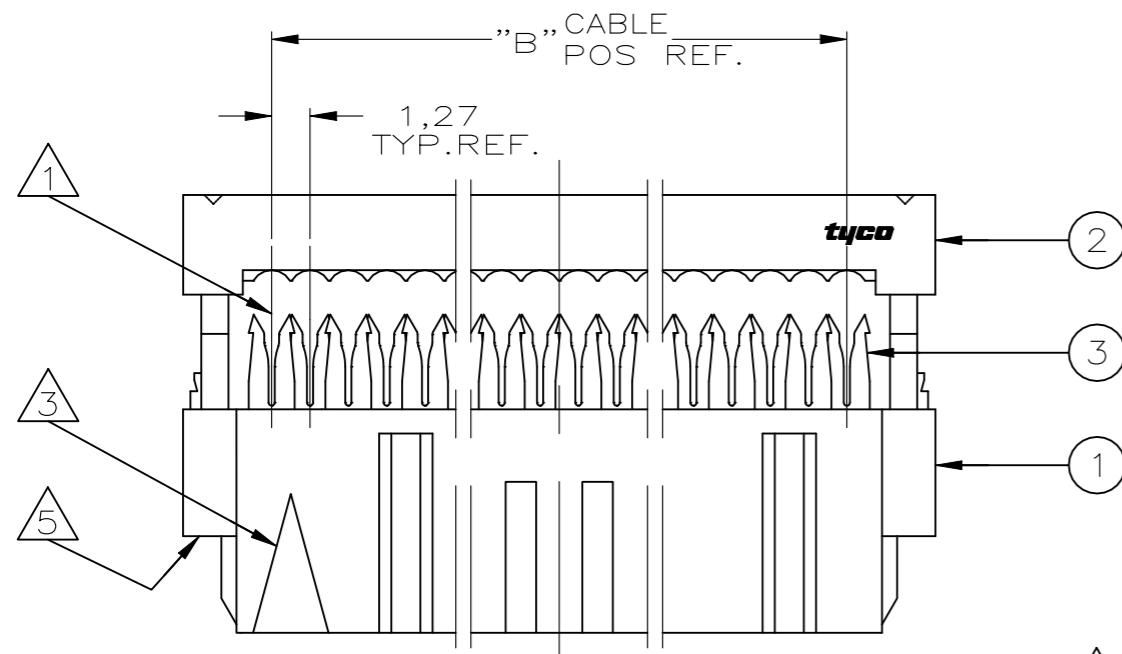




P	LTR	DESCRIPTION	DATE	DWN	APVD
E1	REVISED PER	ECR-21-115231	07JUN2023	GC	WH

NOTES:

- 1 CONNECTOR IS DESIGNED FOR FLAT RIBBON CABLE ON 1,27 CENTERS . FOR CABLE REQUIREMENTS SEE AMP APPLICATION SPECIFICATION 114-19022.
- 2 THESE RECEPTACLE CONNECTORS MATE WITH 0,64^{±0,05}mm SQUARE OR ROUND POSTS ON 2,54mm GRID.
- 3 MARK INDICATING FIRST CABLE POSITION REFERRING TO CONTACT POSITION.
- 4 THERE IS NO POLARIZATION-SLOT AT THIS END IN 4, 6, 8, 10 AND 14 POS CONNECTORS.
- 5 THESE CONNECTORS CAN BE USED IN CONJUNCTION WITH STRAIN-RELIEF COVERS OF PARTNR: 100103.
- 6 THERE IS NO POLARIZATION-SLOT AT THIS END IN 4, 6, AND 8 POS CONNECTORS.
- 7 PRODUCT SPECIFICATION 108-19033.

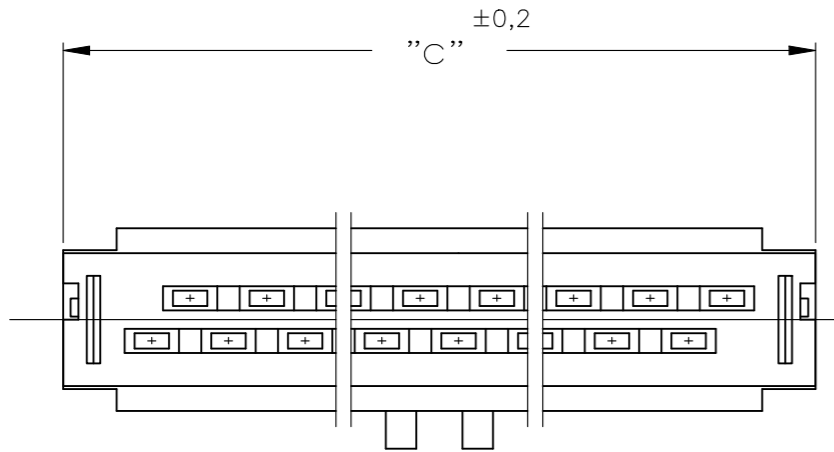

QUANTITY PER REEL	DIM. "C"	"B" CABLE POS.	"A" DUAL POS.	PARTNUMBER	PART REV.
1000	85,9	64	32	6-215919-4	D
1000	80,8	60	30	6-215919-0	D
1000	68,1	50	25	5-215919-0	D
1500	60,5	44	22	4-215919-4	D
1500	55,4	40	20	4-215919-0	D
1500	47,8	34	17	3-215919-4	D
1500	37,6	26	13	2-215919-6	D
1500	30,0	20	10	2-215919-0	D
1500	24,9	16	8	1-215919-6	D
1500	22,4	14	7	1-215919-4	D
1500	17,3	10	5	1-215919-0	D
OBSOLETE	1500	14,8	8	0-215919-8	C
1500	12,2	6	3	0-215919-6	D
OBSOLETE	1500	9,7	4	0-215919-4	C

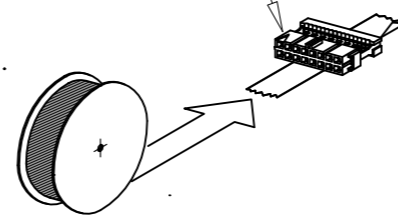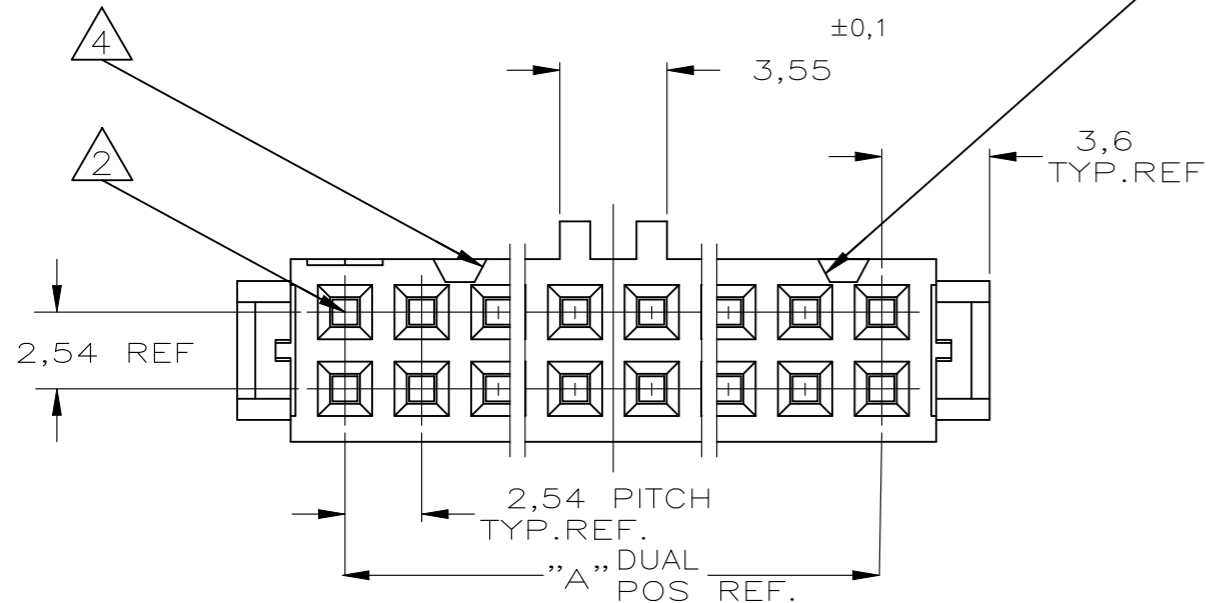

3	RECEPTACLE CONTACT	PHOSPHORBRONZE Cu Sn6	AT CONTACT-PLACE: 0,2 μ m GOLD AT WIRING END: 2,5 μ m TIN ENTIRE UNDERCOATING: 1,27 μ m NICKEL
2	COVER	THERMOPLASTIC POLYESTER GF UL 94 -V0	BLACK BK015 ONLY FOR REF.
1	HOUSING		
COMPONENT NAME		MATERIAL	PLATING / COLOUR

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	$\pm -$
1 PLC	$\pm -$
2 PLC	$\pm -$
3 PLC	$\pm -$
4 PLC	$\pm -$
ANGLES	$\pm -$
MATERIAL	FINISH
-	-

DWN	R.HOGEVEEN	02-02-88	TE Connectivity
CHK	R.VERSTIJNEN	03-02-88	
APVD	L.V.SOEST	03-02-88	
PRODUCT SPEC	NAME		
APPLICATION SPEC	AMP-LATCH MIL-TYPE REC. CONN. ASS'Y 14,9 PRE-ASM 0.2u Au-TAPE MOUNTED ON REEL		RESTRICTED TO
WEIGHT	-	SIZE	A300779
CUSTOMER DRAWING	SCALE	1:1	SHEET 1 OF 1
			REV E1