

Flush-type connector - SACC-DSI-M5FS-3CON-L180 - 1530647

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/actuator flush-type socket, 3-pos., M5, prewall/screw mounting, with straight solder connection



Key commercial data

| | |
|--------------------------------------|----------|
| Packing unit | 1 1 |
| Minimum order quantity | 20 1 |
| Weight per Piece (excluding packing) | 4.23 GRM |
| Custom tariff number | 85366990 |
| Country of origin | Germany |

Technical data

Ambient conditions

| | |
|---------------------------------|------------------|
| Ambient temperature (operation) | -25 °C ... 80 °C |
| Degree of protection | IP67 |

General

| | |
|------------------------|------------------------------|
| Rated current at 40°C | 1 A |
| Rated voltage | 60 V |
| Number of positions | 3 |
| Contact resistance | ≤ 3 mΩ |
| Insulation resistance | ≥ 100 MΩ |
| Coding | A - standard |
| Standards/regulations | M5 connector IEC 61076-2-105 |
| Status display | No |
| Surge voltage category | II |
| Pollution degree | 3 |
| Test voltage | 800 V |

Flush-type connector - SACC-DSI-M5FS-3CON-L180 - 1530647

Technical data

General

| | |
|-------------------|---|
| Connection method | Solder pins |
| Mounting type | Rear mounting M5 x 0.5 With locking nut |

Material

| | |
|---|---------------------|
| Inflammability class according to UL 94 | HB |
| Contact material | CuSn |
| Contact surface material | Au |
| Contact carrier material | PA 66 |
| Material, knurls | Nickel-plated brass |
| Sealing material | Viton |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140815 |
| eCl@ss 4.1 | 27140815 |
| eCl@ss 5.0 | 27143423 |
| eCl@ss 5.1 | 27143423 |
| eCl@ss 6.0 | 27143423 |
| eCl@ss 7.0 | 27449001 |
| eCl@ss 8.0 | 27449001 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001297 |
| ETIM 3.0 | EC002061 |
| ETIM 4.0 | EC002062 |
| ETIM 5.0 | EC002062 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |

Approvals

Approvals

Flush-type connector - SACC-DSI-M5FS-3CON-L180 - 1530647

Approvals

Approvals

GOST

Ex Approvals


Approvals submitted

Approval details




Drawings

Schematic diagram




Pin assignment M5 socket, 3-pos., D-coded, view female side

Dimensioned drawing




Drilling diagram



M5 flush-type socket

Dimensioned drawing

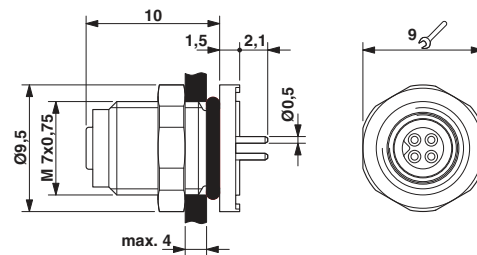

M5 flush-type socket