



### Electrical specifications

**Passband:** 910-920 MHz  
**Insertion loss (CF):**  $\leq 1.5$  dB  
**Insertion loss all bands:**  $\leq$  dB  
**Return loss:**  $\geq 16$  dB  
**Out of band Rejection 1:** 75 dB@850-894 MHz  
**Out of band Rejection 2:** 75 dB@929-950 MHz  
**Power Handling :** 20 Watts


### Mechanical

**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** N Female  
**Dimensions:** 140 X 80 X 53 mm

### Environmental

**Operating Temperature:** -45 to +85° C  
**Storage Temperature:** -55 to +95° C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5 to 200 MHz

### Outline Drawing:

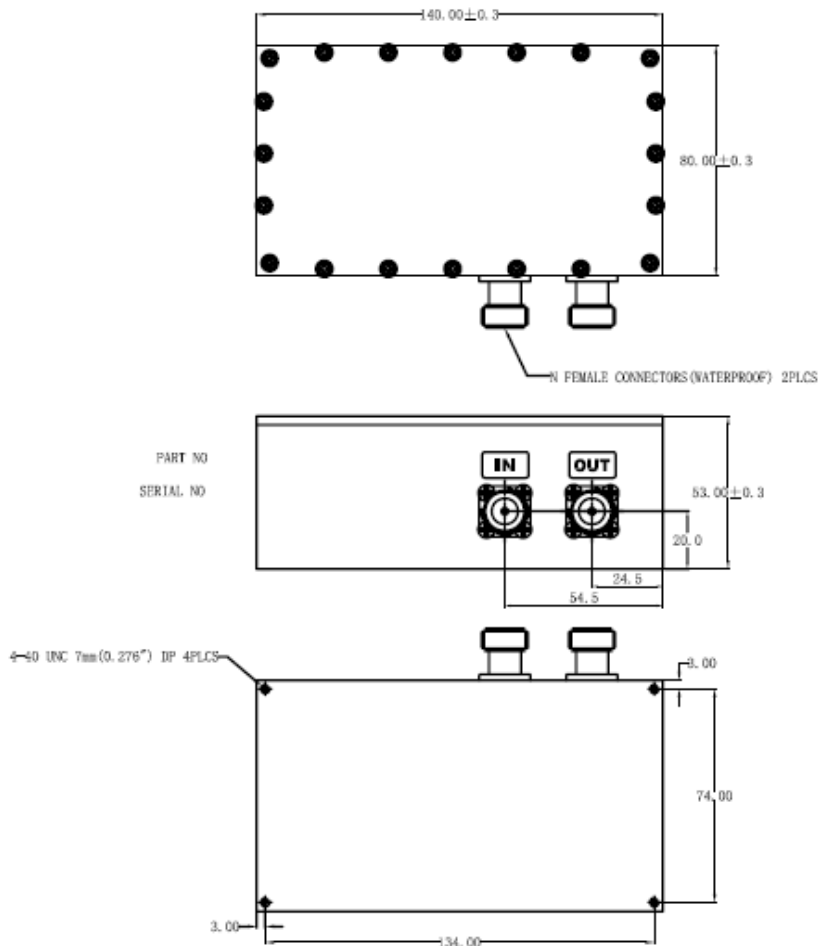



### Plot:

