
-		 		
	دی ا	 111	0	0





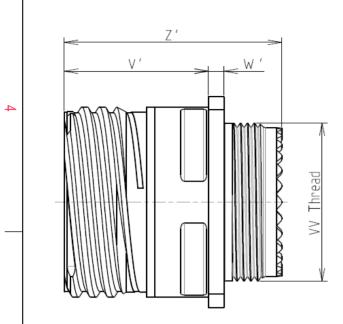

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite
	-Shell Plating	: Nickel
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum
	-Durability	: 500 Mating cycles
	-Delivered with Souria	u contacts and Accessories
	-Temperature Range	65°C to +200°C
	-Salt Spray	: 2000 hours
	-Mass	: 12.8 g ± 10%

8D 0

G

11

Μ

99


S

F

С

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M15x1-6g

Е

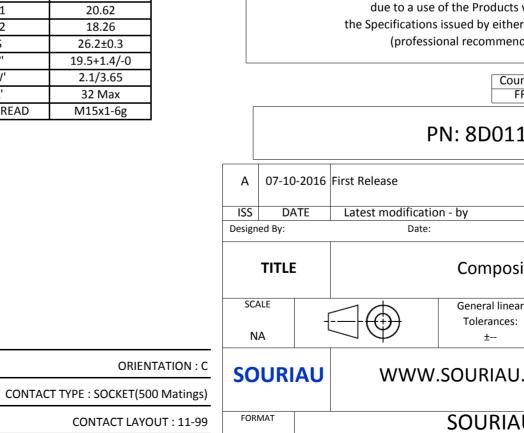

A3

D

0		ω		A		_
						4
LAY	OUT SHOWN AS EXA	AMPLE				3
due to a use the Specifications	not be liable for any of the Products which issued by either of t onal recommendation Country FR	ch does not co the Parties or b on, technical n	mply with by a third party			2
	N: 8D011N	199SC				-
st Release	n hu					
Latest modificatio Date:	iii - Dy		CUSTOMER	DRAWING	MOD N°	
	Composite	Receptacl	e 8D serie	25		
$] \bigoplus$	General linear Tolerances: ±		NPRDS / 85			1
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	SOURIAU 8D011M9				SHEET	
С		B		A	-, -	J
~		_				

		۵	нт — — — — — — — — — — — — — — — — — — —	m	D	0
		Contact Layout				Panel Cutout
4	-×($ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & & \\ & $			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Cont positi ID A B C D E F G Shell Arrangement Numb	X-axis (mm) Y-axis (mm) +.065 (1.65) +.113 (2.87) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 0065 (1.65) +.100 (0.00)	1		¥ 22 -	
ယ	size no. cont 11 -99 7					Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
Ю						Country FR
					A 07-10-201	PN: 8D011N
	-				ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Composite
<u> </u>					SCALE NA	General linear Tolerances: ±
					SOURIAL	
					FORMAT A3	SOURIAU 8D011M9
	Н	G	F	E	D	C

