




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS




P	LTR	DESCRIPTION	DATE	DWN	APVD
A		INITIAL	07Jan2015	GY	CW
B		ECR-15-013759	130c+2015	DW	CW
C		ECR-21-106515	23JUL2021	SQ	CW

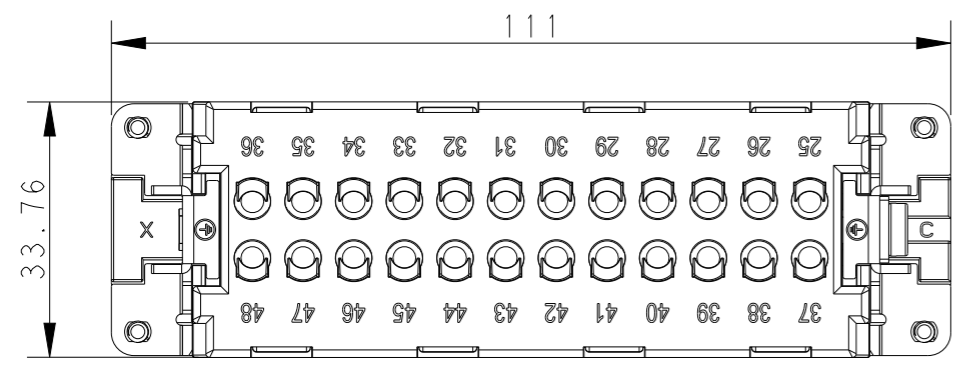

M4 screw, recommended tightening torque 1.2Nm

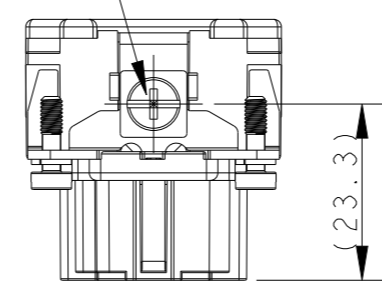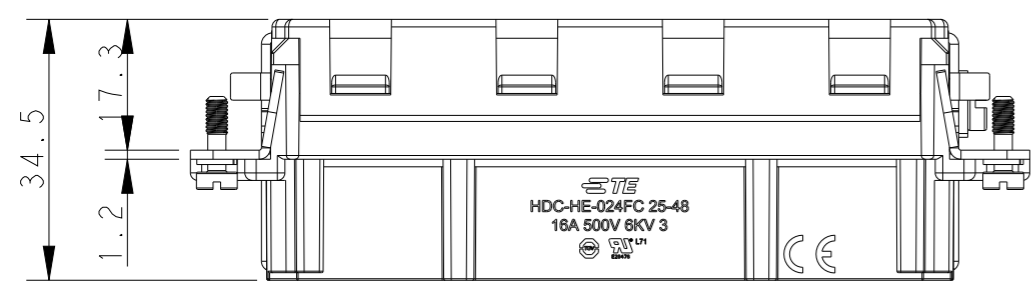

4 X M3 screw, recommended tightening torque 0.5Nm

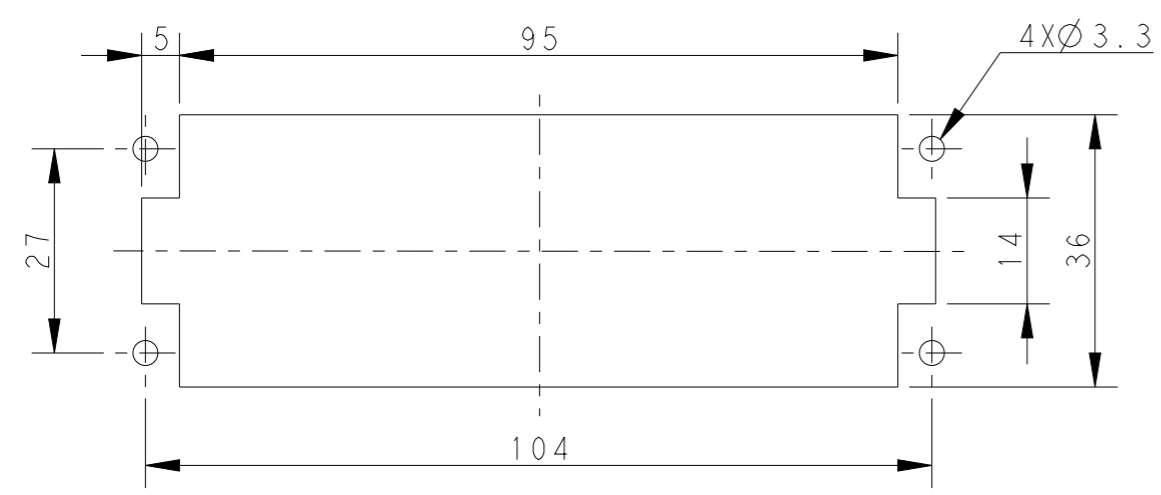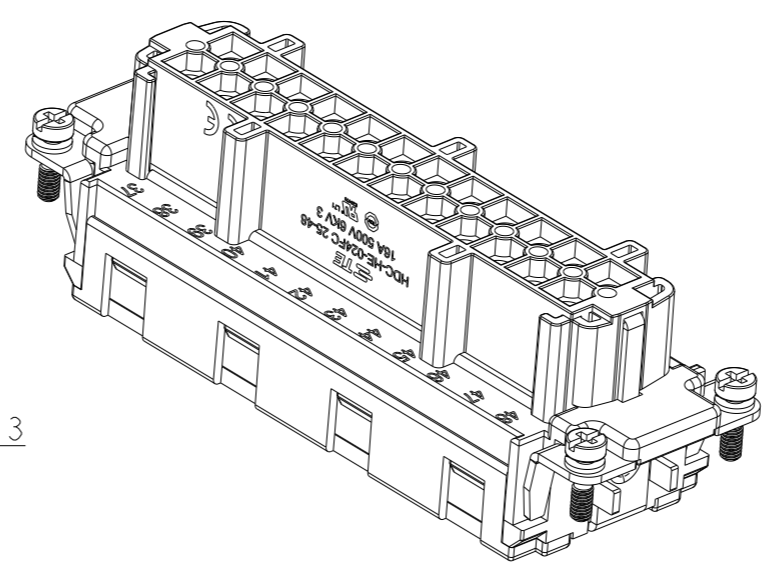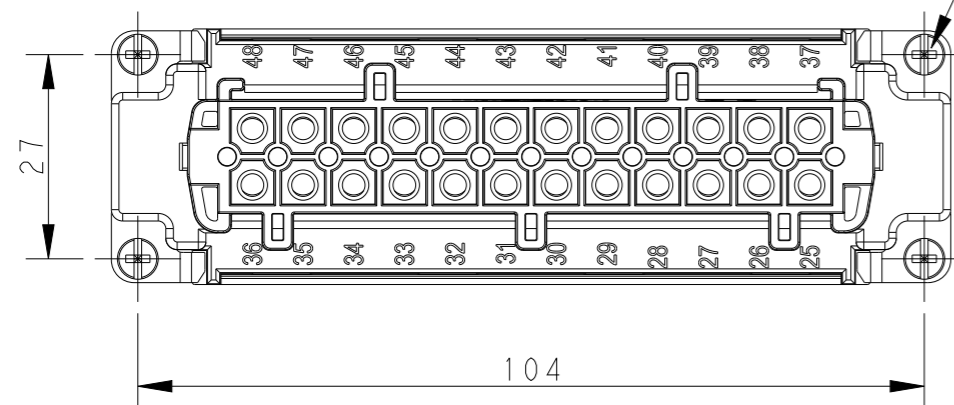

Panel cut out for inserts for using without hoods/housings

NOTES:

- TECHNICAL CHARACTERISTICS:
 INSULATION MATERIAL: PC
 RATED VOLTAGE: 500V
 RATED CURRENT: 16A
 INSULATION RESISTANCE: $\geq 400M\Omega$
 RATED IMPULSE VOLTAGE: 6KV
 POLLUTION DEGREE: 3
 FLAMMABILITY: UL94V-0
 MATING CYCLES: 500 CYCLES
 OPERATION TEMPERATURE: $-40^{\circ}C \sim +125^{\circ}C$
 WIRE RANGE: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
 CONTACT TYPE: CRIMP CONTACT
- CONTACTS NEED TO BE ORDERED SEPARATELY.
 (ORDER No. REFER TO DRAWING: T20300X20XX000)

注释:

- 技术参数:
 绝缘材料: PC
 额定电压: 500V
 额定电流: 16A
 绝缘电阻: $\geq 400M\Omega$
 脉冲电压: 6KV
 污染等级: 3
 阻燃等级: UL94V-0
 插拔次数: 500次
 工作温度: $-40^{\circ}C \sim +125^{\circ}C$
 接线范围: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
 接线类型: 冷压接
- 端子需要单独订购。
 (订货号参考图面: T20300X20XX000)

HE-024-FC 25-48	T2040484201-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Gino.Yao	05Jan2015
		CHK	Chris.Wang	05Jan2015
		APVD	Xiang.Xu	05Jan2015
		PRODUCT SPEC	114-137044	
		APPLICATION SPEC	114-137044	
MATERIAL		WEIGHT	-	
CUSTOMER DRAWING				

		TE Connectivity	
		NAME: HE-024-FC 25-48	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	©-T2040484201000	-
SCALE		SHEET	REV
1:2		1 OF 1	C