


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

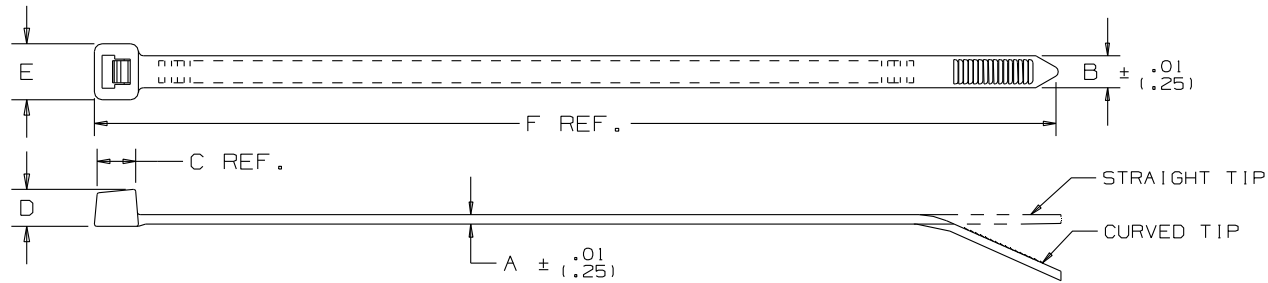

PANDUIT PART NO. *	BUNDLE DIA.		A	B	C	D	E	F	MIN. LOOP TENSILE lbs. (N)	CROSS ** SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT1M-60	.06 (1.5)	.87 (22)	.043 (1.1)	.098 (2.5)	.170 (4.3)	.154 (3.9)	.188 (4.8)	3.9 (99)	18 (80)	M	CURVED	.07 (32)
PLT2S-60	.06 (1.5)	1.88 (48)	.052 (1.3)	.190 (4.8)	.260 (6.6)	.220 (5.6)	.320 (8.1)	7.4 (188)	50 (222)	S	CURVED	.29 (132)

NOTES:

- *1) SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- **2) CABLE TIE CROSS-SECTION CODE: M=MINIATURE, I=INTERMEDIATE, S=STANDARD & H=HEAVY.
- 3) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 248°F (120°C).
- 4) MATERIAL FLAMMABILITY RATING: UL94V-0.
- 5) MINIMUM LOOP TENSILE RATING AT 120°F (49°C)/20% RH.
- 6) COLOR: BLACK

W10001EF/01-SS-26944_05.PRT

CAD FILENAME/LAYERS
DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS

PAN-TY CABLE TIES
BLACK FLAME RETARDANT
-60 SERIES

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± .005 (.XXX) ± .020(.51)
(.XX) ± .02(.5) ANGLES ± .005

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
5	11/15/11	JABO	TGS	CORRECTED BUNDLE DIA MAX, & 'C' DIM OF PLT2S	SS-26944	5	TGS	
4	8/9/11	JABO	TGS	CORRECTED 'F' DIMENSION OF PLT1M-60	SS-26944	4	TGS	
---	----	---	---	REVISED NOTE 1 "SEE CURRENT PRICE SHEET..." TO "SEE www.panduit.com ..."	----	---	---	

DRAWN BY
KET
DATE
2-3-95
CHK'D
HVP

MAT'L:
BLACK
FLAME RETARDANT
NYLON 6.6

SCALE
NONE
DRAWING NO.
SS-26944

DWG
A
SIZE