

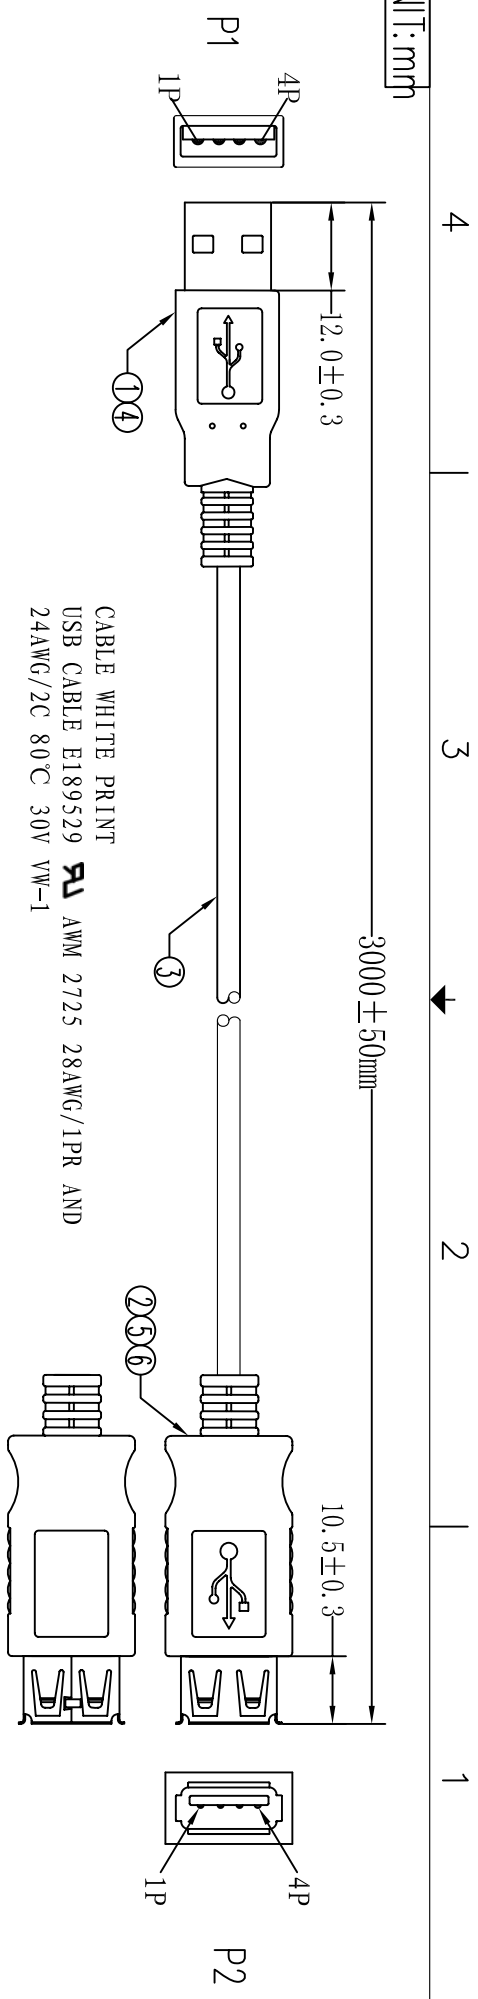


UNIT: mm

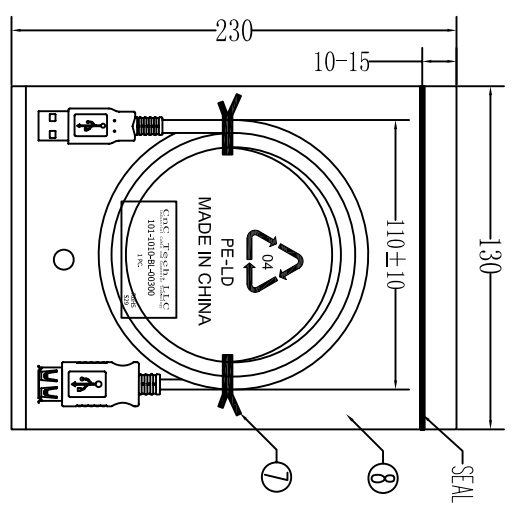

CABLE WHITE PRINT
 USB CABLE E189529
 24AWG/2C 80°C 30V VW-1
 AWM 2725 28AWG/1PR AND

PIN ASSIGNMENT:

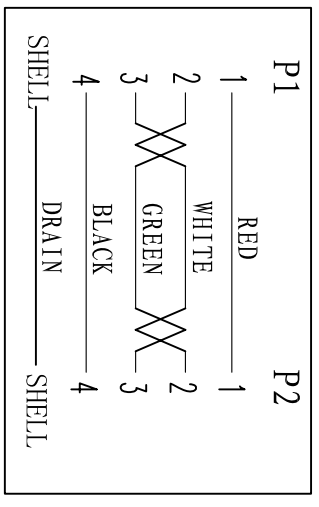

1PC/PE BAG

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 10Mohm(min)
 4. dielectric test: DC 300V

| | | | |
|-----|------------|------|--|
| ⑨ | PE BAG | 1/10 | CLEAR SIZE: 280*330*0.05mm PRINT BLACK "MADE IN CHINA" + "10PCS". |
| ⑧ | PE BAG | 1 | CLEAR SIZE: 130*230*0.05mm PRINT BLACK "MADE IN CHINA" + "1PC". |
| ⑦ | TIE | 2 | BLACK L=100mm |
| ⑥ | IN JACKET | 3g | CLEAR LDPE (MOULD NO: NM-027) |
| ⑤ | OUT JACKET | 7g | BLACK PVC-40P (MOULD NO: WM-83) |
| ④ | OUT JACKET | 6g | BLACK PVC-40P (MOULD NO: WM-40) |
| ③ | CABLE | 1 | BLACK USB1. 1 U12725 28#/1P+24#/2C+AEB OD: 4.7mm L=3000±10mm |
| ② | CONN | 1 | USB A FEMALE SHELL: NICKEL PIN G/F SHORT TYPE INSULATOR COLOR: WHITE |
| ① | CONN | 1set | USB A MALE SHELL: NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE |
| NO. | NAME | QTY | SPECIFICATION |

CNC Tech, LLC
 Industrial Cable and Connector Technology

| | | | |
|------------------|------|------------|-------------------|
| DRAWN | Andy | DRAWING NO | VG/LJQ-094-009-A |
| CHECKED | | CUSTOMER | |
| APPROVAL | | ITEM NO. | 101-1010-BL-00300 |
| DECIDED | | DATE | 2013-8-23 |
| VERSIONS/EDITION | A/0 | PROJECTION | |