
S22F1C-P19MFD0-350S

series_f, type_s2



General information

Part number	S22F1C-P19MFD0-350S	
Termination	solder	
Size	2	
Locking principle	push	CETHWELD
Coding	1_halfshell	
Cable Diameter	cable_mini_35	
Cable outlet	bend_relief	

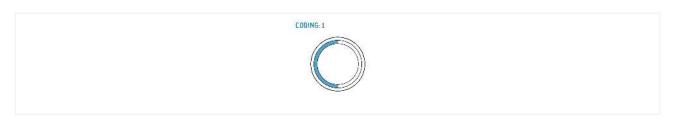

Contact insert description

Number of contacts	19
Contact type	pins
Contact diameter	07mm
Insulator material	peek
Wire cross section	26_awg
Termination	solder
Termination diameter	06mm

reverse_gender_on_request

Technical information

Max. creepage and air clearance distance	07 __ mm	06_mm
Nominal current single contact	06_a	iec_60512_5_2
Nominal current insert	2,7 A	vde_0298_4
Test voltage	1_kv_ac	sae_13441
safety_text		

Mechanical and environmental data

Degree of protection*	ip50	
Operating temperature	40_120_c	
Mating cycles	5000	
mated unmated		

Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

safety_text_2 ul_text illustrative_text