




P0K1.281.6W.B.007

Platinum sensor with round ceramic housing For medium temperatures

Benefits & Characteristics

- Same dimensions as a traditional wire wound sensor - easy interchangeability into existing applications
- Easy to assemble (boreholes etc.)
- Excellent long-term stability
- Vibration and temperature shock resistant (depending on assembly)
- Fast response time (depending on assembly)
- Low self-heating

Illustration

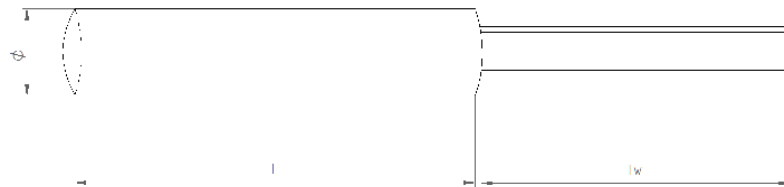

Technical Data

Operating temperature range:	-200 °C to +600 °C	
Nominal resistance:*	100 Ω at 0 °C	
Characteristics curve:*	3850 ppm/K	
Long-term stability:	< 0.04 % at 1000 h at maximal operating temperature	
Tolerance class (dependent on temperature range):*	IEC 60751 F0.3	B (IST AG reference)
Connection:*	Pt-cladded Ni-wire, Ø 0.2 mm (solderable, weldable, crimpable, brazeable), 7 mm long	
Recommended applied current: ²⁾	1 mA at 100 Ω	
²⁾ Self-heating must be considered		
Dimensions:	2.8 x 13.0	
Tolerance (chip):	Ø ±0.2 mm, L ±1 mm, L _W (up to 30 mm) ±1 mm	

Product Photo





Order Information

Description:	Item number:	Former main reference:
P0K1.281.6W.B.007.R	100372	010.00478

Additional Documents

Application Note:	Document name:
	ATP_E



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: info@ist-ag.com | www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved