
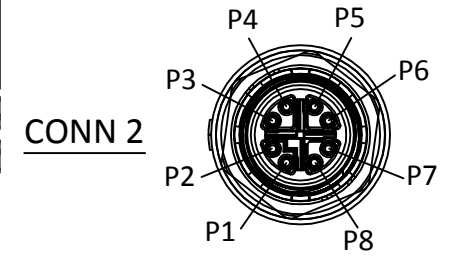
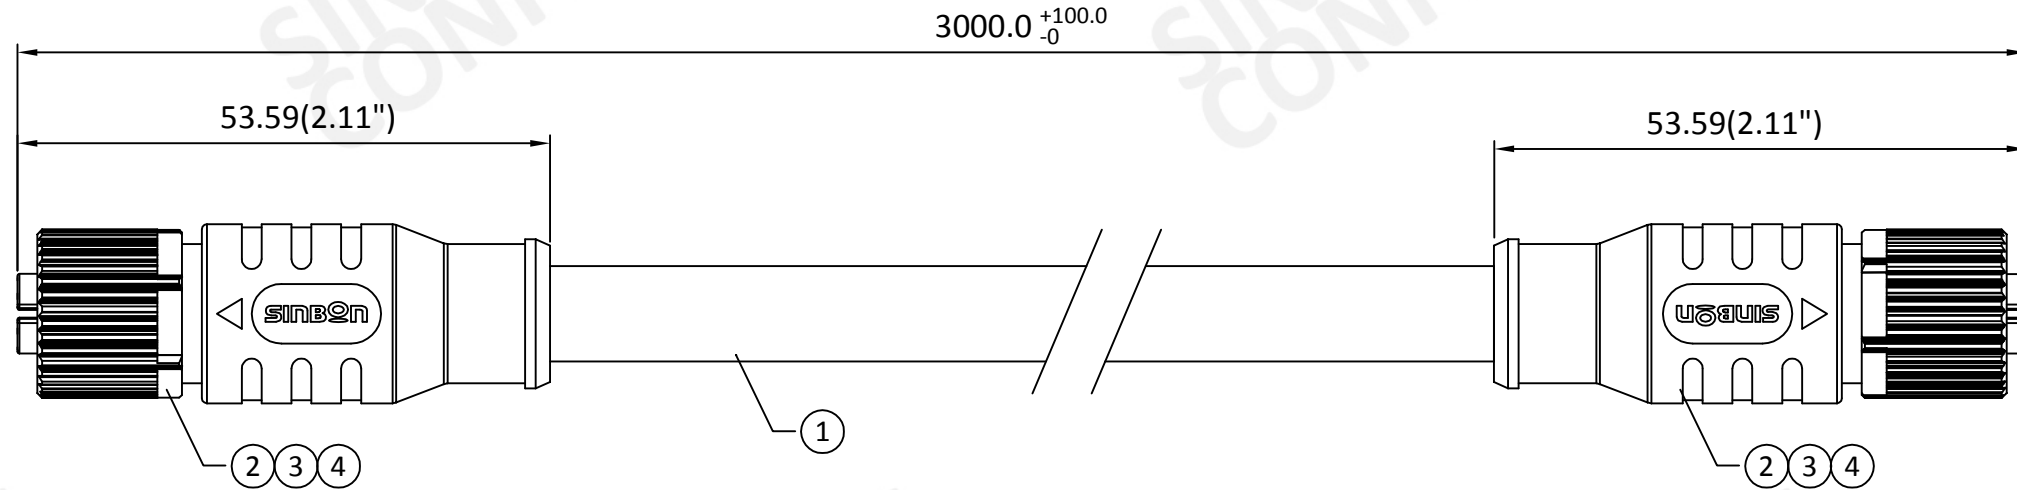


1	2	3	4	5	6	7	8
MOLD TYPE	MOLD NO.	ITEM					
CONN1 OVERMOLD	CPO0241	3,4					

REV.	ECN NO.	DATE	BY	DESCRIPTION
01		Sep/03/2020	Aine Li	RELEASED

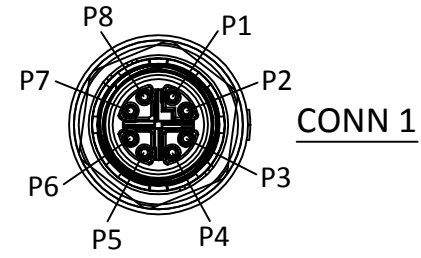

WIRE RUN LIST				
AWG	CONN 1		COLOR	CONN 2
24	1	○	WHITE/ORANGE	1
	2	○○	ORANGE	2
	3	○○○	WHITE/GREEN	3
	4	○○○○	GREEN	4
	5	○○○○○	WHITE/BROWN	5
	6	○○○○○○	BROWN	6
	7	○○○○○○○	WHITE/BLUE	7
	8	○○○○○○○○	BLUE	8

- NOTES:
- TESTING SPEC.:
COND. RESISTANCE: 3Ω MAX.
INSUL. RESISTANCE: 10MΩ MIN.
TESTING VOLTAGE: 300V DC
 - IP67 WHEN MATED.
 - FOLLOW IPC620 CLASS II STANDARD TO ASSEMBLY AND INSPECTION.
 - RoHS COMPLIANCE.

4.	A/R	TPU, SHORE A 78, NATURAL, HF (A51100057001SD)
3.	A/R	PLASTIC MASTERBATCH, BLACK, FORTPU (A88270010001SD)
2.	1	I/O CONN., FEMALE, 8P (A30150225001SD)
1.	A/R	CABLE, CAT.6, UTP PATCH CABLE, #24*4P, OD=5.6
ITEM	QTY	DESCRIPTION

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE PROPERTY OF SINBON ELECTRONICS CO., LTD. IT MAY NOT BE USED OR ITS CONTENTS COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT AND IS TO BE RETURNED PROMPTLY UPON REQUEST BY SINBON ELECTRONICS CO., LTD.

CUSTOMER : DigiKey		 SINBON Electronics Co., Ltd.	
CUSTOMER P/N : N/A	REV. N/A		
UNLESS OTHERWISE SPECIFIED TOLERANCE :		DESCRIPTION : 8P F-F X code anti-vibe IP67, 3M	
1 ~ 10 : ±1	DRA. Sep/03/2020	PART NUMBER : M12X-08CFS00-UL24N30	
11 ~ 30 : ±2	CHK. Aine Li	REV. 01	
31 ~ 50 : ±3	APR. Sep/03/2020	SIZE UNIT SCALE SHEET	
51 ~ 200 : ±5	Kevin Qiu	A3 mm NONE 1 of 1	
201 ~ 400 : ±7	APR. Sep/03/2020		
> 401 : ±10	Kevin Qiu		
ANGLES : ±1°			