



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00400	Connector, stereo plug, 2.5xL19.6 mm, brass, nickel plated, molding style	1	
2	30-00179	Wire, 3C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC	1	
3	24-00028	Overmold, PVC, black	1	black

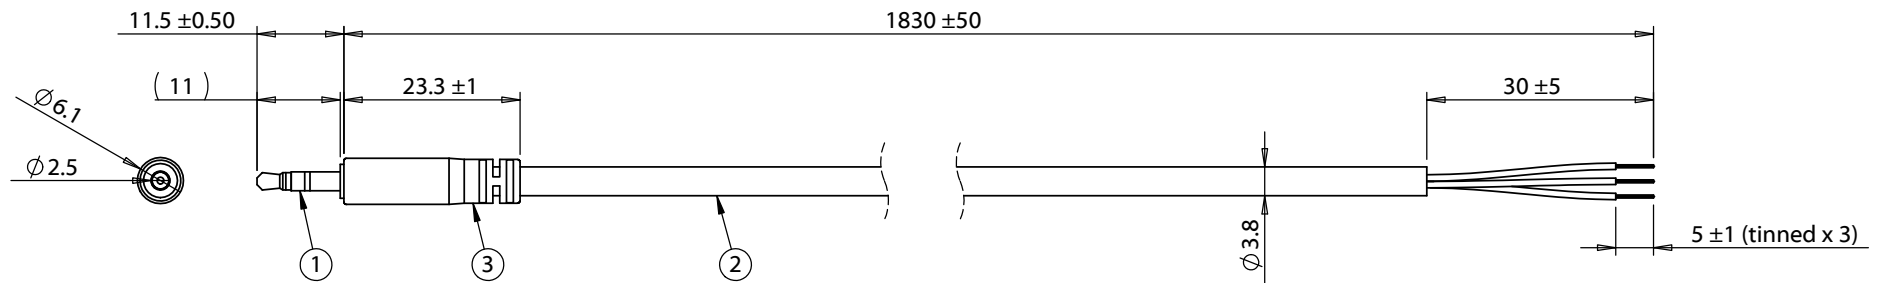

Wiring Diagram	
50-00400	wire color
A	red
B	white
C	green

Notes:
 Cables individually tied and bundled in groups of 10
 Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>	
A2	3/28/2012	Changed wire part number	GL Digitally signed by GL Date: 2016.10.28 13:59:09 -07'00'	RoHS compliant		
A3	9/17/2012	Changed connector to 50-00252	Verified: DN Digitally signed by DN Date: 2016.10.28 15:23:53 -07'00'	Function test: no open, no short circuit, no intermittent		
A4	4/17/2013	Changed connector to 50-00349	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:		
A5	10/9/2014	Changed connector to 50-00400		Cable, 1830 mm, 2.5 mm 50-00400 slim stereo plug to 5 mm tinned, 28 AWG, 30-00179, shielded		Size: Part number: A 10-00342
A6	10/28/2016	Corrected overmold dimensions		Scale: 1:5		Sheet 1 of 1