



Product Name: NB26DG Antenna Module

Part Number: H2M1W021129900

Features:

- Supporting: (L1+L5) GPS/GLONASS
- Stable and reliable in performances
- Low temperature coefficient of frequency
- RoHS & REACH Compliant
- Pre-filtering

Applications:

- Navigation systems or position tracking systems
- Car Navigation
- Security Surveillance

Antenna Module

MODEL: NB26DG

Version: Preliminary

I. Patch antenna Specifications:

Items	Specifications		
Navigation	L1 Band		L5 Band
Center Frequency (MHz)	1575.42	1602	1176.45
Return loss (dB)	<-10 Typ.	<-10 Typ.	<-10 Typ.
Efficiency (%)	23 Typ.	29 Typ.	25 Typ.
Average Gain (dB)	-6.4 Typ.	-5.4 Typ.	-5.9 Typ.
Peak Gain (dBi)	0.6 Typ.	1.3 Typ.	-0.8 Typ.
Polarization	RHCP		
Impedance (Ω)	50		


II. Low noise amplifier Specifications:

Items	Specifications		
Navigation	L1 Band		L5 Band
Center Frequency (MHz)	1575.42	1602	1176.45
Gain (dB)	28 \pm 3 Typ.	28 \pm 3 Typ.	28 \pm 3 Typ.
Noise Figure (dB)	3.0 Typ.	3.0 Typ.	3.0 Typ.
Input Voltage (V)	DC = 3.0 \pm 0.3		
Current (mA)	12.5 Typ. (at DC 3V)		
Impedance (Ω)	50		

Environmental Conditions	
Operation & Storage Temperature ($^{\circ}$ C)	-40 ~ +85
Storage Temperature ($^{\circ}$ C) (Antenna with packing sealed)	-5 ~ +40
Relative Humidity	10 ~ 70 %

© Unictron Technologies Corp.
All specifications subject to change without notice.

III. Antenna Dimensions (unit: mm):

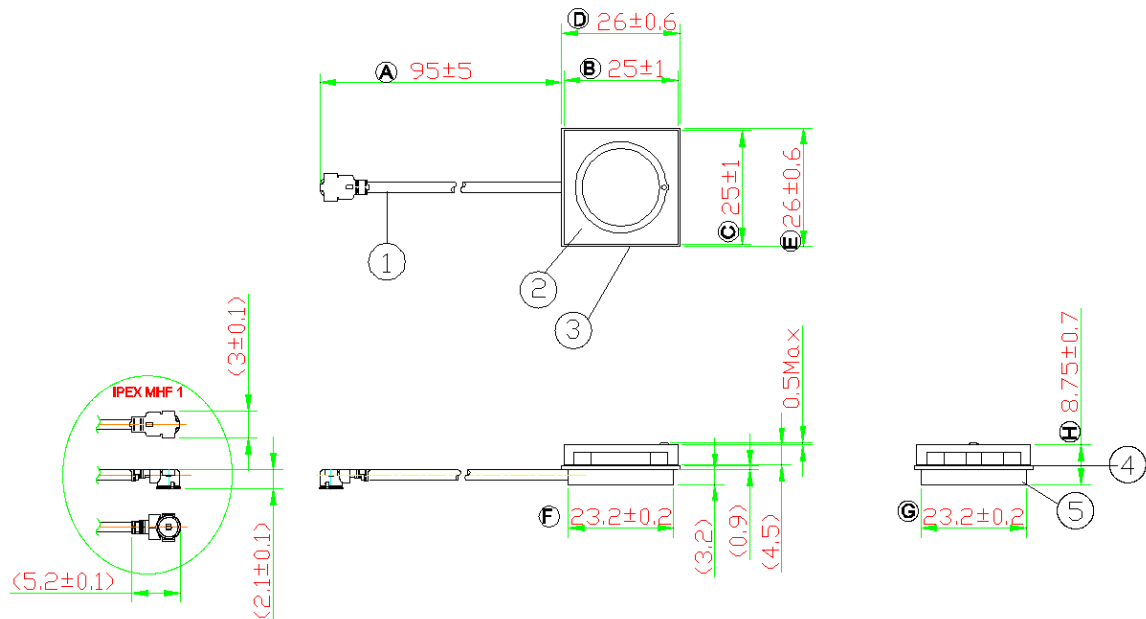

© Unictron Technologies Corp.
All specifications subject to change without notice.

NOTE:


1. All materials are RoHS 2.0 compliant.
2. "A~H" Critical Dimensions.
3. "()" Reference Dimensions.

Item	Name	Material	Color	Q'ty
1	Connector (IPEX I)+cable($\phi=1.13\text{mm}$)	Brass/FEP	Gold/gray	1
2	Patch	Ceramic	-	1
3	LNA Module	FR4	Green	1
4	Adhesive	-	-	1
5	Shielding Case	Tin (SPTE)	-	1


IV. Properties:

a) Return loss (dB)

L1 Band (1575.42 MHz & 1602 MHz)

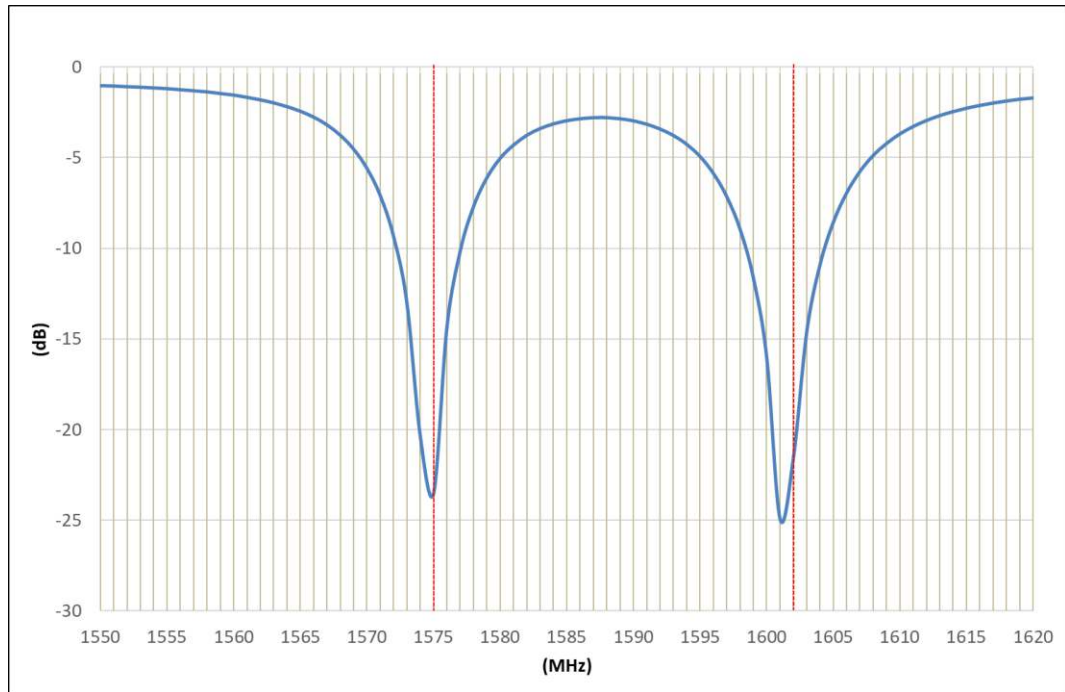


L5 Band (1176.45 MHz)

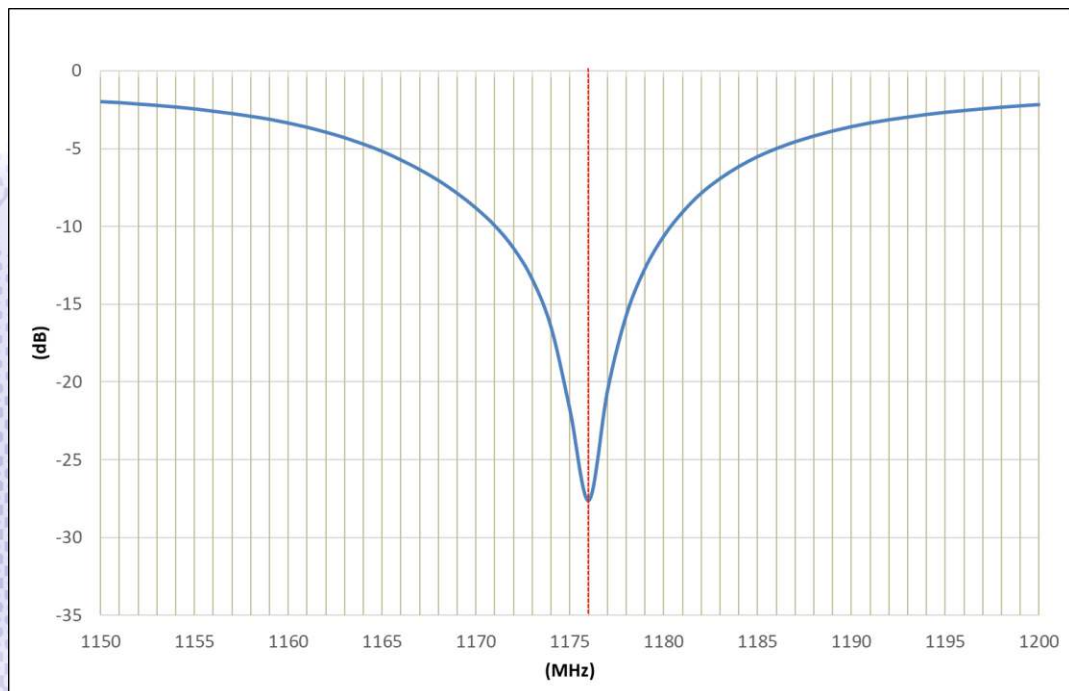


b) Efficiency (%)

L1 Band (1575.42 MHz & 1602 MHz)

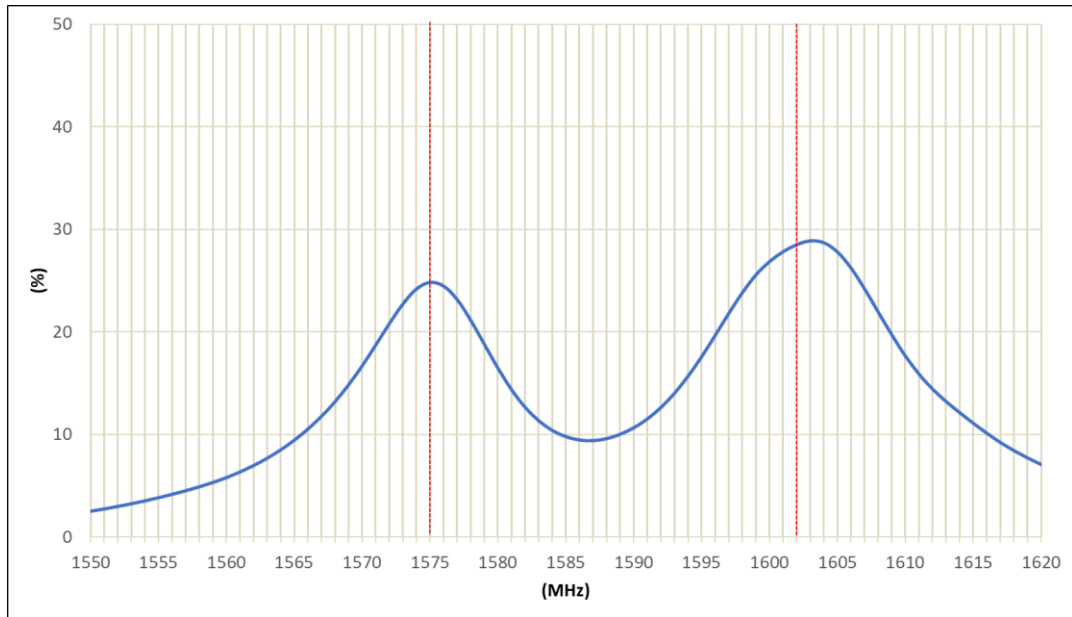


L5 Band (1176.45 MHz)

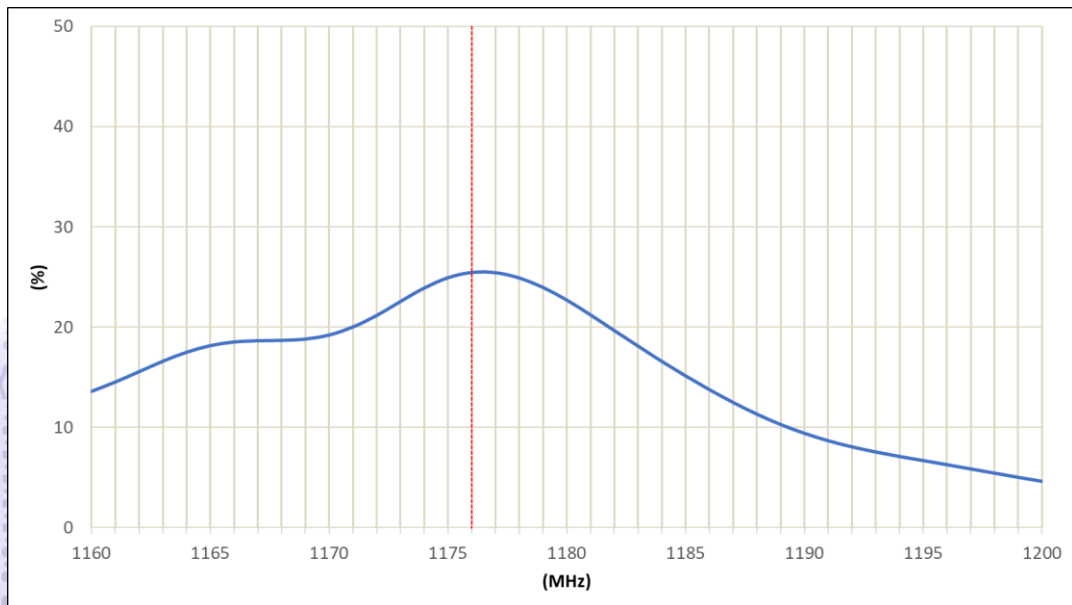


© Unictron Technologies Corp.
All specifications subject to change without notice.

c) Average Gain (dB)

L1 Band (1575.42 MHz & 1602 MHz)

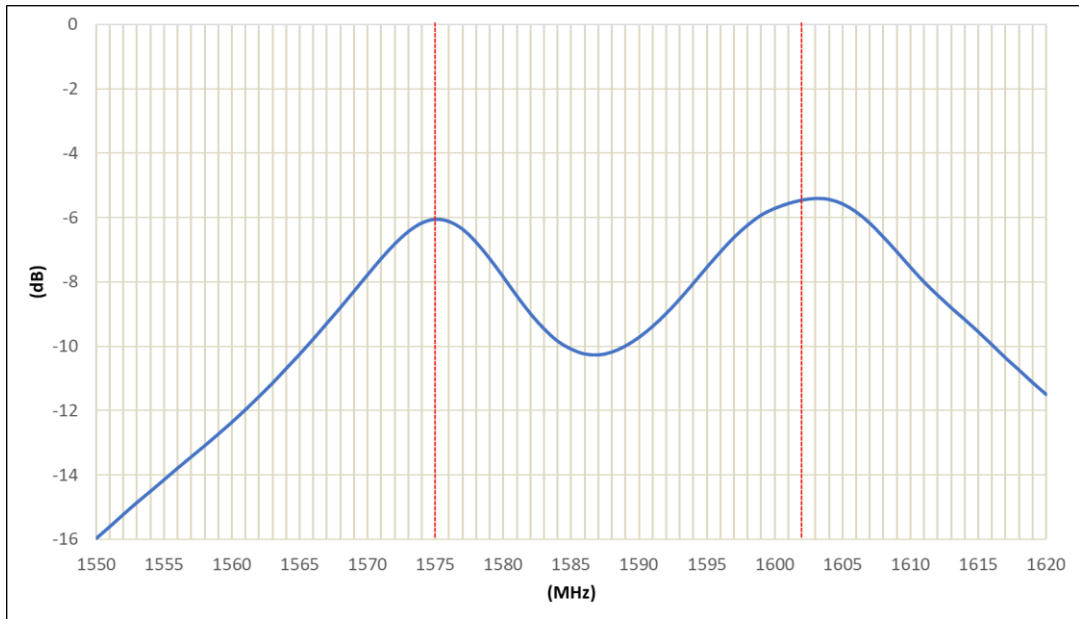

L5 Band (1176.45 MHz)

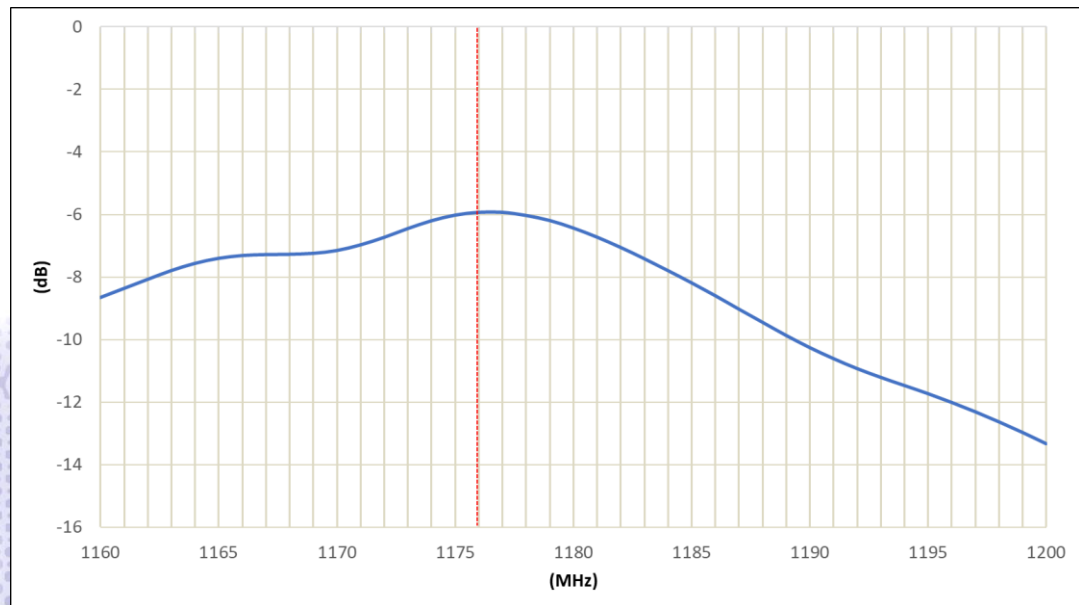


© Unictron Technologies Corp.
All specifications subject to change without notice.

d) Peak Gain (dBi)

L1 Band (1575.42 MHz & 1602 MHz)



L5 Band (1176.45 MHz)

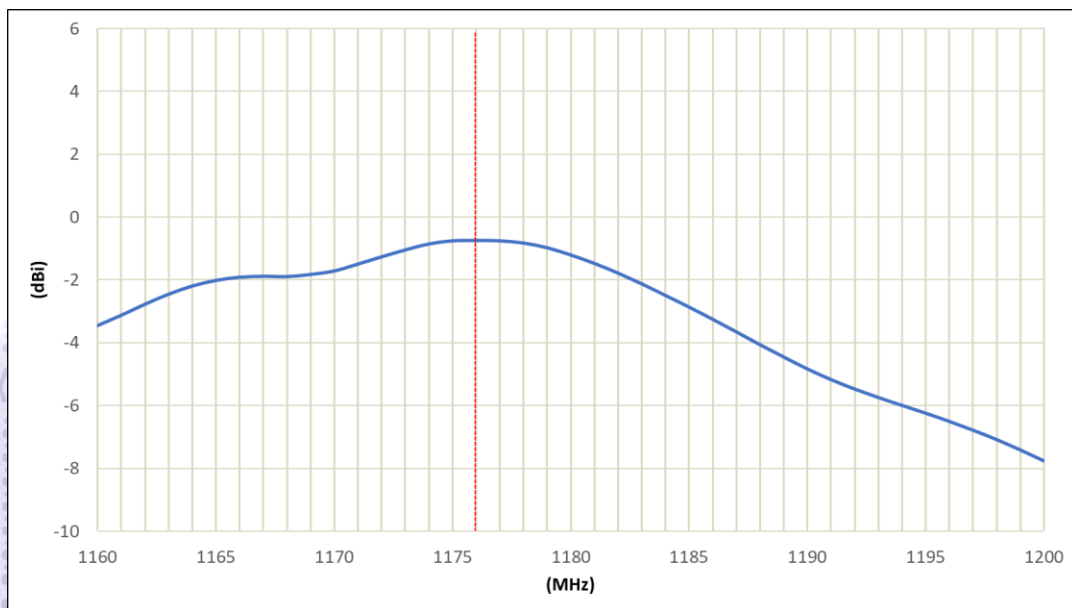

© Unictron Technologies Corp.
All specifications subject to change without notice.


V. Antenna Radiation Pattern Measurement:

The antenna radiation patterns are measured in Unictron's 3D Anechoic Chamber. The measurement setup is as show below.





© Unictron Technologies Corp.
All specifications subject to change without notice.

3D Radiation Gain Pattern

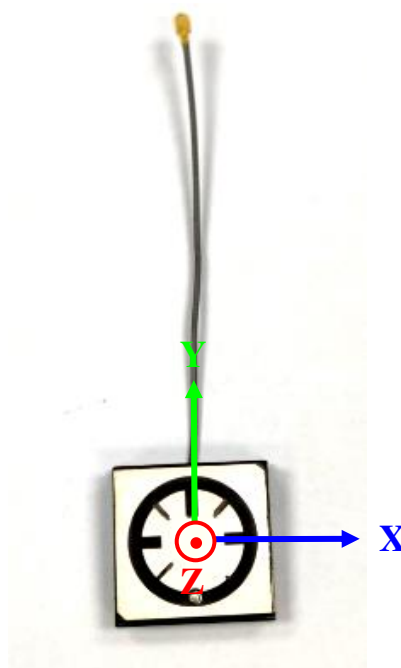


a) 1575.42 MHz (unit: dBi)

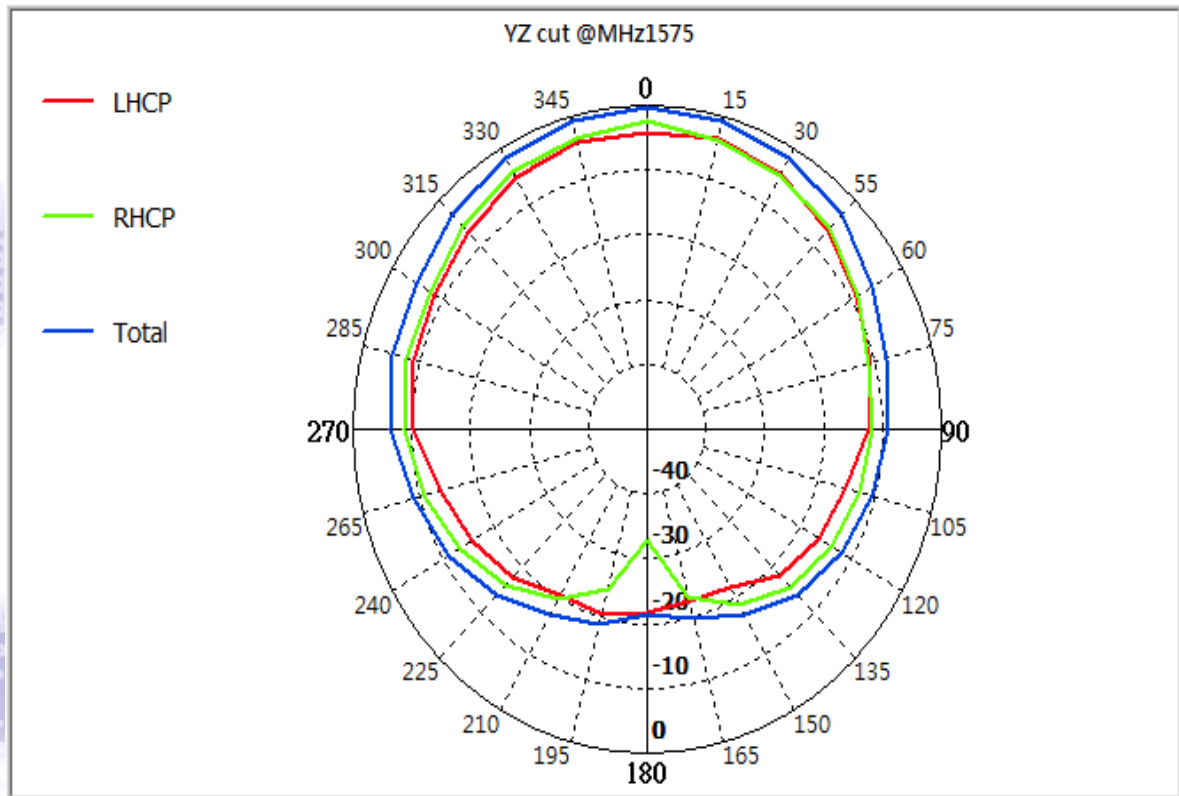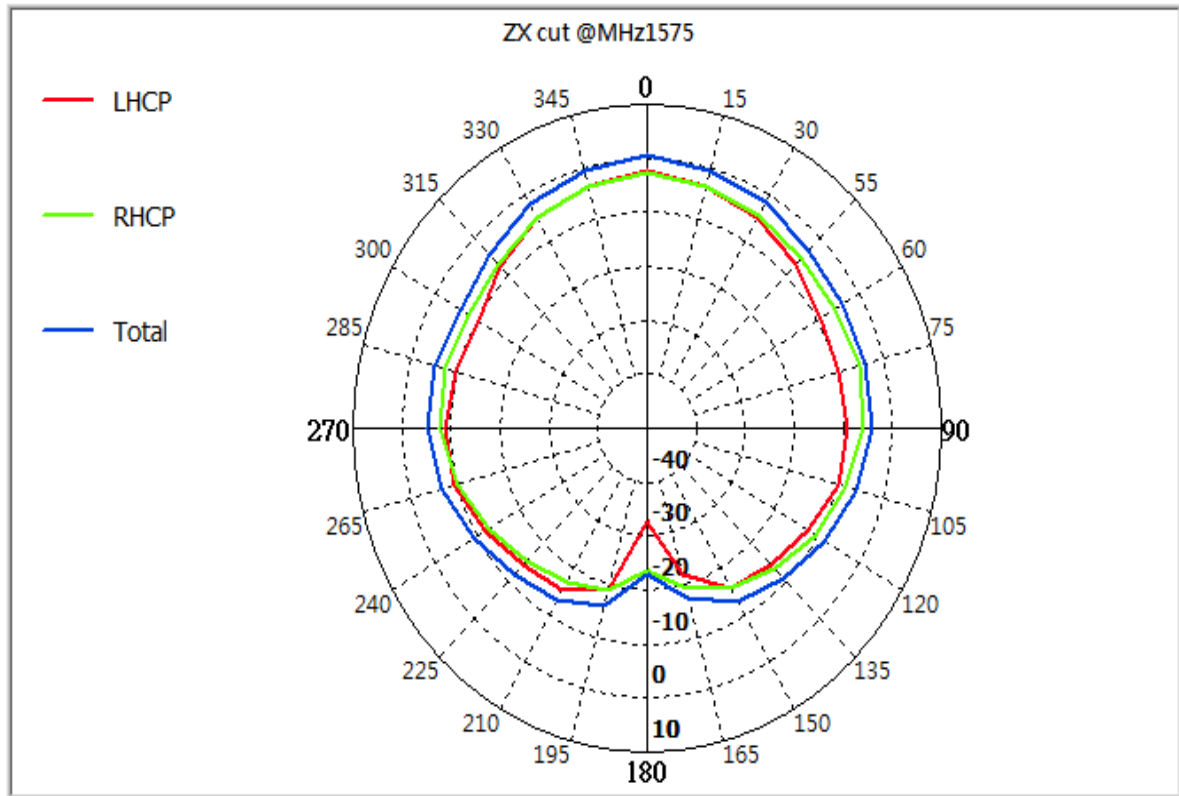


© Unictron Technologies Corp.
All specifications subject to change without notice.



b) 1602MHz (unit: dBi)

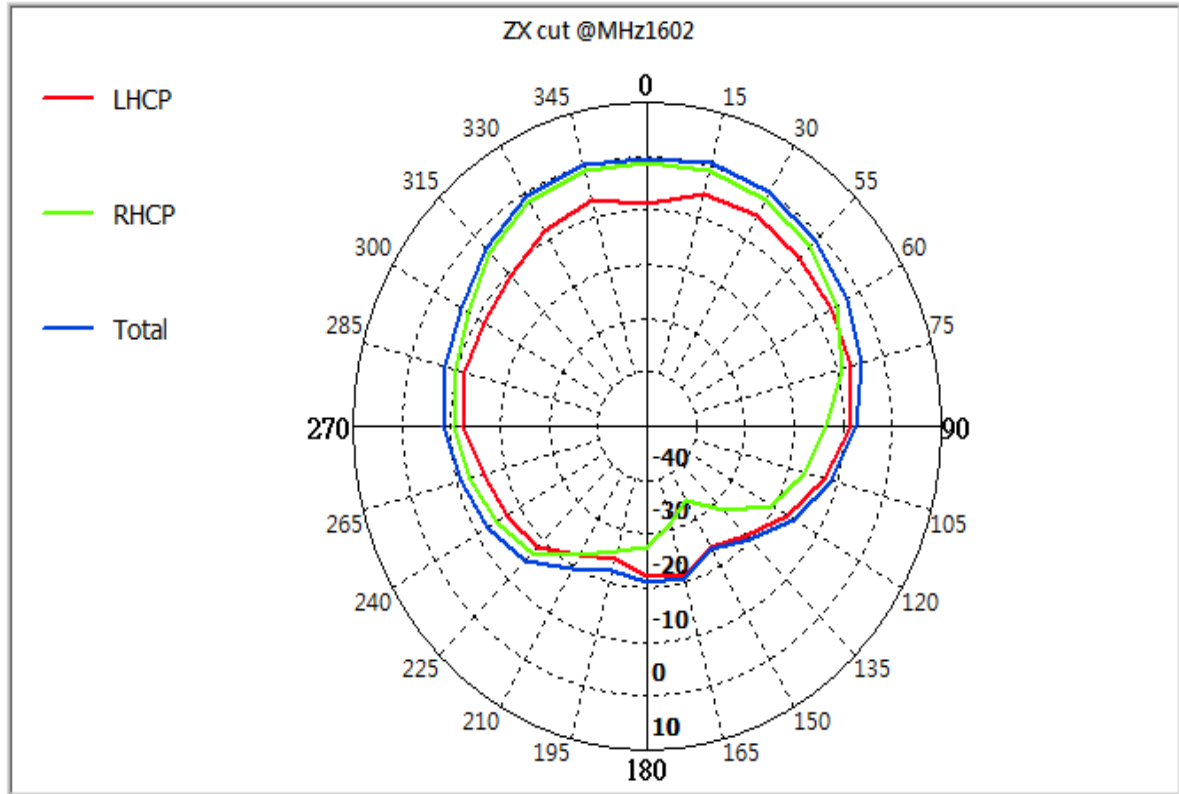

© Unictron Technologies Corp.
All specifications subject to change without notice.

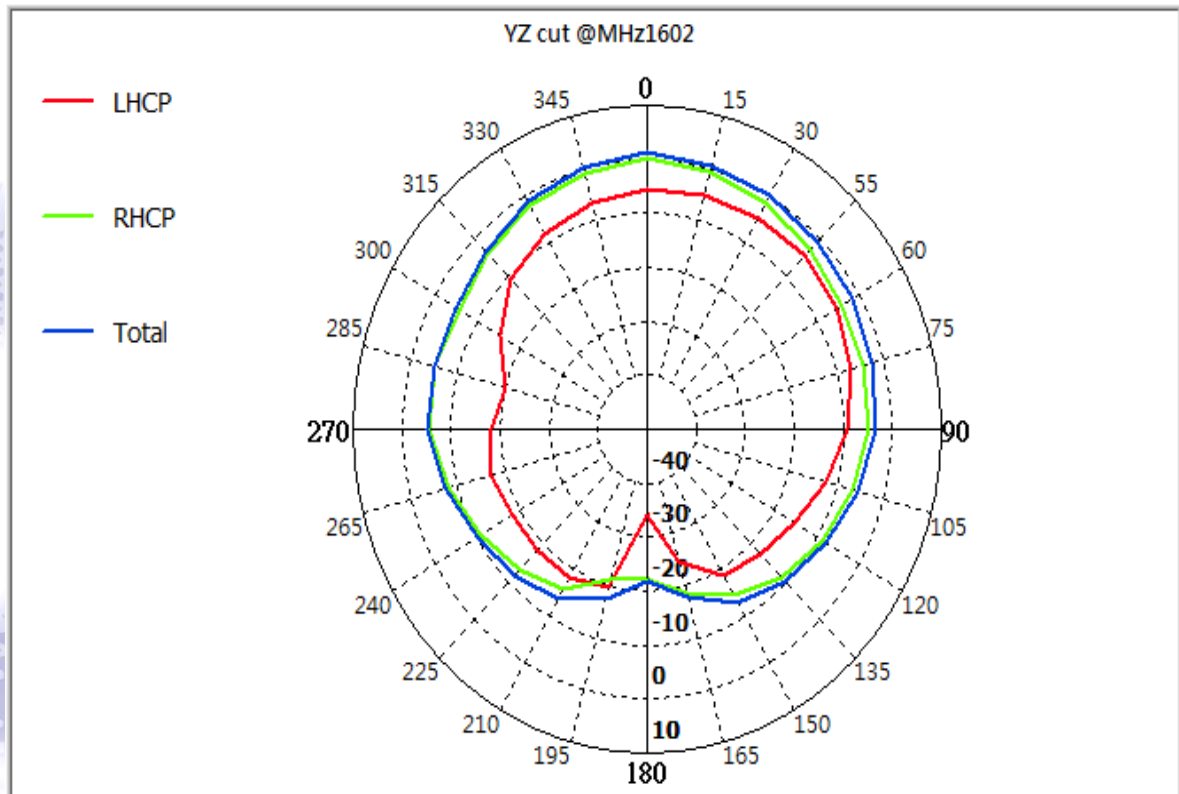


c) 1176.45 MHz (unit: dBi)

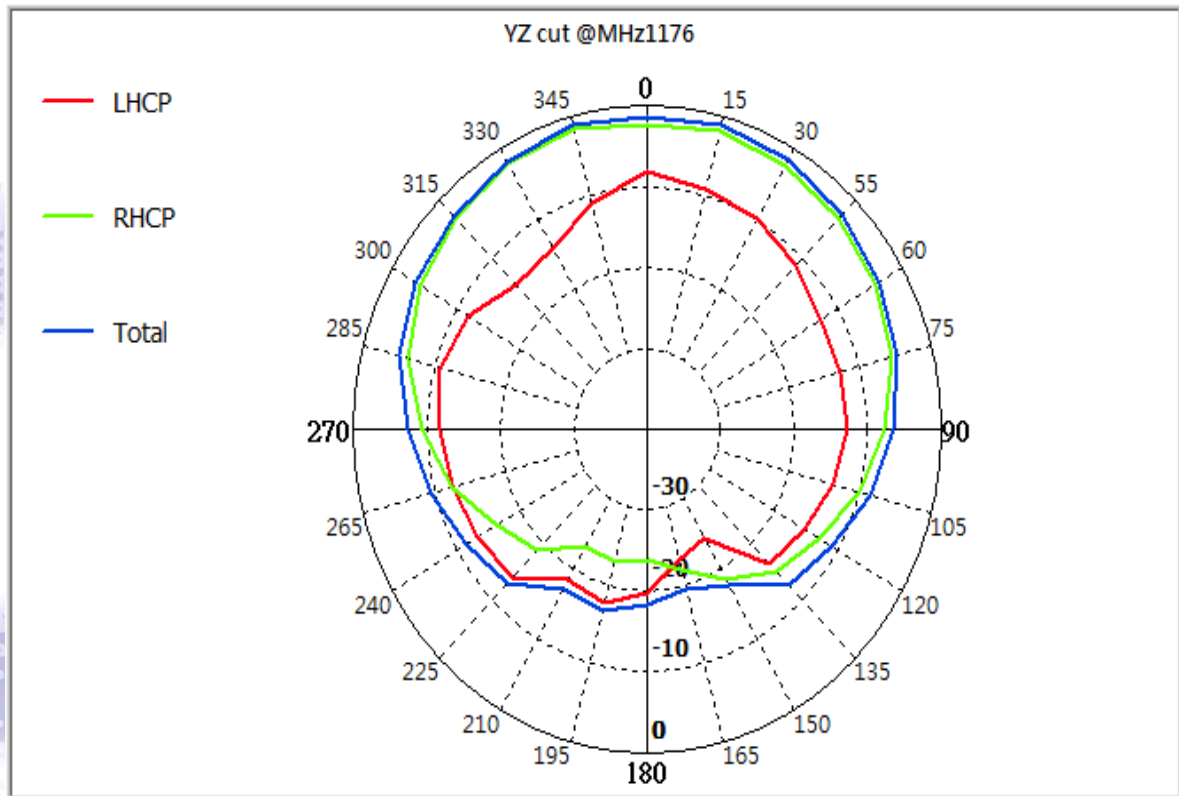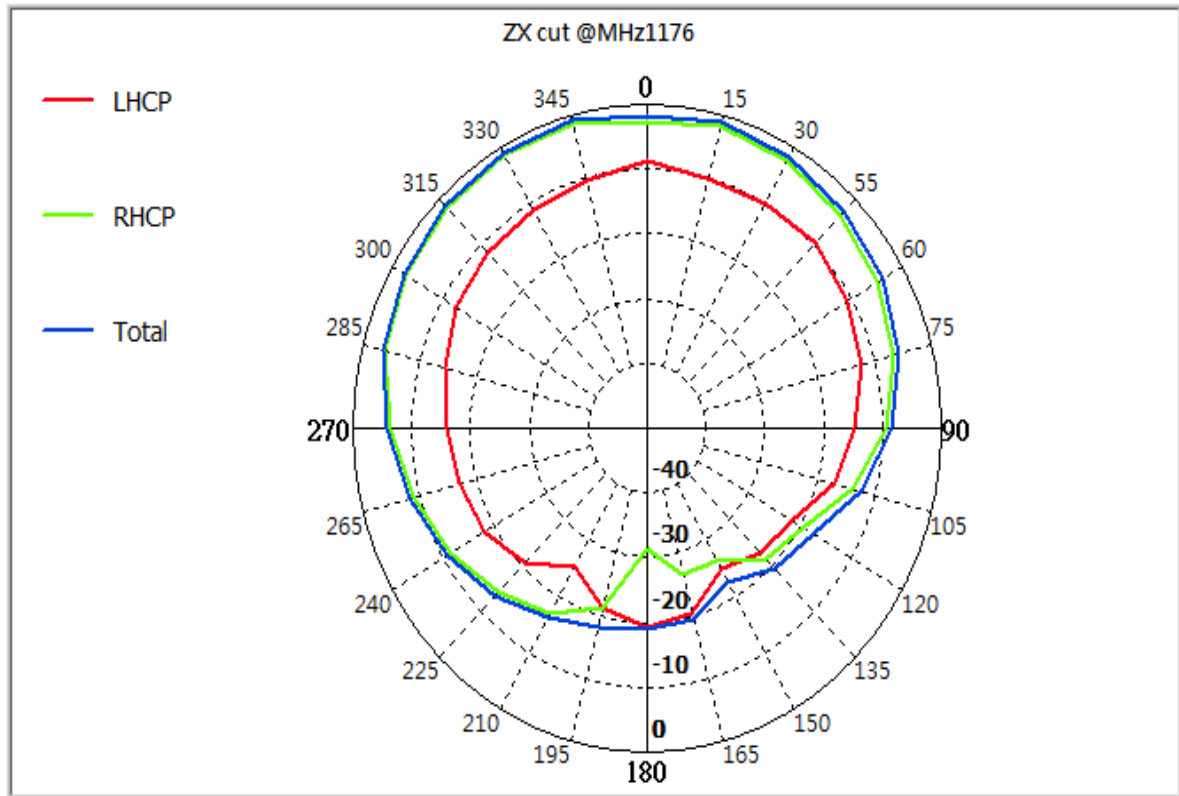


© Unictron Technologies Corp.
All specifications subject to change without notice.

VI. Low noise amplifier (LNA):


a) S11: (The input power of network analyzer is -40dBm)

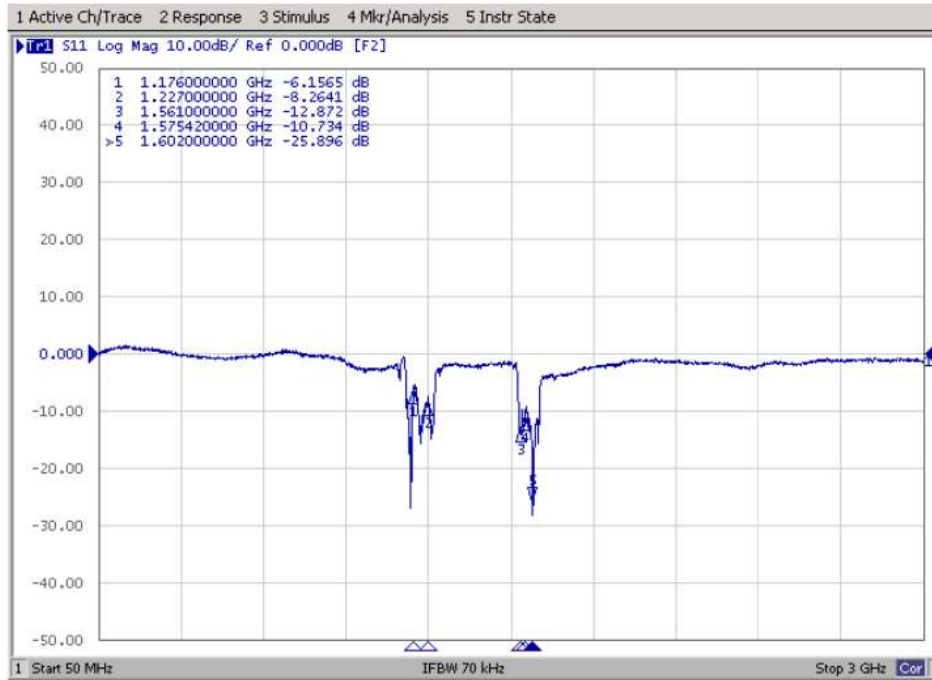


b) S12: (The input power of network analyzer is -40dBm)

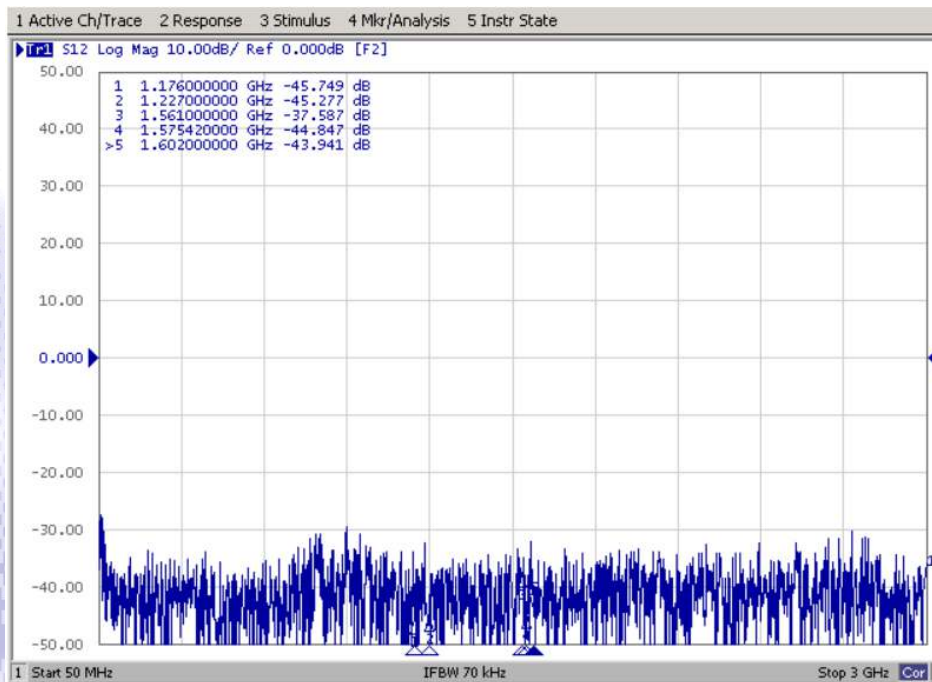

c) S21: (The input power of network analyzer is -40dBm)

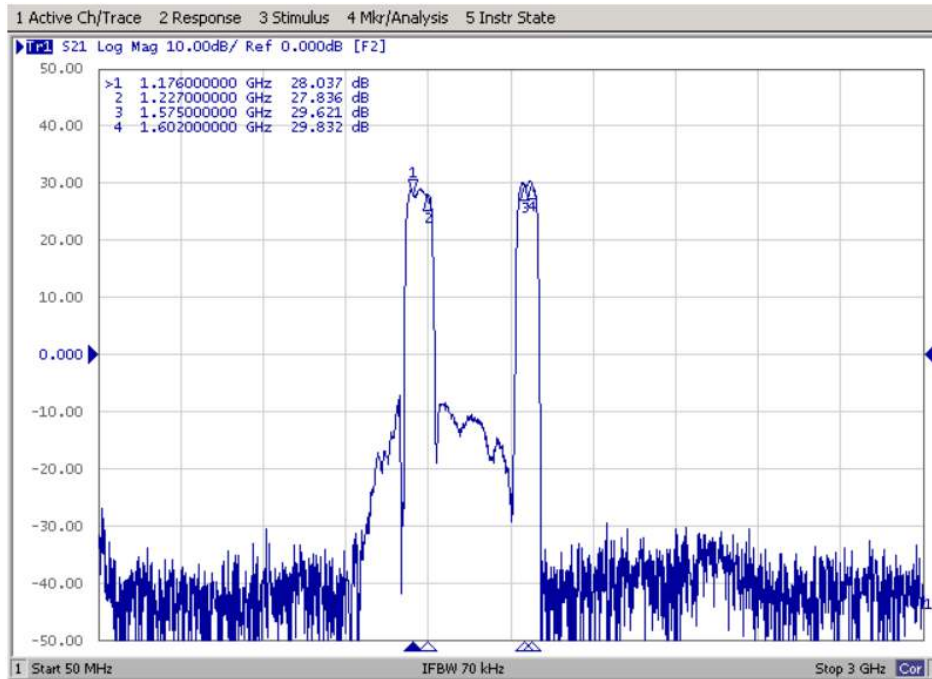


d) S22: (The input power of network analyzer is -40dBm)

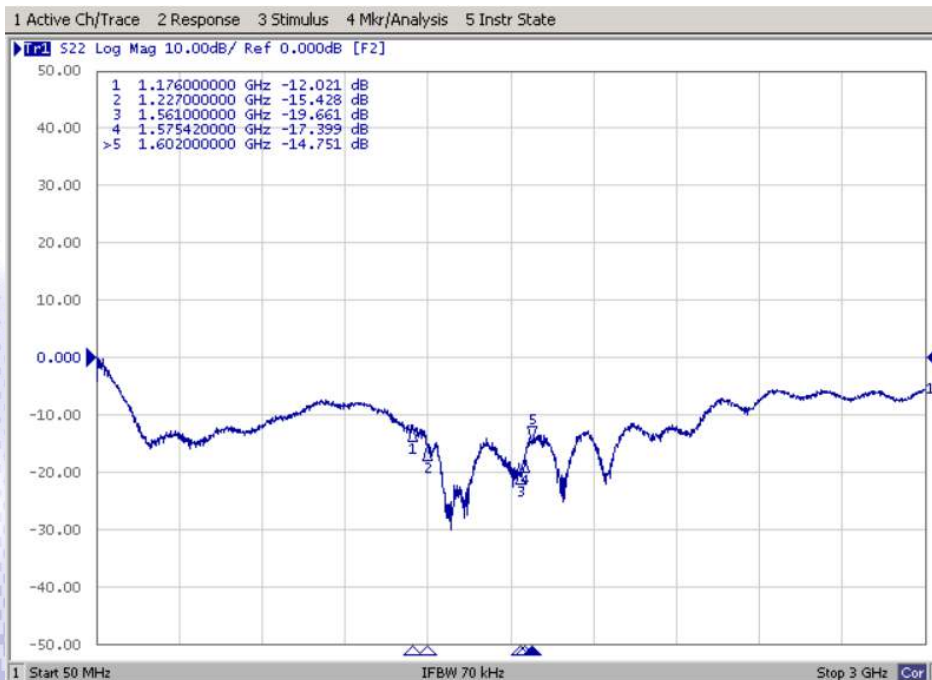

© Unictron Technologies Corp.
All specifications subject to change without notice.

e) N.F(Noise Figure)

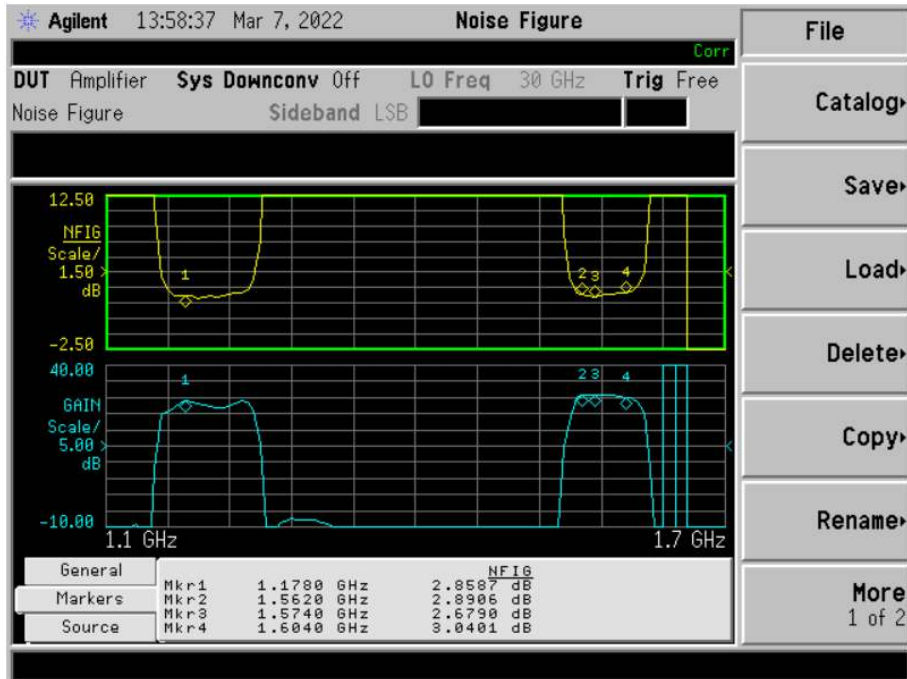






© Unictron Technologies Corp.
All specifications subject to change without notice.

VII. Package

- a) Weight:
Unit Weight: 11 ± 1 (g)
- b) Quantity:
Each PE : 5 pcs
Each outer carton : 500 pcs

© Unictron Technologies Corp.
All specifications subject to change without notice.

Step	Pictures	Descriptions
1.		Attach the antenna module to the top right corner of the bubble bag (110x70x5mm).
2.		Stack five antennas facing up.
3.		Put the stack of five antennas into a #7 zipper bag and seal. (make sure to remove the air in the bag before sealing).
4.		Assemble partition cardboards and cartons. Place the packaged antennas into the cardboard partitions.

5		<p>Place the products into the cartons. Place two #7 zipper bags into each partition, 250 products per layer, two layers per carton, total quantity 500 products per carton.</p>
---	---	--

© Unictron Technologies Corp.
All specifications subject to change without notice.