
ALL DIMENSIONS ARE IN MM

CONFIDENTIAL & PROPRIETARY INFORMATION

This document contains Confidential and Proprietary Information of Alliance LLC, and all design, manufacturing, reproduction, use, and sale rights of such information are expressly reserved

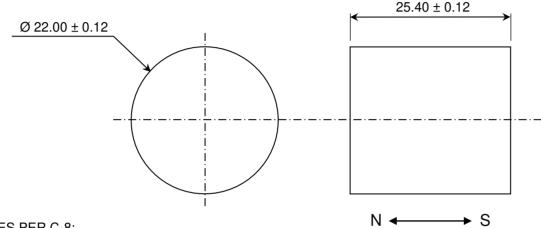

1. MAGNET PROPERTIES PER C-8:

Br: 3,800-4,100 G Hc: 2,600-3,000 Oe Hci: ≥2,700 Oe

BH_(max): 3.5-3.9 MGOe Magnetic loss: -0.18%Br/°C

2. MAGNETIZED THROUGH LENGTH

(1
4	
	REACH COMPLIANT

		(UNLESS OTHERWISE NOTED)	
Date	Ву		METRIC X = + 25
		$X.XXX = \pm .005 X.X$	_
		ANGLES ± .5° DO NOT SCALE DRAWING	
	Date	Date By	Date By DECIMAL N.XXX = ± .01 X.XXXX = ± .005 X.XXXX = ± .5°

TOLERANCES

Alliance LLC 1450 CLARK DRIVE, VALPARAISO, INDIANA 46385

P/N: YB-159-1 SENSOR MAGNET

MATERIAL: FERRITE Dwg by: BT REV LEVEL: A

COATING: NONE Apr by: DV Apr. Dated: 03-24-2017