


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.2025, FS	08/06/03	DMR
B	REDRAW PICTURE, RFS.4185, DMR	08/03/04	BS

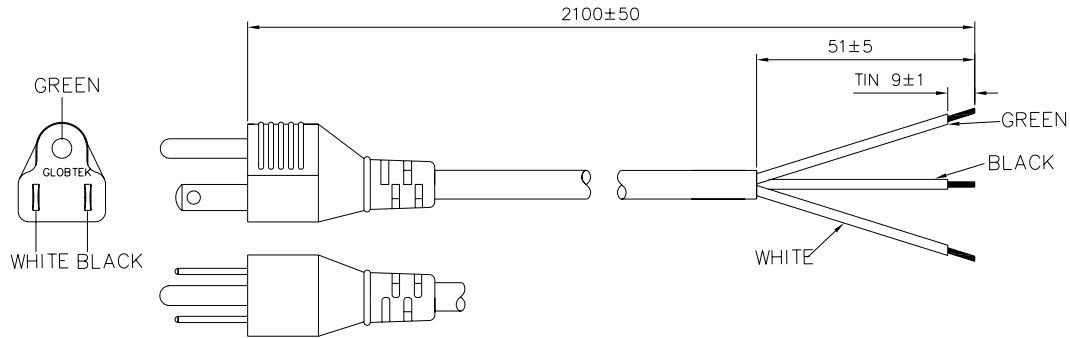

1.GENERAL SPECIFICATIONS:

RATING: 10A / 125V AC
 CABLE TYPE / SIZE: SJT, # 18 AWG, 3 CONDUCTOR
 TEMPERATURE RATING: 60° C
 CONDUCTOR COLORS: BLACK / WHITE / GREEN
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 2100 ± 50 mm (83 INCH)
 CABLE OUTER DIAMETER: 7.8 ± 0.2 mm
 END 'A' PLUG; NEMA 5-15P
 END 'B' SEE TERMINATION TABLE
 APPROVALS PLUG: UL, CSA OR cUL
 APPROVALS CABLE: UL, CSA OR cUL

2.PACKING:

BULK PACKED, BUNDLES OF 25.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

3.NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



CONDUCTOR TERMINATION TABLE:

Wire	Color	ROJ± 5 mm	STRIP±1mm	TERMINATION
NEUTRAL	WHT	51	9	TIN
LINE	BLK	51	9	TIN
GROUND	GRN	51	9	TIN



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
REV.	B			
SHEET	1			
INIT.BY: FS	DATE: 08/03/04	TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
DRAWN: NF	DATE: 08/03/04	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
APRVD:	DATE: 08/03/04	FSCN No.: G, YL	SIZE: A	REV. B
		SCALE: NONE	PART NO: 3021066F10TTT	SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice